

G NEMA series

Imperial units



NEMA helical & bevel helical gearmotors



Contents

1	Rossi for You	4
2	Features, benefits and range	8
3	Product Overview	16
4	Accessories and non-standard designs	94
5	Installation and maintenance	120
6	Technical formulae	131

Rossi for You



Innovation

Rossi offers a wide range of **solutions for an evolving industry**, flexible and innovative gearboxes and gearmotors for customer tailored solutions to maximize performance and minimize the total cost of ownership.



High quality, 3 years warranty

Our drive is to innovate and boost operations by manufacturing performing, precise, reliable and high-quality products all over the world. We are always one step forward in offering and developing solutions that can satisfy an unlimited number of application needs, even in the most demanding conditions.



Reliability

We are a reliable company with the right flexibility and know-how to respond to worldwide market requests, in all application fields, without leaving aside our commitment for the environment and value on human safety, to protect everyone's future.



Tools and processes

We continue to invest in new tools and processes, so our highly skilled specialist team in different fields are supporting you to find the best solution suitable for your demands, always by your side on every step of the project.



After-sale service

Highly trained mechanics and support teams can ensure a fast and efficient after-sale service providing support worldwide.



Digital support

Alongside our 24/7 **Rossi for You** support portal you have a suite of digital support tools enabling real time access to your order tracking, invoices, spare part tables download and contact to our service.

70
years

Experience

Shaped by 70 years of history Rossi meets your unique needs whether you need a standard design or a customized solution.



Global presence local service



Local support

Sales, customer service,
technical support, spare parts




15 branches*



Worldwide distribution network*

A widespread sales network of subsidiaries and dealers in nearly all industrialized countries. By your side from the design to after-sale phase, Rossi is a flexible and dependable partner throughout the world.

Rossi for You, our customer web portal, provides a 24/7 global coordination of the ordering, supply and service processes.

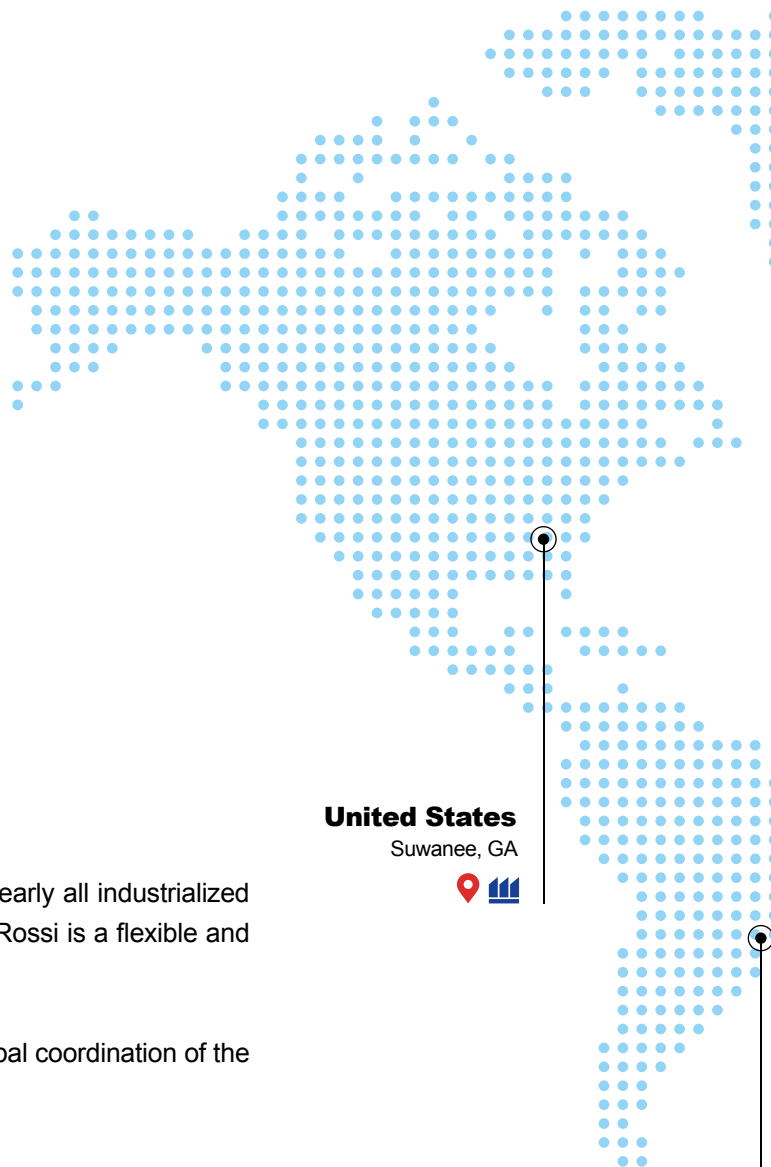

United States

Suwanee, GA



Brazil

Cordeiropolis, SP



*All contacts available on www.rossi.com



Headquarters



Branches



Production facilities/Assembly plants

United Kingdom

Coventry



Netherlands

Panningen



Germany

Dreieich



Poland

Wroclaw



Turkey

Izmir



China

Shanghai



Suzhou



Taiwan

Kaohsiung City



Spain

Barcelona



France

Saint Priest



Italy

Modena



Ganaceto



Lecce



India

Coimbatore



South Africa

La Mercy



Australia

Perth




Malaysia

Kuala Lumpur




Features, benefits and range

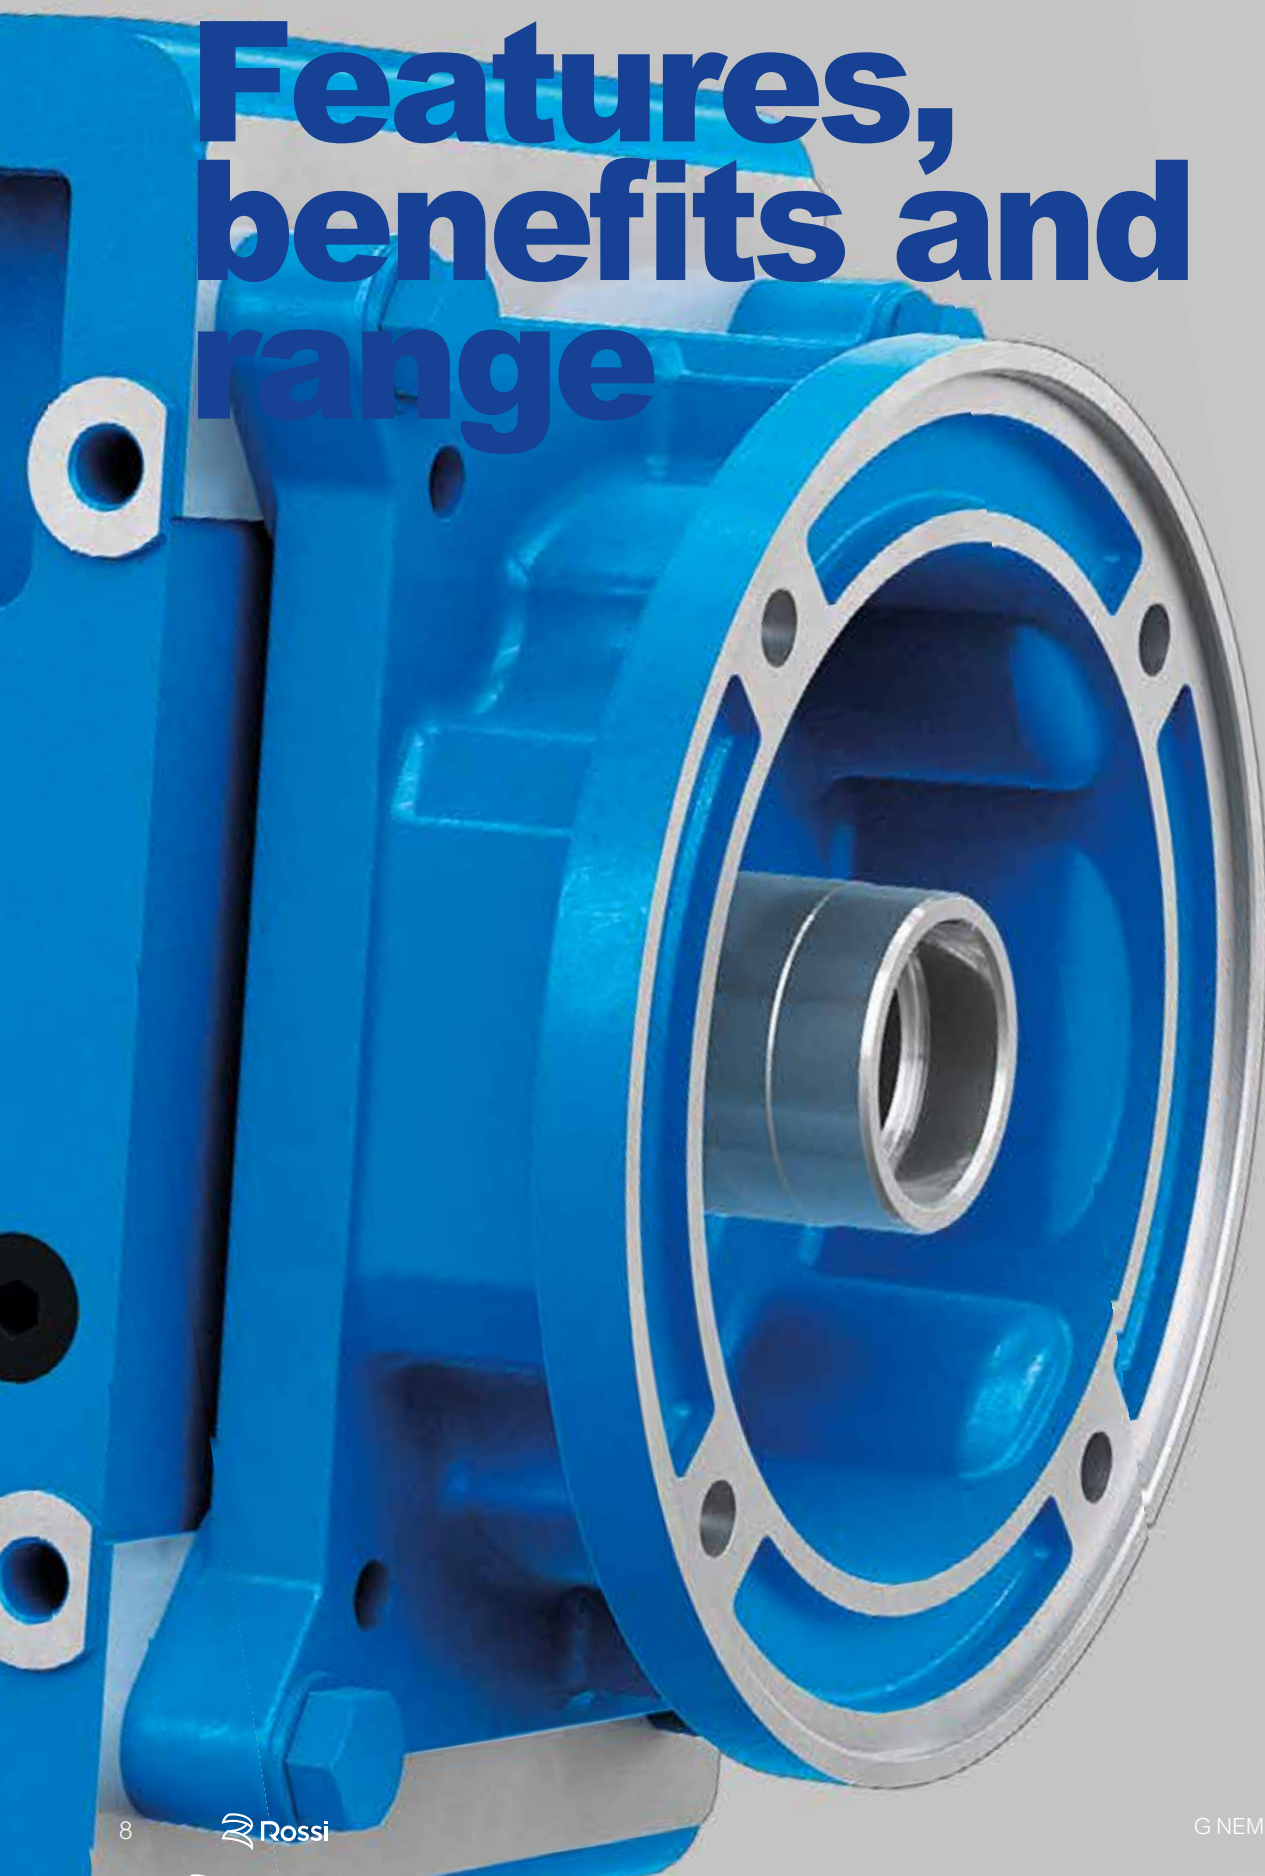



Maximum performance

We drive the heaviest applications
worldwide



Sustainability

We care
about environment



Modular system

For cost-effective
and high quality solutions



Innovation

We are constantly thinking forward,
solutions for an evolving industry




Digitalization

Rossi for You is always at your disposal
for any info



Know-how

We support you through
interdisciplinary know-how



Customization

Cost-effective solutions starting from
standard products

Universal «symmetrical» mounting: suitable for horizontal or vertical mounting

Rigid and precise cast iron single-piece housing; high oil capacity

Standard hollow low speed shaft, prearranged for installation of backstop device

Possibility of fitting particularly powerful motors and capability of withstanding high loads on the shaft end

Intermediate sizes 140, 180, 225, 280, 360 - dimensions similar to previous sizes 125, 160, 200, 250, 320 - conceived to be also a supporting series in particular applications; one size pairs, standard and strengthened, 320 and 321

Manufacturing and product management flexibility

High manufacturing quality standards

Minimum maintenance requirements

High, reliable and tested performance


“Long” series of helical gearmotors for applications with U position of motor/machine shaft and considerable distance between input and output shafts; same input and output coupling dimensions, same transmission ratios and performances, same combinations of motors and gear reducers as the standard series (**patent pending**).

This series of gearmotors combines and exalts the traditional qualities of helical and bevel helical gearmotors – **strength, accuracy, and reliability** – with advantages derived from modern design, manufacturing and operating criteria – **suitability for the heaviest duties, universality and ease of application, comprehensive size range, service, economy** – the advantages typically associated with high quality gear reducers produced in large series.

2.1 - Gearmotor

Main structural features

- **universal** mounting having feet integral with housing on 4 faces and B14 flange on 2 faces, B5 flange with spigot recess mountable on the faces with B14 flange (see ch. 4); the drawing and the strength of housing allow **interesting shaft mounting arrangements**, foot mounted motor coupling arrangement (see ch. 4) and attachments points for a variety of equipment;

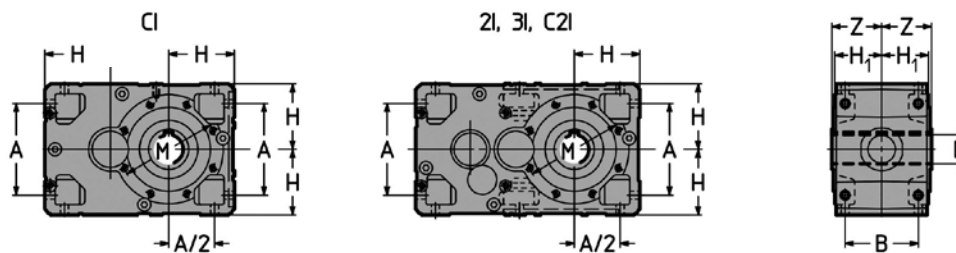

Fully interchangeable products of the same size independently from train of gears.

- gearmotor overall dimensions are suitable to be equipped with large motor sizes transmitting **high nominal and maximum torques**, supporting **high loads on low and high speed shaft ends**;
- standard hollow low speed shaft in steel, with keyway; solid (left or right hand extension) or double extension low speed shaft (see ch. 4).
- improved and upgraded modular construction both for component parts and assembled product;
- standardized dimensions and compliance with standards;
- hollow low speed shaft with inch dimensions, as standard;
- NEMA C standard motor directly fitted into hollow high speed shaft; with motors size $\geq N320TC$, to obtain easier installing and removal and avoid fretting corrosion, bevel helical gearmotors (CI, C2I) have a keying system with key and bronze bushing whereas helical gearmotors (2I, 3I) have a keying system with hollow high speed shaft with longitudinal cuts, shrink disc and key for a perfect alignment;

- taper roller bearings, excluding some shafts (high speed shaft) on which bearings are cylindrical roller or ball type;
- **cast iron** single-piece housing 200 UNI ISO 185 (**spheroidal** UNI ISO 1083 for sizes 140, 180, 225) with **stiffening ribs and high oil capacity**;
- oil bath lubrication; synthetic or mineral oil (ch. 5) with filler plug and valve, level and drain plug, supplied **without oil**; sealed;
- additional bearings lubrication through proper pipelines or pump;
- natural or forced cooling (fan – also in **flange** mounting – and/or coil, see ch. 4);
- **paint external** coating in acrylic alkyd enamel resistant to atmospheric and aggressive agents (corrosivity category C3 ISO 12944-2); suitable for further coats only with dual-compound products after degreasing and sanding; color blue RAL 5010 DIN 1843, other colors and/or painting cycles on request see ch. 4); **internal** protection with synthetic paint suitable to resist polyalphaolefines based synthetic or mineral oils;
- non-standard designs: backstop device, supplementary cooling and lubrication systems, shaft mounting arrangements, special paints (ch. 4);
- **helical «long» model**: it is derived from the standard one (completing it) through the addition of an **idle gear** between wheel and pinion of the second-last reduction stage (first reduction stage for 21 train of gears) hence allowing to **distance considerably** the input and output shafts, whilst maintaining the same **specifications and performances** as the standard model. In particular:
 - same **input and output coupling dimensions** (shafts and B14 output flange, motor sizes);
 - same high speed shaft **bearing** (shafts and bearings) with the same transmission ratio;
 - same **foot mounting dimensions** (A_1 dimension excluded);
 - same **transmission ratios and performances**;
 - same **combinations of motors and gear reducers**;
 - same **thermal power** (thanks to the greater length of the housing);
 - same **accessories** and non-standard **designs**;
 - same **high quality level** (design solutions, production processes and tests, components, single-piece housing, modular and aesthetic design).

The «long» gearmotor obtained through this new design concept, makes possible also very low transmission ratios with proportioned and generous bearings in terms of high speed shaft roller bearings and shaft diameters. Everything stated in this catalog is to be intended **valid both for standard and long model**, except otherwise stated.

Train of gears

- 2, 3 helical gear pairs (helical gearmotors);
- 2, 3 helical gear pairs and **1 idle gear** («long» model, helical gearmotors);
- 1 bevel gear pair plus 1, 2 helical gear pairs (bevel helical gearmotors);
- 1 size with final reduction center distance to R 10 (125); 9 sizes with final reduction center distance to R 20 (140 ... 360, with 1 size pair: standard and strengthened);
- nominal transmission ratios to R 10 ($i_N = 2.5 \dots 160$) for helical gear units; to R 10 ($i_N = 5 \dots 200$ for bevel helical gear units; to R 20 ($i_N = 9 \dots 90$), for all sizes 140 ... 360;
- casehardened and hardened gear pairs in 16 CrNi4 or 20 MnCr5 steel (depending on size) and 18 NiCrMo5 according to UNI EN 10084;
- helical gear pairs with **ground** profile;
- GLEASON spiral bevel gear pairs with **ground** or accurately lapped profile;
- gear load capacity calculated for tooth breakage and pitting.



Helical gearmotor with **backstop device**
(always prearranged)



Bevel helical gearmotor CI (also C2I) with high speed shaft for **90° multiple drives**.

Specific standards

- nominal transmission ratios and principal dimensions according to UNI 2016 (DIN 323-74, NF X 01.001, BS 2045-65, ISO 3-73);
- toothing profile to UNI 6587-69 (DIN 867-86, NF E 23.011, BS 436.2-70, ISO 53-74);
- shaft heights to UNI 2946-68 (DIN 747-76, NF E 01.051, BS 5186-75, ISO 496-73);
- fixing flanges B14 and B5 (the latter with spigot «recess») taken from UNEL 13501-69 (DIN 42948-65, IEC 72.2);
- medium series fixing holes to UNI 1728-83 (DIN 69-71, NF E 27.040, BS 4186-67, ISO/R 273);
- helical shaft ends (long or short) to UNI ISO 775-88 (DIN 748, NF E 22.051, BS 4506-70, ISO/R775) with tapped butt-end hole to UNI 9321 (DIN 332 Bl. 2-70, NF E 22.056) excluding correspondence d-D;
- parallel keys UNI 6604-69 (DIN 6885 Bl. 1-68, NF E 27.656 and 22.175, BS 4235.1-72, ISO/R/773-69 / ANSI B17.1) except for specific cases of motor-to-gear reducer coupling where key height is reduced;
- mounting positions derived from CEI 2-14 (DIN EN 60034-7, IEC 34.7);
- load capacity verified according to UNI 8862, DIN 3990, AFNOR E 23-015, ISO 6336; thermal capacity verified.

Size
 T_{N2} [lb in] - F_{r2} [lb]

CI

2I

3I

2I «long»

3I «long»

C2I

125

30 700 - 4 500




140

45 000 - 6 300



160

69 000 - 8 000




180

97 500 - 10 000





200

136 000 - 12 500






225

195 000 - 16000




250

280 000 - 20 000




280

387 000 - 25 000




320

487 000 - 31 500





321

615 000 - 31 500



360

775 000 - 40 000



Symbols and Units of Measurements

All dimensions in the catalog are expressed in mm except where otherwise stated

Symbol	Description	Unit	Symbol	Description	Unit
f	frequency	Hz	T_2	gear reducer output torque (low speed shaft), derived from input power and speed	lb in
F	force	lb	T_{2eq}	load cycle equivalent torque	lb in
F_r, F_a	radial (overhung) loads, axial (thrust) loads	lb	T_{N2}	gear reducer nominal output torque (low speed shaft)	lb in
f_s	service factor	–	T_{2i}	gear reducer output torque (low speed shaft), during load cycle interval i	lb in
f_t	thermal factor	–	T_s	screw tightening torque	N m
G	weight (weight force)	lb	T_{start}	motor starting torque	lb in
i	transmission ratio	–	T_{brake}	motor braking torque	lb in
i_N	nominal transmission ratio	–	$T_{ambient}$	ambient temperature	°F
L_h	total duration of load cycle	h	T_{oil}	oil temperature	°F
L_{WA}	sound power level	dB(A)	t	time	s
m	mass	lb	t_a	starting time	s
M_b	bending moment	lb in	t_b	braking time	s
n	angular speed	rpm	U	voltage	V
n_1	gear reducer input speed (high speed)	rpm	W	work, energy	10 ⁶ lb in
n_2	gear reducer output speed (low speed)	rpm	WK	moment of inertia	lb ft ²
n_{2eq}	load cycle equivalent speed	rpm	WK_0^2	moment of inertia (of mass) of the motor	lb ft ²
n_{N2}	gear reducer nominal output speed	rpm	WK_1^2	moment of inertia (of mass) of the gear reducer referred to high speed shaft	lb ft ²
n_{2i}	gear reducer output speed during load cycle interval i	rpm	WK_R^2	external (gear reducer, coupling, driven machine) moment of inertia (of mass) referred to high speed shaft	lb ft ²
P	power	hp	z	starting frequency	starts/h
P_1	gear reducer input power (high speed shaft), motor power	hp	z_0	no load starting frequency	starts/h
P_2	gear reducer output power (low speed shaft)	hp	α	angular acceleration	rad/s ²
P_{N2}	gear reducer nominal output power (low speed shaft)	hp	η	efficiency	–
P_t	thermal power	hp	φ	plane angle	rad
P_{tN}	gear reducer nominal thermal power	hp	φ_{a1}	revolution of motor shaft during acceleration	rad
P_{tth}	gear reducer equivalent thermal power	hp	φ_{b1}	revolution of motor shaft during deceleration	rad
T	torque	lb in	ω	angular velocity	rad/s

Additional indexes (subscripts) and other symbols

Index	Description	Index	Description
N	nominal	th	thermal
1	relating to high speed shaft (input)	c	cycle
2	relating to low speed shaft (input)	–	from ... to
max	maximum	≈	approximately equal to
min	minimum	≥	greater than or equal to
eq	equivalent	≤	less than or equal to


Unit conversion table

Description	Imperial units		International System of Units (SI), Technical System (metric)	
Length, Distance	1 inch	[in]	= 0.0254	meter [m]
	1 foot	[ft]	= 0.3048	
Mass	1 pound	[lb]	= 0.4536	kilogram [kg]
	1 ounce	[oz]	= 0.0283	
Volume	1 US liquid gallon	[gal]	= 3.7854	liter [l]
Temperature	1 Fahrenheit degree	[°F]	= 1.8 · °C + 32	Celsius degree [°C]
Force	1 pound-force	[lb _f]	= 4.4482	newton [N]
			= 0.4536	kilogram force [kg _f]
Power	1 horse power	[hp]	= 0.7457	kilowatt [kW]
Torque, Work	1 pound-force inch	[lb _f in]	= 0.1130	newton meter, joule [N m], [J]
			= 0.0115	kilogram-force meter [kg _f m]
	1 pound-force foot	[lb _f ft]	= 1.3560	newton meter, joule [N m], [J]
			= 0.1383	kilogram-force meter [kg _f m]
Pressure	1 pound-force per square inch (psi)	[lb _f /in ²]	= 0.0689	bar [bar]
Moment of inertia	1 WK ²	[lb _f ft ²]	= 0.0421	kilogram square-meter [kg m ²]

blank page

Product overview



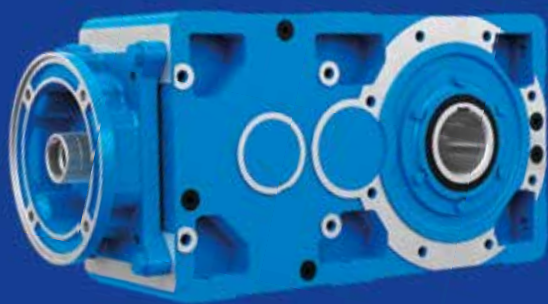

Section content

3.1	Designation	18
3.2	Service factor	21
3.3	Thermal power	23
3.4	Selection	26
3.5	Structural and operational details	28
3.6	Selection tables (helical gearmotors)	38
3.7	Designs, dimensions, mounting positions (helical gearmotors)	50
3.8	Selection tables (bevel helical gearmotors)	62
3.9	Designs, dimensions, mounting positions (bevel helical gearmotors)	74
3.10	Axial loads or radial loads on low speed shaft end	80


MR C2I 200 U O 2 V - N250TC - 35.3 V5

Helical gear pairs:	Bevel helical gear pairs:
2I 2 helical gear pairs	CI 1 bevel and 1 helical gear pair
3I 32 helical gear pairs	C2I 1 bevel and 2 helical gear pairs

Gearmotor mounting position


Gearmotor mounting positions are described in ch. 3.7 and 3.9 (the mounting position designation refers to foot mounting only, even if gear reducers are for universal mounting; e.g.: B14 flange fastening and derivatives; B5 flange fastening and derivatives, see ch. 4). Here following some designation examples of important mounting positions.

1. **Standard B3** mounting position; when having no particular needs, **prefer B3 mounting position** for its technical and economic cost effectiveness (maximum simplification of lubrication system, lower oil splash, lower gear reducer heating, stock availability).




2. Non-standard mounting positions


- 2a. Mounting position as per catalog (see ch. 3.7 and 3.9), **only one and fixed**, differing from B3; e.g.: mounting position **B6**




- 2b. **Inclined and fixed** mounting position; e.g.: mounting position **B6 - 20° B3**



- 2c. **One only** mounting position **but defined within a pre-determined angle**; e.g.: mounting position within **B6 - 20° B3 / B6 - 65° B8**



- 2d. **Oscillatory** mounting position (gear reducer oscillating when running); e.g.: mounting position **B6 - 20° B3 / B6 - 65° B8 oscillatory**



Input speed

Complete the designation stating the input speed n_1 , in the following cases:

- $n_1 > 1800$ rpm or $n_1 \leq 355$ rpm;
- for cases highlighted with following symbols ($\blacktriangle$, Ψ , Φ) (ch. 3.7 and 3.9);
- when forced cooling is required.

Example:

MR C2I 200 UO2V-N320TC - 62,6 $n_1 = 2000 - 600$ rpm

Accessories and non-standard designs

In the event of a gear reducer or gearmotor being required in a design different from those stated above, specify it in detail (ch. 4).

Service factor f_s takes into account the different running conditions (nature of load, running time, frequency of starting, speed n_2 , other considerations) which must be referred to when performing calculations of gear reducer selection and verification.

The **minimum service factor required** is given by:

$$f_s \text{ required} \geq f_{s1} \cdot f_{s2} \cdot f_{s3} \cdot f_{s4} \cdot f_{s5}$$

or, in case of selection according to $n_2 \cdot L_h$:

$$f_s \text{ required} \geq f_{s1}(8 \text{ h/d}) \cdot f_{s2} \cdot f_{s3} \cdot f_{s4}$$

Service factor f_{s1} according to **nature of load** and to **running time**

Details and considerations about service factor.

Nature of load of driven machine ¹⁾		$f_{s1}^{2)}$ Running time [h/d] $\leq$				
Ref.	Description	2	4	8	16	24
a	Uniform	0.8 ³⁾	0.9 ³⁾	1	1.18	1.32
b	Moderate overloads (1.6 x normal)	1	1.12	1.25	1.5	1.7
c	Heavy overloads (2.5 x normal)	1.32	1.5	1.7	2	2.24

Service factor f_{s2} based on **nature of load** and of **frequency of starting**

Nature of load of driven machine ¹⁾		f_{s2} Frequency of starting z [starts/h]						
Ref.	Description	2	4	8	16	32	64	125
a	Uniform	1	1.06	1.12	1.18	1.25	1.32	1.4
b	Moderate overloads (1.6 x normal)	1	1	1.06	1.12	1.18	1.25	1.32
c	Heavy overloads (2.5 x normal)	1	1	1	1.06	1.12	1.18	1.25

Service factor f_{s3} based on **motor type**

Motor type Description		f_{s3}
Electric three-phase	$P_1 \leq 12.4 \text{ hp}$	1
	$P_1 > 12.4 \text{ hp}^{4)}$	1.06 ⁴⁾
Brake electric three-phase		1.06
Internal combustion	multi-cylinder	1.25
	single-cylinder	1.5

Service factor f_{s4} based on **reliability level**

Reliability level ⁵⁾	f_{s4}
normal	1
medium	1.25
high	1.4

Service factor f_{s5} based on **output angular speed** n_2

Output speed n_2 [rpm]	f_{s5}
560 – 355	1.25
355 – 224	1.18
224 – 140	1.12
140 – 90	1.06
< 90	1

f_s values stated above are valid for:

- maximum time on overload 15 s, on starting 3 s; if over and/or subject to heavy shock effect, consult us;
- a whole number of overload cycles (or start) **imprecisely** completed in 1, 2, 3 or 4 revolutions of low speed shaft; if **precisely** a continuous overload should be assumed;

Motors having a starting torque not exceeding nominal values (star-delta starting, particular types of motor operating on direct current, and single-phase motors), and gear reducer and driven machine and particular types of coupling between gearmotor and driven machine (flexible, centrifugal, fluid and safety couplings, clutches and belt drives) affect service factor favourably, allowing its reduction in certain heavy-duty applications; consult us if need be.

1) For indication on the type of load of the driven machine according to the application, see table on next page.

2) When selecting with $n_2 \cdot L_h$, use exclusively the column 8 h/d.

3) When having variable load verify each load cycle interval.

4) For Y-Δ starts, running with inverter or «soft start» devices, $f_{s3}=1$.

5) Reliability degrees higher than normal are required in presence of: very difficult maintenance, great importance of gear reducer in the production cycle, safety, etc.

Classification of nature of load according to application

Application	Ref. load ★	Application	Ref. load ★	Application	Ref. load ★
Stirrers and mixers Liquids: – constant density – varying density, solids in suspension, high viscosity concrete mixers, mullers, flash mixers, concrete mixers, mullers, flash mixers	a b c	mechanical loaders, pallet stackers conveyors for: – boards, chips, waste – logs machine tools (planing, cutting, cross-cut and re-sawing, tenoning, bevelling, moulding, sanding, sizing and scratch-brushing machinery etc.): – feed drive – cutter drive barkers: – mechanical and hydraulic – drum	a, b b c	transverse drive rollers, draw benches, coilers, inverter, draglines, flattening rolls, bending rolls pushers, descaling equipment, pipe welders, mill roll train drives, rolling mills, forging presses, billet croppers, power hammers, punches, impact extruders, tapping machines, straightening presses Rollerways	b c
Feeders and batchers rotary (roller, table, sector) belt, screw, plate reciprocating, shaker	a a, b c	Oil industry paraffin filter presses, chillers rotary drilling equipment pumping equipment	b b, c b c	Mills rotary (rod, roller, pebble, ball) hammer, pin crusher, centrifugal, impact, rolling (ball or roller)	b, c ³⁾ b c
Compressors centrifugal (single-stage, multi-stage) rotary (vane, lobe, screw) axial reciprocating: – multi-cylinder – single-cylinder	a b b c	Textile industry calenders, cards, pickers, dryers, nappers, spinners, slashers, pads, soapers, washers, mangles, tenter frames, looms (Jacquard), warping machines, winders, knitting machines, dyeing machines, twisting frames, gig mills, cutters	b c b c	Pumps rotary (gear, screw, lobe, vane) and axial centrifugal: – liquids, constant density – liquids, variable density or high viscosity proportioning alternative: – single acting (≥ 3 cylinders), double acting (≥ 2 cylinders) – single acting (≤ 2 cylinders), double acting single cylinder	a, b a b b c
Elevators belt, centrifugal or gravity discharge, screw jacks, escalators bucket, arm and tray elevators, paddle wheel, hoists, skips man lifts, mobile scaffolding, passenger transport (cable cars, chair, ski, gondola lifts etc.)	a, b b a, b	Clay working machinery pug mills, extruders, rotary deslimers brick and tile presses	b	Rotating drums dryers, chillers, rotary kilns, washing machines tumblers, cement kilns	b c
Excavators and dredges cable reels, conveyors, pumps, winches (manoeuvring and utility), stackers, draining wheels cutter head drives, cutters, excavators (bucket ladder, paddle wheel, cutter) vehicles: – on rails – crawlers	b c b c	Rubber and plastics industries extruders: – plastics – rubber mixing mills, warming mills, friction calenders, refiners, tubers and strainers, rolling mills crackers, masticators	b c b c	Transport conveyors belts (plastic, rubber, metal) for: – fine grade loose material – coarse grade loose material or discrete items belt, apron, bucket, slat, tray, roller, screw, chain, overhead rail, assembly drag (slat, flight, chain, Redler, etc.) ground level chain, flow accumulating reciprocating, shaker overhead power rail	a b b b b c ⁴⁾
Crushers and granulators sugar cane, rubber, plastics minerals, stone	b c	Wrapping and stacking machinery wrapping (film, cardboard), binding, strapping and labelling equipment palletizing/depalletizing and stacking/unstacking machinery, palletizing robots	b c	Sewage treatment biological tanks (revolving disk) dewatering screws, collectors, rotary screens, thickeners, vacuum filters, anaerobic digestion tanks aerators, rotary breakers	a b c
Cranes, winches and travelling lifts travel (bridge, trolley, forks) ¹⁾ slewing hoist ²⁾	b b a, b	Engineering machine tools boring, shaping, planing, broaching, gear cutting and FMS machines, etc.: – main drivers (cut and feed) – auxiliary drives (tools magazine, chip conveyor, workpiece infeed)	b b a	Screen and riddles air washing, travelling water intake rotary (stone, gravel, cereals) vibrating screens, riddles, jigs	a b c
Food industry cookers (cereals and malt), mash tubs slicers, dough mixers, meat grinders, beet slicers, centrifuges, peelers, winemaking plant, bottle/bin/crate washers, rinsers, fillers, corkers, cappers, extruders, crate filling and emptying equipment	a	Mechanisms indexing, crank and slotted link, Maltese cross, articulated parallelogram rod and crank, cam control (cam and tappet, cam and rocker)	b a	Fans small diameter (centrifugal, axial-flow) large diameter (mines, furnaces, etc.) cooling towers (inducted or forced draft), ducted, piston	a b
Paper mills winders, suction rolls, dryers, embossing machinery, bleachers, press rolls, coating rolls, paper rolls, beaters, and pulpers agitators, mixers, extruders, chip feeders, calenders, felt dryers and stretchers, rag grinders, washers, thickeners cutters, chippers, calenders (super), felt whippers, glazing machines, presses	a b c	Metal mills shears: – trimming, cropping, facing – for sheet/plate, ingots, billets	b c		
Lumber and woodworking industries					

* Nature of load reference admits of modification where precise knowledge of duty is available.

1) In the traverse movement of the bridge usually it is necessary to have at least $fs > 1.6$ and in the storeyard cranes $fs > 2$ (container handling).

2) For selection of fs to F.E.M./1-10.1987, consult us.

3) See cat. S.

4) See supplement to cat. A.

Nominal thermal power P_{tN} , written in red in the table, is that which can be applied at the gearmotor input, also for long model, without exceeding 203 °F ¹⁾ (95 °C) approximately oil temperature when operating in following running conditions:

- input speed $n_1 = 1\ 800$ rpm;
- mounting position B3;
- continuous duty S1;
- maximum ambient temperature 68 °F (20 °C) (in the table also the values referred to 104 °F (40 °C) are stated);
- maximum altitude 3 300 ft above sea level;
- air speed ≥ 4 ²⁾ ft/s (Value typical in presence of an gearmotor with self cooled motor).

T_{amb} °F	Gear red. size	Gear reducer size P_{IN} ²⁾ hp									
		125	140	160	180	200	225	250	280	320,321	360
68 °F (20 °C)	2I	–	42.5	56	63	90	100	140	160	224	250
	3I	–	35.5	47.5	53	75	85	118	132	190	212
	CI	35.5	47.5	53	75	85	118	132	190	–	–
	C2I	–	35.5	47.5	53	75	85	118	132	190	212
104 °F (40 °C)	2I	–	31.5	42.5	47.5	67	75	106	118	170	190
	3I	–	26.5	35.5	40	56	63	90	100	140	160
	CI	26.5	35.5	40	56	63	90	100	140	–	–
	C2I	–	26.5	35.5	40	56	63	90	100	140	160

Always verify that power applied P_1 is lower than or equal to gearmotor nominal thermal power P_{tN} , multiplied by the corrective coefficients f_1, f_2, f_3, f_4, f_5 (stated in the following tables) considering the several operational conditions:

$$P_1 \leq P_{tN} \cdot f_1 \cdot f_2 \cdot f_3 \cdot f_4 \cdot f_5$$

When the power applied is not constant and when the exact load cycle is given, it is possible, or advisable, to calculate the equivalent power applied, according to the formula:

$$P_{1eq} = \frac{1}{\eta} \cdot \sqrt[3]{\frac{P_{21}^3 \cdot t_1 + P_{22}^3 \cdot t_2 + \dots + P_{2n}^3 \cdot t_n}{t_c}}$$

where:

η is the efficiency of gearmotor (see ch.3);

P_{2i} [hp] is the power, referred to the gearmotor output, required in the time interval t_i [s];

$t_c = t_1 + t_2 + \dots + t_i + \dots + t_n$ is the total duration of load cycle [s].

In these cases choose factor f_2 from the continuous duty column S1.

Whenever the thermal verification should not be satisfied, in spite the prearrangement of cooling system, it is possible to install an **independent cooling unit with heat exchanger** (see ch. 4); consult us.

Thermal power needs not be taken into account when maximum duration of continuous running time is 1 ÷ 3 h (from small to large gear reducer sizes) followed by rest periods long enough to restore the gear reducer to near ambient temperature (likewise 1 ÷ 3 h).

In case of maximum ambient temperature above 122 °F (50 °C) or below 32 °F (0 °C) consult us.

Thermal factor $f_1 (= f_{1a} \cdot f_{1b})$ according to **cooling system** and **input speed n_1**

Cooling system				f_{1a}, f_{1b} input speed n_1 [rpm] $\geq$				
				710	900	1 120	1 400	1 800
f_{1a}	Natural convection	train of gears	2I, CI 3I, C2I	1.4 1.12	1.32 1.12	1.25 1.09	1.18 1.06	1 1
f_{1b}	Fan cooling ^{3) 4) 6)}	with 1 radial fan (bevel helical gear unit)		1.25	1.4	1.6	1.8 ⁵⁾	2
	With water coil ⁴⁾			see ch. 4				
	With internal exchanger ⁴⁾							

1) Corresponding to a mean temperature of the housing external surface approx. equal to 185 °F (85 °C) (locally this temperature may also reach the oil one).

2) For bevel helical gearmotors with double extension high speed shaft multiply P_{tN} by **0.85**.

3) With simultaneous water cooling by coil, values are multiplied by 1.8.

4) Refer to ch. 4 about positions, overall dimensions and design verification.

5) Value valid also for proper electric fan (installation by Customer).

6) With axial fan, the values are to be multiplied by 1.12. Consult us.

Thermal factor f_2 according to **ambient temperature** and **service**

Maximum ambient temperature °F (°C)	f_2				
	Continuous duty	Intermittent duty S3 ... S6			
		Cyclic duration factor [%] for 60 min running ¹⁾			
	S1	60	40	25	15
122 (50)	0.6	0.71	0.8	0.95	1
104 (40)	0.75	0.9	1	1.12	1.25
86 (30)	0.9	1.06	1.18	1.32	1.5
68 (20)	1	1.18	1.32	1.5	1.7
50 (10)	1.12	1.32	1.5	1.7	1.9

Thermal factor f_4 according to **installation altitude**

Altitude a.s.l.	f_4
ft	
≤ 3 300	1
3 300 – 6 600	0.95
6 600 – 9 800	0.9
9 800 – 13 100	0.85
> 13 100	0.8

Thermal factor f_3 according to **mounting position** (see also ch. 3.7 and 3.9); where it is not specified $f_3 = 1$

Train of gears	Mounting position	f_3								
		140	160	180	200	225	250	280	320, 321	360
MR 2I	B6 $i_N \leq 14$ $i_N \geq 16$	1 1	1 1	1 1	0.85 1	0.85 1	0.85 1	0.85 1	0.85 0.85	0.85 0.85
	B7 $i_N \leq 14$ $i_N \geq 16$	1 1	0.71 1	0.71 1	0.71 1	0.71 1	0.71 0.71	0.71 0.71	0.71 0.71	0.71 0.71
	V5 $i_N \leq 14$ $i_N \geq 16$	1 1	1 1	1 1	0.71 1	0.71 1	0.71 1	0.71 1	0.71 0.71	0.71 0.71
	V6 $i_N \leq 14$	1	1	1	1	1	1	1	0.85 ²⁾	0.85 ²⁾
MR 3I	B6 $i_N \leq 63$	1	1	1	1	1	0.85	0.85	0.85	0.85
	B7 $i_N \leq 63$ $i_N \geq 71$	1 1	1 1	1 1	0.71 1	0.71 1	0.71 1	0.71 1	0.71 0.71	0.71 0.71
	V5 $i_N \leq 63$	1	1	1	1	1	1	1	0.71	0.71
	V6 $i_N \leq 63$	1	1	1	1	1	0.85	0.85	0.85	0.85
MR CI	B7	1	1	1	1	1	0.85	0.85	–	–
	B8	0.85	1	0.85	1	0.85	1	0.85	–	–
	V5, V6 • above	1	1	1	1	1	0.85	0.85	–	–
MR C2I	B7	1	1	1	1	1	1	1	0.85	0.85


Thermal factor f_5 as dependent on air speed on the housing

Air speed ft/s	Working environment	f_5
< 2	very small no air movement gear reducer shielded	Consult us
2	small and with limited air movement	0.71
3.15	large and without ventilation	0.90
4	large and with slight ventilation (e.g. gearmotor with self-cooled motor)	1.00
8	outdoor ventilated	1.18
12.5	strong air movement	1.32

1) (Duration of running on load [min] / 60) · 100 [%].

2) For MR 2I, $f_3 = 1$.

• Position of reference groove (see ch. 6).

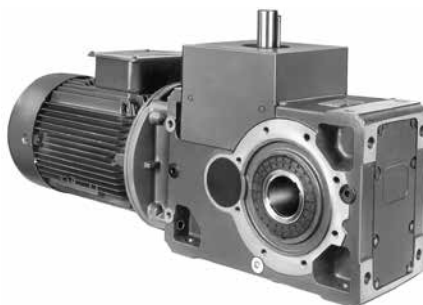

Fan cooling for bevel helical gearmotors.

With double extension high speed shaft designs, (... **D**, ... **H** and ... **R**) only one extensions is **accessible** even with fan fitted: **personal safety-guards are the Buyer's responsibility (2006/42/EC)**.

Preliminary considerations

Motor power

Taking into account the efficiency of the gearmotor, and other drives – if any – motor power is to be as near as possible to the power rating required by the driven machine: accurate calculation is therefore recommended.

The power required by the machine can be calculated, seeing that it is related directly to the power-requirement of the work to be carried out, to friction (starting, sliding or rolling friction) and inertia (particularly when mass and/or acceleration or deceleration are considerable). It can also be determined experimentally on the basis of tests, comparisons with existing applications, or readings taken with amperometers or wattmeters.

An oversized motor would involve: a greater starting current and consequently larger fuses and heavier cable; a higher running cost as power factor ($\cos \varphi$) and efficiency would suffer; greater stress on the drive, causing danger of mechanical failure, drive being normally proportionate to the power rating required by the machine, not to motor power.

In such cases, a detailed description of duty requirement must be made available: duration and frequency per hour of work cycle, acceleration and deceleration requirements if any, inertia, loads deriving from friction and work. In the absence of such data it is essential to provide all details which will permit their determination.

Only high values of ambient temperature, altitude, frequency of starting or other particular conditions require an increase in motor power.

Gearmotor

Determining the gearmotors size

- Fill in the selection questionnaire in all its parts at page 28; in particular, make available the necessary data: power P_2 required at gearmotor output, angular speed n_2 , running conditions (nature of load, duration, frequency of starting z , other considerations), referring to ch. 3.
- Determine service factor f_s on the basis of running conditions (ch. 3).
- Select the gearmotor size on the basis of n_2 , f_s and of a power P_1 greater than or equal P_2 (ch. 3.6 and 3.8). If power P_2 required is the result of a precise calculation, the gearmotor should be selected on the basis of a power P_1 equal to or greater than P_2 / η , where $\eta = 0.96 - 0.92$ is gearmotor efficiency (ch. 3.5). The torque value T_2 stated in the tables (ch. 3.6 and 3.8) has been calculated taking into account efficiency.

When for reasons of motor standardization, power P_1 available in catalog is much greater than the power P_2 required, the gearmotor can be selected on the basis of a lower service factor ($f_s \cdot P_2 / P_1$) provided it is certain that this excess power available will never be required and frequency of starting z is low enough not to affect service factor (ch. 3).

Calculations can also be made on the basis of torque instead of power; this method is even preferable for low n_2 values.

Verifications

- Verify possible radial load F_{r2} and axial load F_{a2} referring to directions and values given in ch. 3.10.
- For the motor, verify frequency of starting z when higher than that normally permissible; this will normally be required for brake motors only.
- Verify that the **static bending moment T_b** generated by motor weight on the counter flange of gear reducer is lower than the value allowed T_{bmax} , stated in the ch. 3.5.
Loads higher than permissible loads may be present in dynamical applications where the gearmotor is subjected to translations, rotations or oscillations: consult us for the study of every specific case
- When a load chart is available, and/or there are overloads – due to starting on full load (especially with high inertias and low transmission ratios), braking, shocks, gear reducers in which the low speed shaft becomes driving member due to driven machine inertia, or other static or dynamic causes - verify that the maximum torque peak (ch. 3.5 is always less than $1.6 \cdot T_{N2}$ ($T_{N2} = T_2 \cdot f_s$, see ch. 3.6 and 3.8); if it is higher or cannot be evaluated in the above cases, install a safety device so that **$1.6 \cdot T_{N2}$ will never be exceeded**.
- Verify, usually for $P_1 \geq 40$ hp, possible need for forced cooling (ch. 4).

Questionnaire for the selection

For the collection of data and of all information necessary for a correct selection of gearmotor, fill in the questionnaire at the following page.

Attach technical specifications, if any, concerning the gearmotor excluding other parts of the machine or of the plant. When it is possible, attach the questionnaire with drawings, pictures and any further information useful to facilitate the best selection from a technical and economic point of view.

1 Conditions of application

Area of application/Industry sector

Type of machine to be driven

- ☐ new machine
☐ existing and running machine
☐ gear reducer in use

Ambient temperature [°F]

min normal max

Altitude [m a.s.l.]

Ambient:

- ☐ normal (industrial) indoor
☐ normal (industrial) outdoor
☐ dusty
☐ corrosive / humid

Gear reducer position:

- ☐ tight space with insufficient air recycle
($v_{air} < 2$ ft/s)
☐ wide space with free air recycle
($v_{air} \geq 4$ ft/s)
☐ outdoor, protected against extremes of weather and radiation

2 Data of load

Output speed required [rpm]

min nominal max

Output torque required [lb in]

min nominal max

Power required on low speed shaft [hp]

min nominal max

Input speed (gear reducers) [rpm]

min nominal max

Nature of load:

- ☐ uniform
☐ moderate overloads
☐ heavy overloads

Frequency of starting [starts/h]

Moment of inertia of machine [lb ft²]

min normal max

Running time [h/d]

Total duration [h]

Duty cycle (S1 ... S10)

Load cycle attached

- ☐ yes
☐ no

3 Motor

Motor type:

- ☐ asynchronous three-phase (a.c.)
☐ asynchronous three-phase + inverter
☐ d.c. + converter
☐ internal combust. (one - cylinder)
☐ internal combust. (multi-cylinder)

Power P_1 [hp]

min nominal max

Nominal speed n_1 [rpm]

min nominal max

A.c. motor supply:

voltage [V] frequency [Hz]

NEMA motor size (a.c. motor)

A.c. motor connection:

- ☐ direct
☐ Y / Δ
☐ soft starter / inverter

Electromagnetic brake

- ☐ parking
☐ working
☐ safety

Braking torque [lb in]

Starting torque [lb in]

Moment of inertia [lb ft²]

Electric motor design (a.c. and d.c.):

- ☐ with fan cooling
☐ with encoder:
☐ with tachometer generator

Connection with gear reducer:

- ☐ with coupling
☐ with V-belt

section No. d_a [in] d_i [in]

☐ with toothed belt
section No. d_a [in]

Eventual limitation of drive overall dimensions

4 Gear reducer

Mounting position

Output shaft direction of rotation

- ☐ white arrow
☐ black arrow
☐ black and white arrow

Backstop device (if any)

- ☐ white arrow free rotation
☐ black arrow free rotation

Type of cooling admitted

- ☐ fan cooling
☐ coil
☐ internal heat exchanger
☐ unit UR O/A
☐ unit UR O/W

Type of connection to machine

- ☐ shaft mounting
☐ flexible / semi-flexible coupling
☐ universal coupling
☐ timing belt

pitch d_m d_1 φ


☐ chain
pitch No. z_2 z_3 overhang [in] φ

☐ straight tooth helical gear pair
pitch No. z_2 z_3 overhang [in] φ

Eventual axial load F_a [lb]

← — — — — — →

Eventual reduction of drive overall dimensions

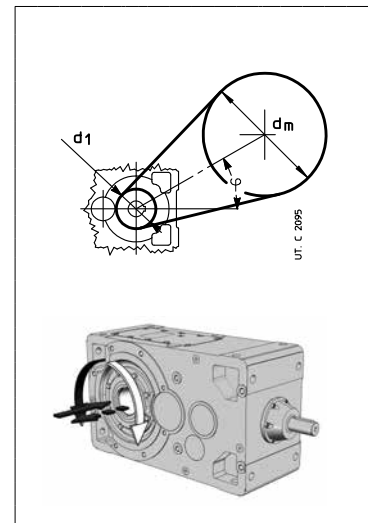

Sound levels L_{WA} and $\bar{L}_{pA}$

Standard production sound power level L_{WA} [dB(A)]¹⁾ and mean sound pressure level $\bar{L}_{pA}$ [dB(A)]²⁾ assuming nominal load, and input speed $n_1 = 1\ 800$ ³⁾ rpm. Tolerance +3 dB(A).

Gear reducer size	2I				3I				CI				C2I			
	$i_N \leq 14$		$i_N \geq 16$		$i_N \leq 90$		$i_N \geq 100$		$i_N \leq 18$		$i_N \geq 20$		$i_N \leq 71$		$i_N \geq 80$	
	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$	L_{WA}	$\bar{L}_{pA}$
125, 140	89	79	86	76	85	75	82	72	87	78	82	73	84	74	81	71
160, 180	92	81	89	78	88	77	85	74	90	81	85	76	86	76	84	73
200, 225	95	84	92	81	91	80	88	77	94	84	89	79	89	78	86	75
250, 280	98	87	95	84	94	83	91	80	96	86	91	81	92	81	90	78
320 ... 360	102	91	99	88	98	87	95	84					95	84	93	82

1) To ISO/CD 8579.

2) Mean value of measurement at 1 m from external profile of gear reducer standing in free field on a reflecting surface.

3) For n_1 710 – 1 400 rpm, modify tabulated values: thus $n_1 = 710$ rpm, -5 dB(A); $n_1 = 900$ rpm, -4 dB(A); $n_1 = 1\ 120$ min⁻¹, -3 dB(A); $n_1 = 1\ 400$ rpm, -2 dB(A).

If required, gearmotors can be supplied with reduced sound levels (normally 3 dB(A) less than tabulated values): consult us.

In case of gearmotors with fan cooling, add to the values in the table 3 dB(A) for 1 fan.

Efficiency

The efficiency stated in the table is indicative and referred to nominal running conditions (torque, speed, temperature); it is necessary to keep in mind that the efficiency value can diminish considerably for values of $T_2 \ll T_{N2}$

Model	Nominal efficiency η	
	2I, CI	3I, C2I
2	0.96	0.94
4	0.95	0.935

Overloads

When a gearmotor is subjected to high static and dynamic overloads, the need arises for verifying that such overloads will always remain lower than $1.6 \cdot T_{N2}$ (see ch. 3.6 and 3.8 where $T_{N2} = T_2 \cdot fs$).

Overloads are normally generated when one has:

- starting on full load (especially for high inertias and low transmission ratios), braking, shocks;
- gearmotors in which the low speed shaft becomes driving member due to driven machine inertia;
- applied power higher than that required; other static or dynamic causes;

The following general observations on overloads are accompanied by some formulas for carrying out evaluations in certain typical instances.

Where no evaluation is possible, install safety devices which will keep values within $1.6 \cdot T_{N2}$.

Starting torque

When starting on full load (especially for high inertias and low transmission ratios) verify that $1.6 \cdot T_{N2}$ is equal to or greater than starting torque, by using the following formula:

$$T_{2 \text{ start}} = \left(\frac{T_{\text{start}}}{T_N} \cdot T_2 \text{ available} - T_2 \text{ required} \right) \frac{WK_R^2}{WK_R^2 + WK_0^2} + T_2 \text{ required}$$

where:

T_2 required is the torque absorbed by the machine through work and frictions;

T_2 available is the output torque due to motor nominal power;

WK_0^2 is the moment of inertia (of mass) of the motor;

WK_R^2 is the external moment of inertia (of mass); gear reducers, couplings, driven machine referred to the motor shaft;

NOTE: when seeking to verify that starting torque is sufficiently high for starting, take into account starting friction, if any, in evaluating T_2 required.

Stopping machines with high kinetic energy (high moments of inertia combined with high speeds) with brake motor

Verify braking stress by means of the formula:

$$\left(\frac{T_{\text{brake}}}{\eta} \cdot i + T_2 \text{ required} \right) \frac{WK_R^2}{WK_R^2 + WK_0^2} - T_2 \text{ required} < 1.6 \cdot T_{N2}$$

where:

T_{brake} is the braking torque setting; for other symbols see above and ch. 2.

Operation with brake motor

Starting time t_a and revolutions of motor φa_1

$$t_a = \frac{(WK_0^2 + WK_R^2) \cdot n_1}{25.603 \left(T_{\text{start}} - \frac{T_2 \text{ required}}{i} \right)} \text{ [s];} \quad \varphi a_1 = \frac{t_a \cdot n_1}{19.1} \text{ [rad]}$$

Braking time t_b and revolutions of motor φb_1

$$t_b = \frac{(WK_0^2 + WK_R^2) \cdot n_1}{25.603 \left(T_{\text{brake}} + \frac{T_2 \text{ required}}{i} \right)} \text{ [s];} \quad \varphi b_1 = \frac{t_b \cdot n_1}{19.1} \text{ [rad]}$$

where:

T_{start} [lb in] is motor starting torque $\left(\frac{9550 \cdot P_1}{n_1} \cdot \frac{T_{\text{start}}}{M_N} \right)$;

T_f [lb in] is the braking torque setting of the motor;

for other symbols see above and ch. 2.

Assuming a regular air-gap and ambient humidity, and utilizing suitable electrical equipment, repetition of the braking action, as affected by variation in temperature of the brake and by the state of wear of friction surface, is approx $\pm 0.1 \cdot \varphi b_1$.

Angular backlash and torsional stiffness

A rough guide for the angular backlash (high speed shaft being locked) is given in the table. It varies according to temperature and transmission ratio.

Also the **approx.** values for low speed shaft torsional stiffness – high speed shaft being locked – are given in the table according to the train of gears.

The values stated in the table, since necessarily estimated, are to be considered valid for long model too. On request, gear reducers with **reduced backlash** lower than or equal to the minimum table values are available.

Gear reducer size	Angular backlash ¹⁾				Torsional stiffness ²⁾	
	[rad]		[arcmin]		[lb in / arcmin]	
	min	max	min	max	2I, CI	3I, C2I
125	0.0017	0.0034	5.8	12	1 250	–
140	0.0017	0.0034	5.8	12	1 750	1 000
160	0.0016	0.0032	5.5	11	2 500	1 400
180	0.0016	0.0032	5.5	11	3 550	2 000
200	0.0015	0.0030	5.2	10	5 000	2 800
225	0.0015	0.0030	5.2	10	7 100	4 000
250	0.0014	0.0028	4.8	9.6	10 000	5 600
280	0.0014	0.0028	4.8	9.6	14 000	8 000
320, 321	0.0013	0.0026	4.5	8.9	20 000	11 200
360	0.0013	0.0026	4.5	8.9	28 000	16 000

1) 1 rad = 3438'.

2) Values valid in condition of nominal load.


Moment of inertia (of mass) WK_i [lb ft²]

Train of gears	Gear reducer size									
i_N	125	140	160	180	200	225	250	280	320, 321	360
2I										
6,3 ... 12,5	–	0.074	0.216	0.242	0.694	0.772	2.121	2.344	6.679	7.501
6,3 ... 12,5 ¹⁾	–	0.107	0.316	0.342	1.021	1.100	3.038	3.261	9.423	10.245
14 ... 28	–	0.040	0.109	0.131	0.359	0.439	1.230	1.344	3.439	4.150
14 ... 28 ¹⁾	–	0.059	0.159	0.204	0.513	0.594	1.684	1.798	4.705	6.069
3I										
28 ... 63	–	–	0.045	0.048	0.143	0.150	0.430	0.451	1.423	1.276
28 ... 63 ¹⁾	–	–	0.055	0.057	0.176	0.183	0.523	0.544	1.698	1.368
71 ... 160	–	–	0.021	0.021	0.064	0.067	0.197	0.202	0.641	0.589
71 ... 160 ¹⁾	–	–	0.024	0.024	0.074	0.074	0.221	0.226	0.720	0.613
CI										
4 ... 8	0.090	0.100	0.292	0.325	0.876	0.983	2.596	3.043	–	–
9 ... 11,2	0.059	0.078	0.171	0.249	0.530	0.762	1.677	2.378	–	–
12,5 ... 16	0.036	0.043	0.121	0.145	0.375	0.444	1.192	1.399	–	–
18, 20	0.019	0.024	0.069	0.083	0.202	0.242	0.663	0.779	–	–
25 ... 31,5	–	–	0.038	–	0.112	–	0.375	–	–	–
C2I										
20 ... 31,5	–	–	0.093	0.100	0.297	0.316	0.891	0.945	2.686	2.884
35,5 ... 63	–	–	0.040	0.043	0.131	0.138	0.409	0.425	1.302	1.363
71 ... 100	–	–	0.017	0.017	0.059	0.062	0.176	0.181	0.570	0.589
125, 160	–	–	0.010	0.010	0.031	0.031	0.090	0.093	0.316	0.323

1) Values valid for long model.

Opposite side to motor input face

MR 2I 140 ... 360
MR 3I 140 ... 360
MR CI 125 ... 280
MR C2I 140 ... 360

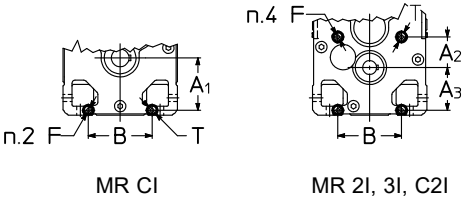


Gear reducer size		A ₁	A ₂	A ₃	B	F Ø 1)	T
CI	2I, 3I, C2I						
125, 140	140	138	81	113	162	M 12	25
160, 180	160, 180	165	96	135	201	M 16	32
200, 225	200, 225	207	115	162	250	M 20	40
250, 280	250, 280	258	143	203	310	M 24	48
	320 ... 360		180	252	386	M 30	

1) Working length of thread 1.25 · F.

High speed second shaft end (metric)

It is recommended that the holes of parts keyed onto high speed second (metric) shaft ends should be machined to ISO H7 tolerance. Before mounting, clean carefully and lubricate mating surfaces against seizure and fretting corrosion. Installing and removal operations should be carried out with **pullers** and **jacking screws** using the tapped hole at the shaft butt-end.

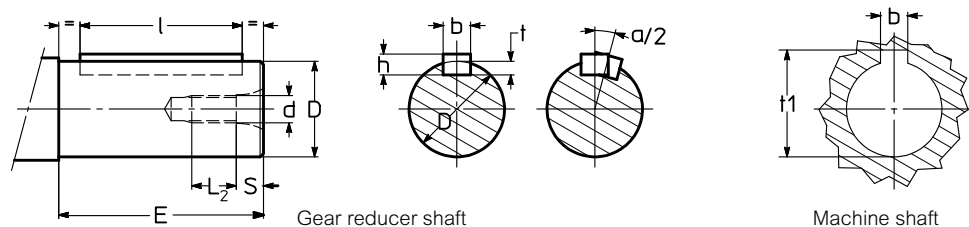

UTC 2099

Shaft end						Key		Keyway	
Ø D	E ¹⁾	d Ø	S	L ₂ ¹⁾	α/2 ²⁾ arc min	b × h × l ¹⁾ h9 h11	b H9 hub N9 shaft	t shaft	t ₁ hub
19 j 6	40	M 6	4.6	11.4	5.43	6 × 6 × 36	6	3.5	21.8
24 j 6	50	M 8	5.9	15.1	5.16	8 × 7 × 45	8	4	27.2
28 j 6	60	M 8	5.9	15.1	—	8 × 7 × 45	8	4	31.2
32 k 6	80	M 10	7.6	18.4	3.87	10 × 8 × 70	10	5	35.3
38 k 6	80	M 10	7.6	18.4	3.27	10 × 8 × 70	10	5	41.3
48 k 6	110	M 12	9.5	22.5	3.08	14 × 9 × 90	14	5.5	51.8
55 m 6	110	M 12	9.5	22.5	—	16 × 10 × 90	16	6	59.3
60 m 6	140	M 16	12.7	27.3	2.55	20 × 12 × 125	20	7.5	74.9

1) Values in brackets are for short shaft end.

2) Maximum angular misalignment between double extension shaft keys.

Hollow low speed shaft (imperial)


Gearmotors are equipped with hollow low speed shaft with inch diameter as standard; unlike the metric hollow low speed shaft the retaining ring grooves are not present with this design.

«Hollow low speed shaft washer» and «Hollow low speed shaft washer with locking rings or bushing» not available.

Dimensions of machine shaft end on which the gear reducer hollow shaft is to be keyed are those recommended in the table and shown in the figures below.

The suggested machine shaft D tolerance is valid for uniform load or moderate overloads without load reversals; otherwise a different fit should be taken into account; consult us.

Important: the shoulder diameter of the driven machine shaft end abutting with the gear reducer must be at least (1.18 – 1.25) D.

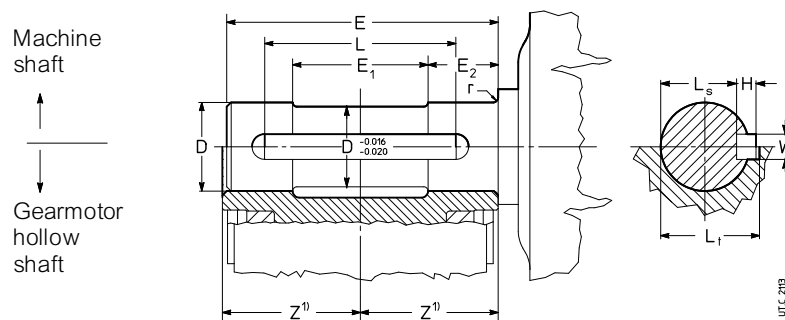

UTC 210

Gear reducer size	Hollow shaft			Machine shaft				Key ²⁾			Keyway ²⁾				
	D			D Tolerance	E	E ₁	E ₂	r	W	H	L	W	Ls	Lt	
					in	in	in	in	in	in	in	in	in	in	in
125	2.375	2 3/8	+0.0015 -0.0000	+0.0000 -0.0010	8.58	4.33	2.17	0.08	0.625 +0.0000 -0.0030	0.4375 +0.0000 -0.0030	5.5	0.625 +0.0030 -0.0000	2.114	2.557	
140	2.75	2 3/4	+0.0015 -0.0000	+0.0000 -0.0010	9.76	4.88	2.48	0.08	0.625 +0.0000 -0.0030	0.4375 +0.0000 -0.0030	7	0.625 +0.0030 -0.0000	2.495	2.938	
160	3.25	3 1/4	+0.0015 -0.0000	+0.0000 -0.0010	10.6	5.35	2.68	0.12	0.75 +0.0000 -0.0030	0.461* +0.0000 -0.0030	8	0.75 +0.0030 -0.0000	2.956	3.422*	
180	3.625	3 5/8	+0.0015 -0.0000	+0.0000 -0.0010	11.7	5.91	2.95	0.12	0.875 +0.0000 -0.0040	0.586* +0.0000 -0.0040	8	0.875 +0.0030 -0.0000	3.259	3.850*	
200	4	4	+0.0015 -0.0000	+0.0000 -0.0010	13.0	6.85	3.15	0.12	1 +0.0000 -0.0040	0.671* +0.0000 -0.0040	10	1 +0.0030 -0.0000	3.561	4.237*	
225	4.25	4 1/4	+0.0015 -0.0000	+0.0000 -0.0010	14.0	7.09	3.54	0.14	1 +0.0000 -0.0040	0.711* +0.0000 -0.0040	10	1 +0.0030 -0.0000	3.815	4.531*	
250	5	5	+0.0015 -0.0000	+0.0000 -0.0010	16.1	8.35	3.94	0.16	1.25 +0.0000 -0.0040	0.777* +0.0000 -0.0040	12.5	1.25 +0.0040 -0.0000	4.483	5.265*	
280	5.5	5 1/2	+0.0015 -0.0000	+0.0000 -0.0010	17.3	8.66	4.41	0.16	1.25 +0.0000 -0.0040	0.875* +0.0000 -0.0040	12.5	1.25 +0.0040 -0.0000	4.991	5.871*	
320, 321	6.25	6 1/4	+0.0015 -0.0000	+0.0000 -0.0010	19.8	10.16	4.92	0.20	1.5 +0.0000 -0.0040	0.882* +0.0000 -0.0040	16	1.5 +0.0040 -0.0000	5.659	6.546*	
360	7	7	+0.0015 -0.0000	+0.0000 -0.0010	21.3	10.71	5.39	0.20	1.5 +0.0000 -0.0050	1.500* +0.0000 -0.0050	16	1.75 +0.0040 -0.0000	6.139	7.644*	


1) For Z dimension refer to ch. 3.7 and 3.9.

2) According to ANSI B17.1 except for cases marked with * for which, due to the out-of-standard Lt dimension, a suitable modified key is supplied

3) Tolerance +0.000/-0.015.

Reference groove


The reference for identification of the hollow low speed shaft side opposite to which it is advisable to apply the radial load, is provided by a groove as shown in the drawing below. The position of the reference groove is identified by the symbol ● in the drawings «Design» of ch. 3.7 and 3.9.

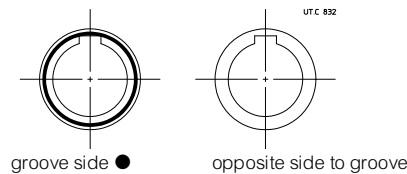

Plug dimensions

Gearmotor size	125 ... 280	160 ... 280	320 ... 360
Size threaded holes	G 1/2"	G 3/4"	G 1"
Tightening torque lb in	124	124	220


Expansion tank (sizes 125 ... 360)



Gear reducer size	A	B	F	Plug
125 ... 140	131	46	G1/2"	1/2"
160 ... 280	205	80	G3/4"	3/4"
320 ... 360	230	102	G1"	1"


Cap overall dimension

For MR 21 140, the cap opposite to this overhung of 4 mm from H1 dimension (ref. chap. 3.7 and 3.9) due to backstop device pre-arrangement (X = Ø72 mm).



Fastening tapped holes (sizes 125 ... 321)


The relevant through holes to be realized on the driven machine must be all of equal diameter for sizes 140, 200 and 250 ($\varnothing 15$, $\varnothing 21$ and $\varnothing 25$, respectively) as the 2 holes of smaller diameter are not in the position of $22^\circ 30'$.

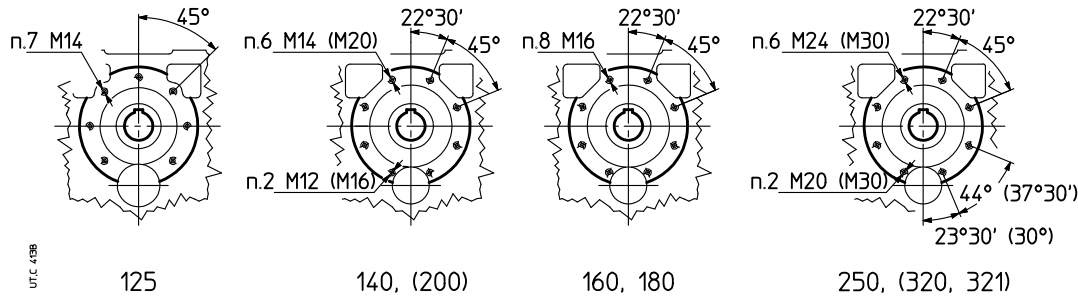


Directions of rotation

The correspondence between the high speed shaft and low speed shaft is stated at ch. 3.7 and 3.9 according to design and train of gears. For the interpretation of arrows, refer to the following 3D sketches.

Bevel helical gearmotor MR C2I UO2A

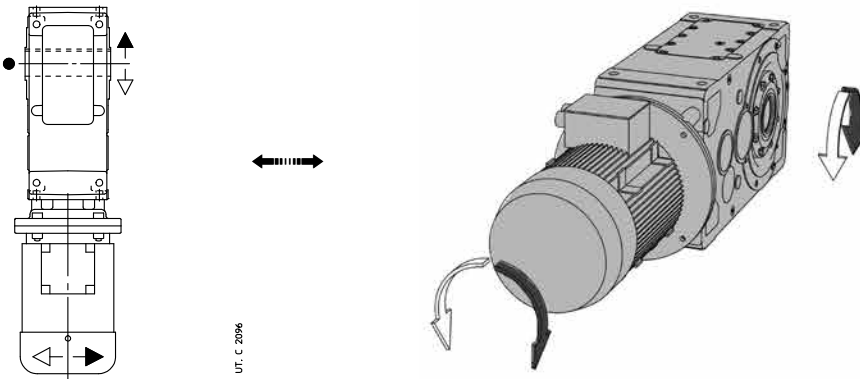

Bearing and/or gear pair forced lubrication: hydraulic circuit diagram

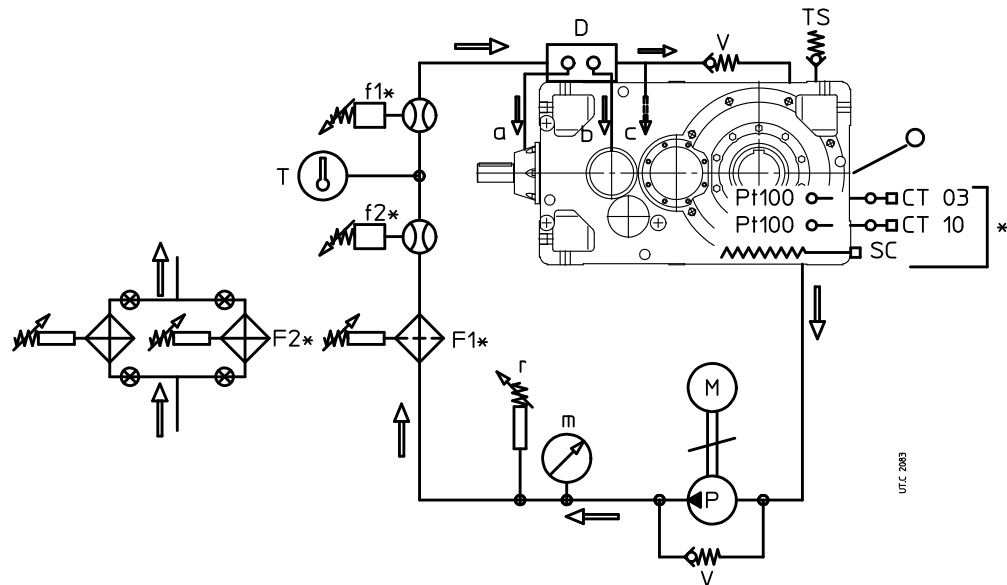

Standard

a, b, c	Gear pair/bearing pipes
m	Pressure gauge (0 – 230 psi)
M	Motor pump
P	Pump
T	Thermometer
V	Safety valve
r	Minimum pressure gauge
TS	Filler plug
D	Distributor
	Oil level (approximate)

On request

Pt 100*	Oil temperature probe (loose)*
f1	Electric flow switch: vertical mounting
f2	Visible flow switch
F1	Filter
F2	Exchange filters
CT03*, CT10*	Signalling device (loose)*
SC*	Heater


* On request, but necessary for gear reducer starting with $T_{\text{ambient}} (= T_{\text{oil}}) \leq 77^{\circ}\text{F}$ (25°C): preheat the oil with the heater.

NOTES: The bearings and/or the gear pairs to be forced lubricated are defined by Rossi according to gear reducer and application.

CT03: set the operating threshold at 122°F (50°C) (stopping the heater supply) and the reset threshold at 86°F (30°C).


CT10: set the operating threshold at 86°F (30°C) to start gear reducer and motor pump; set the reset threshold at 50°F (10°C) and the safety threshold at 194°F (90°C).

For the gear reducer starting at $T_{\text{ambient}} (= T_{\text{oil}}) \leq 32^{\circ}\text{F}$ (0°C) the same logic is valid, but the devices CT03 and CT10 must be set according to the real ambient temperature.

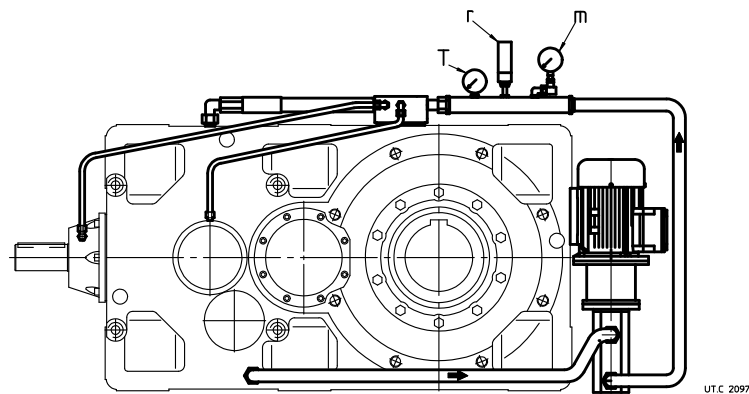

Sketch of forced lubrication with motor pump: the exact position of motor pump depends on the gear reducer size, train of gears, mounting position and available overall dimensions: for this reason, on request, a drawing of the specific solution will be supplied; the pipes will be realized with suction and delivery flexible pipes and with rigid pipes between the distributor and the bearings.

Bearing and/or gear pair forced lubrication with oil/air or oil/water independent cooling unit: hydraulic circuit diagram

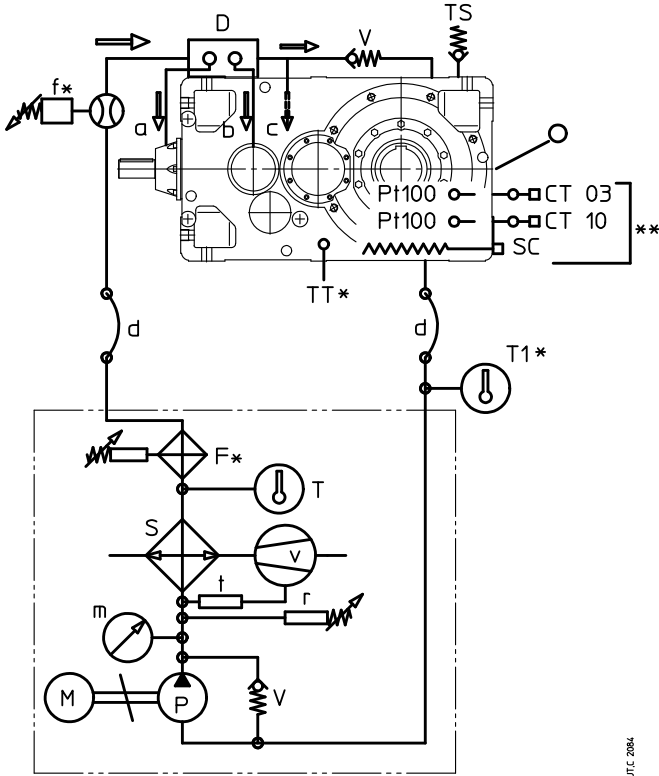

Standard

a, b, c	Gear pair/bearing pipes
d	Flexible connection (by Buyer)
m	Pressure gauge (0 – 230 psi)
M	Motor pump
P	Pump
S	Oil/air or oil/water exchanger
v	Motor fan (UR O/A...)
t	Fan thermostat 32 – 194 °F (0 – 90 °C) (UR O/A...)
T	Thermometer 32 – 248 °F (0 – 120 °C)
V	Safety valve
r	Minimum pressure gauge
TS	Filler plug
D	Distributor
	Oil level (approximate)

On request

Pt 100*	Oil temperature probe (loose)*
f	Flow switch (loose)
F	Filter with electric blockage warning (with UR O/A... loose)
CT03* CT10*	Signalling device (loose)*
T1	Thermometer 32 – 248 °F (0 – 120 °C)
TT	Bi-metal type thermometer
SC*	Heater


* On request but necessary for gear reducer starting with $T_{ambient} (= T_{oil}) \leq 77\text{ °F} (25\text{ °C})$: preheat the oil with heater.

NOTES: Bearings and/or gear pairs to be forced lubricated are defined by Rossi according to gear reducer and application.

CT03: set the operating threshold at 122 °F (50 °C), (stopping the heater supply) and the reset threshold at 86 °F (30 °C).

CT10: set the operating threshold at 86 °F (30 °C) to start gear reducer and motor pump; set the reset threshold at 50 °F (10 °C) and the safety threshold at 194 °F (90 °C).

For gear reducer starting with $T_{ambient} (= T_{oil}) \leq 32\text{ °F} (0\text{ °C})$ the same logic is valid, but the devices CT03 and CT10 must be set according to the real ambient temperature.

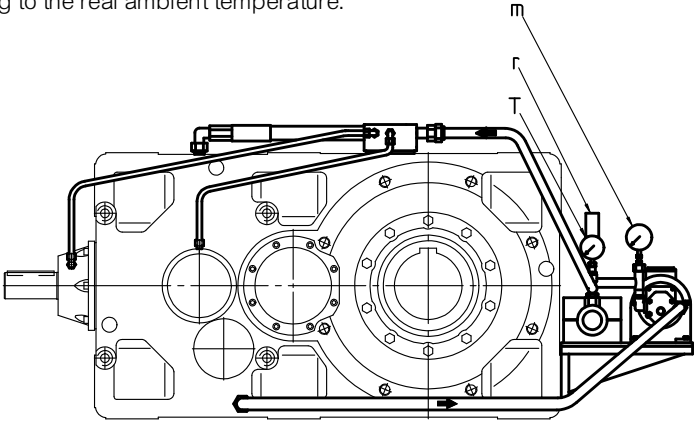

Sketch of forced lubrication with cooling unit the exact position of cooling unit depends on the gear reducer size, train of gears, mounting position and available overall dimensions: for this reason, on request, a drawing of the specific solution will be supplied; the pipes will be realized with suction and delivery flexible pipes and with rigid pipes between the distributor and the bearings.

Maximum bending moment of flange MR

Verify that the static bending moment M_b generated by motor weight on the counter flange of gear reducer is lower than the value allowed M_{bmax} stated in the table:

$$M_b \leq M_{bmax}$$

where:

$$M_b = G \cdot (X + HF) / 1000 \text{ [lb in]}$$


G [lb] motor weight

X [in] distance from motor center of gravity from flange surface

HF [in] supplied in the table, according to gear reducer size and NEMA motor frame

Very long and thin motors, though with bending moments within the prescribed limits, may generate anomalous vibrations during the operation. In these cases it is necessary to foresee a proper additional motor support (see motor specific documentation).

Loads higher than permissible loads may be present in dynamical applications where the gearmotor is subjected to translations, rotations or oscillations (e.g.: shaft mounting arrangements): consult us for the study of every specific case.

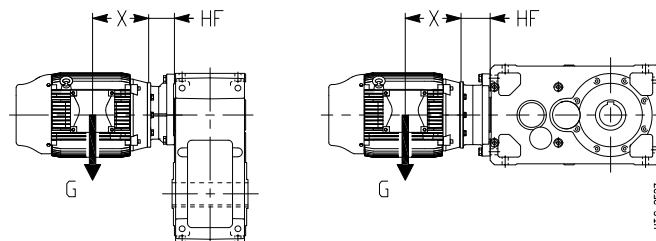

Bending moment M_{bmax} and dimension HF

	NEMA motor frame	21, 31		C1		C21	
		HF in	T_{bmax} lb in	HF in	T_{bmax} lb in	HF ¹⁾ in	T_{bmax} lb in
125	N210TC	—	—	3.47	5000	—	—
	N250TC	—	—	3.47	5000	—	—
	N280TC	—	—	4.1	8000	—	—
140	N180TC	3.66 ²⁾	5000	—	—	3.47 (3.66)	5000
	N210TC	3.66	5000	3.47	5000	3.47 (3.66)	5000
	N250TC	3.66 4.45 ²⁾	5000	3.47	5000	—	—
	N280TC	3.66	8000	4.1	8000	—	—
160, 180	N180TC	3.5 ²⁾	11200	—	—	3.47 (3.5)	11200
	N210TC	3.5 ²⁾	11200	—	—	3.47 (3.5)	11200
	N250TC	3.5	11200	3.5	11200	3.47 (3.5)	11200
	N280TC	4.1	11200	4.13	11200	4.1	11200
	N320TC	4.41 ³⁾	11200	4.76	11200	—	—
	N360TC	4.41 ³⁾	17500	—	—	—	—
200, 225	N210TC	4.1 ²⁾	22400	—	—	3.5 (4.1)	22400
	N250TC	4.1 ²⁾	22400	—	—	3.5 (4.1)	22400
	N280TC	4.1	22400	4.14	22400	4.14 (4.1)	22400
	N320TC	5	22400	4.76	22400	4.76 (5)	22400
	N360TC	5.71	22400	6.69	22400	—	—
	N400TC	5.71 ³⁾	35500	6.69	35500	—	—
250, 280	N250TC	4.33 ²⁾	63000	—	—	3.5 (4.33)	40000
	N280TC	4.33 ²⁾	63000	—	—	4.14 (4.33)	40000
	N320TC	5.91 ²⁾	63000	6.73	63000	6.69 (5.91)	40000
	N360TC	5.91	63000	6.73	63000	6.69 (5.91)	40000
	N400TC	5.91	63000	6.73	63000	6.69 (5.91)	40000
	N440TC	9.06	63000	8	63000	—	—
320, 360	N320TC	5.55 ²⁾	80000	—	—	6.73 (5.55)	80000
	N360TC	5.55 ²⁾	80000	—	—	6.73 (5.55)	80000
	N400TC	5.55 ²⁾	80000	—	—	6.73 (5.55)	80000
	N440TC	7.33	80000	—	—	7.99 (7.33)	80000

1) The values in bracket is valid for design UO2V, UO2Vsin, UO2R, UO2Rsin.

2) For MR 31, only.

3) For MR 21, only.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
1.5	9.38	9 480	3.75	MR 3I 140 - N180TC 182 TC	6 123
	11.5	7 730	5.6	MR 3I 140 - N180TC 182 TC	6 100
	12.9	6 900	6.3	MR 3I 140 - N180TC 182 TC	6 89.4
	14.1	6 290	6.7	MR 3I 140 - N180TC 182 TC	6 81.4
	15.1	5 870	5.6	MR 3I 140 - N180TC 182 TC	6 76.0
	15.8	5 620	8	MR 3I 140 - N180TC 182 TC	6 72.8
	18.6	4 790	8.5	MR 3I 140 - N180TC 182 TC	6 62.0
	20.8	4 280	10	MR 3I 140 - N180TC 182 TC	6 55.4
	22.8	3 900	10.6	MR 3I 140 - N180TC 182 TC	6 50.4
2	9.38	12 650	2.8	MR 3I 140 - N180TC 184 TC	6 123
	11.5	10 300	4.25	MR 3I 140 - N180TC 184 TC	6 100
	12.9	9 210	4.75	MR 3I 140 - N180TC 184 TC	6 89.4
	14.1	8 390	5	MR 3I 140 - N180TC 184 TC	6 81.4
	15.1	7 830	4.25	MR 3I 140 - N180TC 184 TC	6 76.0
	15.8	7 500	6	MR 3I 140 - N180TC 184 TC	6 72.8
	18.6	6 380	6.3	MR 3I 140 - N180TC 184 TC	6 62.0
	20.8	5 700	7.5	MR 3I 140 - N180TC 184 TC	6 55.4
	22.8	5 200	8	MR 3I 140 - N180TC 184 TC	6 50.4
	25.5	4 640	9	MR 3I 140 - N180TC 184 TC	6 45.1
	29.7	3 980	10.6	MR 3I 140 - N180TC 184 TC	6 38.7
3	9.38	18 950	1.9	MR 3I 140 - N210TC 213 TC	6 123
	9.02	19 700	2.8	MR 3I 160 - N210TC 213 TC	6 128
	8.75	20 300	4	MR 3I 180 - N210TC 213 TC	6 131
	11.5	15 450	2.8	MR 3I 140 - N210TC 213 TC	6 100
	10.7	16 550	4	MR 3I 160 - N210TC 213 TC	6 107
	12.9	13 800	3.15	MR 3I 140 - N210TC 213 TC	6 89.4
	14.3	12 450	2.65	MR 3I 140 - N180TC 182 TC	4 123
	13.7	12 950	4	MR 3I 160 - N180TC 182 TC	4 128
	15.8	11 250	4	MR 3I 140 - N210TC 213 TC	6 72.8
	17.5	10 150	4	MR 3I 140 - N180TC 182 TC	4 100
	19.6	9 080	4.75	MR 3I 140 - N180TC 182 TC	4 89.4
	21.5	8 270	5	MR 3I 140 - N180TC 182 TC	4 81.4
	23.0	7 720	4.25	MR 3I 140 - N180TC 182 TC	4 76.0
	24.1	7 390	5.6	MR 3I 140 - N180TC 182 TC	4 72.8
	28.2	6 290	6.3	MR 3I 140 - N180TC 182 TC	4 62.0
	31.6	5 620	7.5	MR 3I 140 - N180TC 182 TC	4 55.4
	34.7	5 120	8	MR 3I 140 - N180TC 182 TC	4 50.4
	38.8	4 580	9	MR 3I 140 - N180TC 182 TC	4 45.1
	45.3	3 930	10.6	MR 3I 140 - N180TC 182 TC	4 38.7
5	9.38	31 600	1.12	MR 3I 140 - N210TC 215 TC	6 123
	9.02	32 850	1.7	MR 3I 160 - N210TC 215 TC	6 128
	8.75	33 850	2.36	MR 3I 180 - N210TC 215 TC	6 131
	9.65	30 700	3.55	MR 3I 200 - N210TC 215 TC	6 119
	11.5	25 750	1.7	MR 3I 140 - N210TC 215 TC	6 100
	10.7	27 600	2.36	MR 3I 160 - N210TC 215 TC	6 107
	10.7	27 700	3.15	MR 3I 180 - N210TC 215 TC	6 108
	12.9	23 000	1.9	MR 3I 140 - N210TC 215 TC	6 89.4
	12.3	24 150	2.8	MR 3I 160 - N210TC 215 TC	6 93.7
	12.3	24 050	3.35	MR 3I 180 - N210TC 215 TC	6 93.3
	14.3	20 750	1.6	MR 3I 140 - N180TC 184 TC	4 123
	14.1	20 950	2	MR 3I 140 - N210TC 215 TC	6 81.4
	13.7	21 600	2.36	MR 3I 160 - N180TC 184 TC	4 128
	13.4	22 050	2.8	MR 3I 160 - N210TC 215 TC	6 85.7
	13.3	22 250	3.35	MR 3I 180 - N180TC 184 TC	4 131
	15.8	18 750	2.36	MR 3I 140 - N210TC 215 TC	6 72.8

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
5	17.5	16 950	2.36	MR 3I 140 - N180TC 184 TC	4 100
	18.6	15 950	2.5	MR 3I 140 - N210TC 215 TC	6 62.0
	16.3	18 150	3.35	MR 3I 160 - N180TC 184 TC	4 107
	19.6	15 150	2.8	MR 3I 140 - N180TC 184 TC	4 89.4
	20.8	14 250	3	MR 3I 140 - N210TC 215 TC	6 55.4
	18.7	15 850	4.25	MR 3I 160 - N180TC 184 TC	4 93.7
	21.5	13 800	3	MR 3I 140 - N180TC 184 TC	4 81.4
	24.1	12 300	3.35	MR 3I 140 - N180TC 184 TC	4 72.8
	28.2	10 500	3.75	MR 3I 140 - N180TC 184 TC	4 62.0
	31.6	9 370	4.5	MR 3I 140 - N180TC 184 TC	4 55.4
	34.7	8 540	4.75	MR 3I 140 - N180TC 184 TC	4 50.4
	38.8	7 630	5.6	MR 3I 140 - N180TC 184 TC	4 45.1
	45.3	6 540	6.3	MR 3I 140 - N180TC 184 TC	4 38.7
	46.6	6 350	6.3	MR 3I 140 - N180TC 184 TC	4 37.5
	54.4	5 450	6.7	MR 3I 140 - N180TC 184 TC	4 32.2
	60.2	4 920	6.7	MR 3I 140 - N180TC 184 TC	4 29.1
	76.4	3 960	9	MR 2I 140 - N210TC 215 TC	6 15.1
	78.2	3 870	9	MR 2I 140 - N210TC 215 TC	6 14.7
	86.3	3 500	10	MR 2I 140 - N210TC 215 TC	6 13.3
	96.6	3 130	11.8	MR 2I 140 - N210TC 215 TC	6 11.9
	113	2 690	12.5	MR 2I 140 - N210TC 215 TC	6 10.2
	125	2 430	12.5	MR 2I 140 - N210TC 215 TC	6 9.22
7.5	9.02	49 300	1.12	MR 3I 160 - N250TC 254 TC	6 128
	8.75	50 750	1.6	MR 3I 180 - N250TC 254 TC	6 131
	9.65	46 050	2.36	MR 3I 200 - N250TC 254 TC	6 119
	9.37	47 450	3.35	MR 3I 225 - N250TC 254 TC	6 123
	11.5	38 650	1.12	MR 3I 140 - N250TC 254 TC	6 100
	10.7	41 400	1.6	MR 3I 160 - N250TC 254 TC	6 107
	10.7	41 600	2.12	MR 3I 180 - N250TC 254 TC	6 108
	11.5	38 650	3.35	MR 3I 200 - N250TC 254 TC	6 100
	12.9	34 500	1.25	MR 3I 140 - N250TC 254 TC	6 89.4
	12.3	36 200	1.9	MR 3I 160 - N250TC 254 TC	6 93.7
	12.3	36 050	2.24	MR 3I 180 - N250TC 254 TC	6 93.3
	13.3	33 400	4	MR 3I 200 - N250TC 254 TC	6 86.4
	14.3	31 150	1.06	MR 3I 140 - N210TC 213 TC	4 123
	14.1	31 450	1.32	MR 3I 140 - N250TC 254 TC	6 81.4
	13.7	32 400	1.6	MR 3I 160 - N210TC 213 TC	4 128
	13.4	33 100	1.9	MR 3I 160 - N250TC 254 TC	6 85.7
	13.3	33 350	2.24	MR 3I 180 - N210TC 213 TC	4 131
	13.4	33 250	2.65	MR 3I 180 - N250TC 254 TC	6 86.1
	14.7	30 250	3.55	MR 3I 200 - N210TC 213 TC	4 119
	15.8	28 100	1.6	MR 3I 140 - N250TC 254 TC	6 72.8
	15.3	28 950	2.36	MR 3I 160 - N250TC 254 TC	6 74.9
	17.5	25 400	1.6	MR 3I 140 - N210TC 213 TC	4 100
	16.3	27 200	2.24	MR 3I 160 - N210TC 213 TC	4 107
	16.3	27 350	3	MR 3I 180 - N210TC 213 TC	4 108
	17.5	25 400	4.75	MR 3I 200 - N210TC 213 TC	4 100
	19.6	22 700	1.9	MR 3I 140 - N210TC 213 TC	4 89.4
	18.7	23 800	2.8	MR 3I 160 - N210TC 213 TC	4 93.7
	18.8	23 700	3.35	MR 3I 180 - N210TC 213 TC	4 93.3
	21.5	20 650	2	MR 3I 140 - N210TC 213 TC	4 81.4
	20.4	21 750	2.8	MR 3I 160 - N210TC 213 TC	4 85.7
	20.3	21 850	3.75	MR 3I 180 - N210TC 213 TC	4 86.1
	24.1	18 450	2.24	MR 3I 140 - N210TC 213 TC	4 72.8
	23.4	19 050	3.55	MR 3I 160 - N210TC 213 TC	4 74.9
	28.2	15 750	2.5	MR 3I 140 - N210TC 213 TC	4 62.0
	27.6	16 100	3.75	MR 3I 160 - N210TC 213 TC	4 63.5
	31.6	14 050	3	MR 3I 140 - N210TC 213 TC	4 55.4
	31.5	14 100	4.75	MR 3I 160 - N210TC 213 TC	4 55.5

1) Powers valid for continuous duty S1; **Increase possible** for duty cycles S2... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
2)					
7.5	34.7	12 800	3.15	MR 3I 140 - N210TC 213 TC	4 50.4
	38.8	11 450	3.75	MR 3I 140 - N210TC 213 TC	4 45.1
	45.3	9 820	4.25	MR 3I 140 - N210TC 213 TC	4 38.7
	46.6	9 530	4.25	MR 3I 140 - N210TC 213 TC	4 37.5
	54.4	8 170	4.25	MR 3I 140 - N210TC 213 TC	4 32.2
	60.2	7 390	4.25	MR 3I 140 - N210TC 213 TC	4 29.1
	72.6	6 250	4.75	MR 2I 140 - N210TC 213 TC	4 24.1
	80.7	5 620	6	MR 2I 140 - N210TC 213 TC	4 21.7
	89.1	5 090	6.7	MR 2I 140 - N210TC 213 TC	4 19.6
	99.7	4 550	8	MR 2I 140 - N210TC 213 TC	4 17.6
	116	3 900	9	MR 2I 140 - N210TC 213 TC	4 15.1
	119	3 810	9	MR 2I 140 - N210TC 213 TC	4 14.7
	131	3 450	10	MR 2I 140 - N210TC 213 TC	4 13.3
	147	3 090	11.2	MR 2I 140 - N210TC 213 TC	4 11.9
	171	2 650	12.5	MR 2I 140 - N210TC 213 TC	4 10.2
	190	2 390	12.5	MR 2I 140 - N210TC 213 TC	4 9.22
10	9.02	65 700	0.85	MR 3I 160 - N250TC 256 TC	6 128
	8.75	67 700	1.18	MR 3I 180 - N250TC 256 TC	6 131
	9.65	61 400	1.8	MR 3I 200 - N250TC 256 TC	6 119
	9.37	63 250	2.5	MR 3I 225 - N250TC 256 TC	6 123
	9.20	64 400	3.55	MR 3I 250 - N250TC 256 TC	6 125
	11.5	51 500	0.85	MR 3I 140 - N250TC 256 TC	6 100
	10.7	55 150	1.18	MR 3I 160 - N250TC 256 TC	6 107
	10.7	55 450	1.6	MR 3I 180 - N250TC 256 TC	6 108
	11.5	51 550	2.5	MR 3I 200 - N250TC 256 TC	6 100
	11.7	50 750	3.55	MR 3I 225 - N250TC 256 TC	6 98.5
	12.9	46 050	0.95	MR 3I 140 - N250TC 256 TC	6 89.4
	12.3	48 250	1.4	MR 3I 160 - N250TC 256 TC	6 93.7
	12.3	48 050	1.7	MR 3I 180 - N250TC 256 TC	6 93.3
	13.3	44 550	3.15	MR 3I 200 - N250TC 256 TC	6 86.4
	14.3	41 500	0.8	MR 3I 140 - N210TC 215 TC	4 123
	14.1	41 950	1	MR 3I 140 - N250TC 256 TC	6 81.4
	13.7	43 200	1.18	MR 3I 160 - N210TC 215 TC	4 128
	13.4	44 150	1.4	MR 3I 160 - N250TC 256 TC	6 85.7
	13.3	44 500	1.7	MR 3I 180 - N210TC 215 TC	4 131
	13.4	44 350	1.9	MR 3I 180 - N250TC 256 TC	6 86.1
	14.7	40 350	2.65	MR 3I 200 - N210TC 215 TC	4 119
	13.7	43 250	3	MR 3I 200 - N250TC 256 TC	6 84.0
	14.3	41 550	3.55	MR 3I 225 - N210TC 215 TC	4 123
	15.8	37 500	1.18	MR 3I 140 - N250TC 256 TC	6 72.8
	15.3	38 600	1.8	MR 3I 160 - N250TC 256 TC	6 74.9
	15.4	38 450	2.5	MR 3I 180 - N250TC 256 TC	6 74.6
	15.8	37 400	3.55	MR 3I 200 - N250TC 256 TC	6 72.6
	17.5	33 850	1.18	MR 3I 140 - N210TC 215 TC	4 100
	16.3	36 250	1.7	MR 3I 160 - N210TC 215 TC	4 107
	16.3	36 450	2.24	MR 3I 180 - N210TC 215 TC	4 108
	17.5	33 850	3.55	MR 3I 200 - N210TC 215 TC	4 100
	19.6	30 250	1.4	MR 3I 140 - N210TC 215 TC	4 89.4
	18.7	31 700	2.12	MR 3I 160 - N210TC 215 TC	4 93.7
	18.8	31 600	2.5	MR 3I 180 - N210TC 215 TC	4 93.3
	20.2	29 250	4.5	MR 3I 200 - N210TC 215 TC	4 86.4
	21.5	27 550	1.5	MR 3I 140 - N210TC 215 TC	4 81.4
	22.8	26 000	1.6	MR 3I 140 - N250TC 256 TC	6 50.4
	20.4	29 000	2.12	MR 3I 160 - N210TC 215 TC	4 85.7
	20.3	29 150	2.8	MR 3I 180 - N210TC 215 TC	4 86.1
	22.5	26 300	3.15	MR 3I 180 - N250TC 256 TC	6 51.0
	20.8	28 450	4.25	MR 3I 200 - N210TC 215 TC	4 84.0
	24.1	24 650	1.7	MR 3I 140 - N210TC 215 TC	4 72.8
	23.4	25 350	2.65	MR 3I 160 - N210TC 215 TC	4 74.9
	23.5	25 250	3.55	MR 3I 180 - N210TC 215 TC	4 74.6

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
2)					
10	28.2	20 950	1.9	MR 3I 140 - N210TC 215 TC	4 62.0
	27.6	21 500	2.8	MR 3I 160 - N210TC 215 TC	4 63.5
	27.4	21 600	3.75	MR 3I 180 - N210TC 215 TC	4 63.8
	31.6	18 750	2.24	MR 3I 140 - N210TC 215 TC	4 55.4
	31.5	18 800	3.55	MR 3I 160 - N210TC 215 TC	4 55.5
	34.7	17 100	2.36	MR 3I 140 - N210TC 215 TC	4 50.4
	34.5	17 200	3.55	MR 3I 160 - N210TC 215 TC	4 50.8
	38.8	15 250	2.8	MR 3I 140 - N210TC 215 TC	4 45.1
	47.7	12 650	2.5	MR 2I 140 - N250TC 256 TC	6 24.1
	45.3	13 100	3.15	MR 3I 140 - N210TC 215 TC	4 38.7
	53.0	11 400	3	MR 2I 140 - N250TC 256 TC	6 21.7
	46.6	12 700	3.15	MR 3I 140 - N210TC 215 TC	4 37.5
	54.4	10 900	3.35	MR 3I 140 - N210TC 215 TC	4 32.2
	60.2	9 850	3.35	MR 3I 140 - N210TC 215 TC	4 29.1
	72.6	8 330	3.55	MR 2I 140 - N210TC 215 TC	4 24.1
	80.7	7 500	4.5	MR 2I 140 - N210TC 215 TC	4 21.7
	89.1	6 790	5.3	MR 2I 140 - N210TC 215 TC	4 19.6
	99.7	6 070	6	MR 2I 140 - N210TC 215 TC	4 17.6
15	116	5 210	6.7	MR 2I 140 - N210TC 215 TC	4 15.1
	119	5 080	6.7	MR 2I 140 - N210TC 215 TC	4 14.7
	131	4 600	7.5	MR 2I 140 - N210TC 215 TC	4 13.3
	147	4 110	8.5	MR 2I 140 - N210TC 215 TC	4 11.9
	171	3 530	9.5	MR 2I 140 - N210TC 215 TC	4 10.2
	190	3 190	9.5	MR 2I 140 - N210TC 215 TC	4 9.22
15	8.75	101 500	0.8	MR 3I 180 - N280TC 284 TC	6 131
	9.65	92 100	1.18	MR 3I 200 - N280TC 284 TC	6 119
	9.37	94 850	1.7	MR 3I 225 - N280TC 284 TC	6 123
	9.20	96 550	2.36	MR 3I 250 - N280TC 284 TC	6 125
	9.34	95 100	3.15	MR 3I 280 - N280TC 284 TC	6 123
	10.7	82 750	0.8	MR 3I 160 - N280TC 284 TC	6 107
	10.7	83 150	1.06	MR 3I 180 - N280TC 284 TC	6 108
	11.5	77 300	1.7	MR 3I 200 - N280TC 284 TC	6 100
	11.7	76 150	2.36	MR 3I 225 - N280TC 284 TC	6 98.5
	11.7	76 100	3.35	MR 3I 250 - N280TC 284 TC	6 98.5
	12.3	72 400	0.95	MR 3I 160 - N280TC 284 TC	6 93.7
	12.3	72 100	1.12	MR 3I 180 - N280TC 284 TC	6 93.3
	13.3	66 800	2	MR 3I 200 - N280TC 284 TC	6 86.4
	13.0	68 600	2.8	MR 3I 225 - N280TC 284 TC	6 88.8
	12.9	68 750	3.75	MR 3I 250 - N280TC 284 TC	6 89.0
	13.7	64 750	0.8	MR 3I 160 - N250TC 254 TC	4 128
	13.4	66 200	0.95	MR 3I 160 - N280TC 284 TC	6 85.7
	13.3	66 700	1.12	MR 3I 180 - N250TC 254 TC	4 131
	13.4	66 550	1.32	MR 3I 180 - N280TC 284 TC	6 86.1
	14.7	60 500	1.7	MR 3I 200 - N250TC 254 TC	4 119
	13.7	64 900	1.9	MR 3I 200 - N280TC 284 TC	6 84.0
	14.3	62 350	2.36	MR 3I 225 - N250TC 254 TC	4 123
	13.9	63 950	2.8	MR 3I 225 - N280TC 284 TC	6 82.7
	14.0	63 450	3.35	MR 3I 250 - N250TC 254 TC	4 125
	15.3	57 900	1.18	MR 3I 160 - N280TC 284 TC	6 74.9
	15.4	57 650	1.6	MR 3I 180 - N280TC 284 TC	6 74.6
	15.8	56 100	2.36	MR 3I 200 - N280TC 284 TC	6 72.6
	17.5	50 800	0.8	MR 3I 140 - N250TC 254 TC	4 100
	16.3	54 400	1.12	MR 3I 160 - N250TC 254 TC	4 107
	18.1	49 050	1.25	MR 3I 160 - N280TC 284 TC	6 63.5
	16.3	54 650	1.5	MR 3I 180 - N250TC 254 TC	4 108
	18.0	49 300	1.7	MR 3I 180 - N280TC 284 TC	6 63.8
	17.5	50 800	2.36	MR 3I 200 - N250TC 254 TC	4 100
	17.8	50 050	3.55	MR 3I 225 - N250TC 254 TC	4 98.5

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)			Gear ratio i
15	19.6	45 400	0.95	MR 3I 140 - N250TC	254 TC	4	89.4
	18.7	47 550	1.4	MR 3I 160 - N250TC	254 TC	4	93.7
	20.7	42 900	1.6	MR 3I 160 - N280TC	284 TC	6	55.5
	18.8	47 350	1.7	MR 3I 180 - N250TC	254 TC	4	93.3
	20.2	43 900	3	MR 3I 200 - N250TC	254 TC	4	86.4
	19.7	45 050	4	MR 3I 225 - N250TC	254 TC	4	88.8
	21.5	41 350	1	MR 3I 140 - N250TC	254 TC	4	81.4
	20.4	43 500	1.4	MR 3I 160 - N250TC	254 TC	4	85.7
	22.6	39 250	1.6	MR 3I 160 - N280TC	284 TC	6	50.8
	20.3	43 700	1.9	MR 3I 180 - N250TC	254 TC	4	86.1
	22.5	39 450	2.12	MR 3I 180 - N280TC	284 TC	6	51.0
	20.8	42 650	2.8	MR 3I 200 - N250TC	254 TC	4	84.0
	21.2	42 000	4.25	MR 3I 225 - N250TC	254 TC	4	82.7
	24.1	36 950	1.12	MR 3I 140 - N250TC	254 TC	4	72.8
	23.4	38 050	1.7	MR 3I 160 - N250TC	254 TC	4	74.9
	25.9	34 300	1.9	MR 3I 160 - N280TC	284 TC	6	44.4
	23.5	37 900	2.36	MR 3I 180 - N250TC	254 TC	4	74.6
	24.1	36 850	3.55	MR 3I 200 - N250TC	254 TC	4	72.6
	28.2	31 450	1.32	MR 3I 140 - N250TC	254 TC	4	62.0
	27.6	32 250	1.9	MR 3I 160 - N250TC	254 TC	4	63.5
	29.9	29 750	2.24	MR 3I 160 - N280TC	284 TC	6	38.5
	27.4	32 400	2.5	MR 3I 180 - N250TC	254 TC	4	63.8
	28.8	30 850	2.8	MR 3I 180 - N280TC	284 TC	6	39.9
	28.0	31 800	3.75	MR 3I 200 - N250TC	254 TC	4	62.6
	31.6	28 100	1.5	MR 3I 140 - N250TC	254 TC	4	55.4
	31.5	28 200	2.36	MR 3I 160 - N250TC	254 TC	4	55.5
	31.7	28 050	2.8	MR 3I 180 - N250TC	254 TC	4	55.3
	31.7	28 050	3.15	MR 3I 180 - N280TC	284 TC	6	36.3
	32.3	27 450	4.75	MR 3I 200 - N250TC	254 TC	4	54.1
	34.7	25 600	1.6	MR 3I 140 - N250TC	254 TC	4	50.4
	34.5	25 800	2.36	MR 3I 160 - N250TC	254 TC	4	50.8
	36.4	24 450	2.8	MR 3I 160 - N280TC	284 TC	6	31.6
	34.3	25 900	3.15	MR 3I 180 - N250TC	254 TC	4	51.0
	38.8	22 900	1.8	MR 3I 140 - N250TC	254 TC	4	45.1
	39.4	22 550	2.8	MR 3I 160 - N250TC	254 TC	4	44.4
	39.6	22 450	4	MR 3I 180 - N250TC	254 TC	4	44.2
	47.7	19 000	1.7	MR 2I 140 - N280TC	284 TC	6	24.1
	45.3	19 650	2.12	MR 3I 140 - N250TC	254 TC	4	38.7
	46.7	19 450	2.65	MR 2I 160 - N280TC	284 TC	6	24.6
	45.5	19 550	3.35	MR 3I 160 - N250TC	254 TC	4	38.5
	53.0	17 100	2	MR 2I 140 - N280TC	284 TC	6	21.7
	46.6	19 050	2.12	MR 3I 140 - N250TC	254 TC	4	37.5
	48.0	18 550	3.55	MR 3I 160 - N250TC	254 TC	4	36.5
	58.5	15 500	2.36	MR 2I 140 - N280TC	284 TC	6	19.6
	54.4	16 350	2.24	MR 3I 140 - N250TC	254 TC	4	32.2
	55.3	16 050	4	MR 3I 160 - N250TC	254 TC	4	31.6
	65.5	13 850	2.65	MR 2I 140 - N280TC	284 TC	6	17.6
	60.2	14 750	2.24	MR 3I 140 - N250TC	254 TC	4	29.1
	61.7	14 400	4	MR 3I 160 - N250TC	254 TC	4	28.4
	72.6	12 500	2.36	MR 2I 140 - N250TC	254 TC	4	24.1
76.4	11 900	3	MR 2I 140 - N280TC	284 TC	6	15.1	
71.1	12 750	3.75	MR 2I 160 - N250TC	254 TC	4	24.6	
80.7	11 250	3	MR 2I 140 - N250TC	254 TC	4	21.7	
77.8	11 650	4.75	MR 2I 160 - N250TC	254 TC	4	22.5	
89.1	10 200	3.35	MR 2I 140 - N250TC	254 TC	4	19.6	
99.7	9 100	4	MR 2I 140 - N250TC	254 TC	4	17.6	
116	7 810	4.5	MR 2I 140 - N250TC	254 TC	4	15.1	
119	7 620	4.5	MR 2I 140 - N250TC	254 TC	4	14.7	
131	6 910	5	MR 2I 140 - N250TC	254 TC	4	13.3	
147	6 170	5.6	MR 2I 140 - N250TC	254 TC	4	11.9	
171	5 290	6.3	MR 2I 140 - N250TC	254 TC	4	10.2	
190	4 780	6.3	MR 2I 140 - N250TC	254 TC	4	9.22	

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
15	218	4 170	12.5	MR 2I 160 - N250TC 254 TC	4 8.03
	273	3 330	12.5	MR 2I 160 - N250TC 254 TC	4 6.41
20	9.65	122 800	0.9	MR 3I 200 - N280TC 286 TC	6 119
	9.37	126 500	1.25	MR 3I 225 - N280TC 286 TC	6 123
	9.20	128 800	1.8	MR 3I 250 - N280TC 286 TC	6 125
	9.34	126 800	2.36	MR 3I 280 - N280TC 286 TC	6 123
	10.7	110 900	0.8	MR 3I 180 - N280TC 286 TC	6 108
	11.5	103 100	1.25	MR 3I 200 - N280TC 286 TC	6 100
	11.7	101 500	1.8	MR 3I 225 - N280TC 286 TC	6 98.5
	11.7	101 400	2.5	MR 3I 250 - N280TC 286 TC	6 98.5
	11.5	103 400	3.35	MR 3I 280 - N280TC 286 TC	6 100
	12.3	96 100	0.85	MR 3I 180 - N280TC 286 TC	6 93.3
	13.3	89 050	1.5	MR 3I 200 - N280TC 286 TC	6 86.4
	13.0	91 450	2.12	MR 3I 225 - N280TC 286 TC	6 88.8
	12.9	91 700	2.8	MR 3I 250 - N280TC 286 TC	6 89.0
	12.8	92 400	4	MR 3I 280 - N280TC 286 TC	6 89.7
	13.3	88 950	0.85	MR 3I 180 - N250TC 256 TC	4 131
	13.4	88 700	0.95	MR 3I 180 - N280TC 286 TC	6 86.1
	14.7	80 700	1.32	MR 3I 200 - N250TC 256 TC	4 119
	13.7	86 550	1.5	MR 3I 200 - N280TC 286 TC	6 84.0
	14.3	83 100	1.8	MR 3I 225 - N250TC 256 TC	4 123
	13.9	85 250	2.12	MR 3I 225 - N280TC 286 TC	6 82.7
	14.0	84 600	2.5	MR 3I 250 - N250TC 256 TC	4 125
	13.9	85 150	3	MR 3I 250 - N280TC 286 TC	6 82.7
	14.2	83 350	3.55	MR 3I 280 - N250TC 256 TC	4 123
	15.3	77 200	0.9	MR 3I 160 - N280TC 286 TC	6 74.9
	15.4	76 900	1.25	MR 3I 180 - N280TC 286 TC	6 74.6
	15.8	74 800	1.8	MR 3I 200 - N280TC 286 TC	6 72.6
	15.4	76 750	2.5	MR 3I 225 - N280TC 286 TC	6 74.5
	15.4	77 000	3.35	MR 3I 250 - N280TC 286 TC	6 74.7
	16.3	72 500	0.85	MR 3I 160 - N250TC 256 TC	4 107
	18.1	65 400	0.95	MR 3I 160 - N280TC 286 TC	6 63.5
	16.3	72 850	1.12	MR 3I 180 - N250TC 256 TC	4 108
	18.0	65 750	1.25	MR 3I 180 - N280TC 286 TC	6 63.8
	17.5	67 750	1.8	MR 3I 200 - N250TC 256 TC	4 100
	17.8	66 750	2.65	MR 3I 225 - N250TC 256 TC	4 98.5
	17.8	66 650	3.75	MR 3I 250 - N250TC 256 TC	4 98.5
	18.7	63 400	1.06	MR 3I 160 - N250TC 256 TC	4 93.7
	20.7	57 200	1.18	MR 3I 160 - N280TC 286 TC	6 55.5
	18.8	63 150	1.25	MR 3I 180 - N250TC 256 TC	4 93.3
	20.8	56 950	1.4	MR 3I 180 - N280TC 286 TC	6 55.3
	20.2	58 550	2.24	MR 3I 200 - N250TC 256 TC	4 86.4
	19.7	60 100	3	MR 3I 225 - N250TC 256 TC	4 88.8
	19.7	60 250	4.25	MR 3I 250 - N250TC 256 TC	4 89.0
	20.4	58 000	1.06	MR 3I 160 - N250TC 256 TC	4 85.7
	22.6	52 300	1.18	MR 3I 160 - N280TC 286 TC	6 50.8
	20.3	58 300	1.4	MR 3I 180 - N250TC 256 TC	4 86.1
	22.5	52 600	1.6	MR 3I 180 - N280TC 286 TC	6 51.0
	20.8	56 850	2.12	MR 3I 200 - N250TC 256 TC	4 84.0
	21.2	56 000	3.15	MR 3I 225 - N250TC 256 TC	4 82.7
	24.1	49 250	0.85	MR 3I 140 - N250TC 256 TC	4 72.8
	23.4	50 750	1.32	MR 3I 160 - N250TC 256 TC	4 74.9
23.5	50 500	1.8	MR 3I 180 - N250TC 256 TC	4 74.6	
26.0	45 550	2	MR 3I 180 - N280TC 286 TC	6 44.2	
24.1	49 150	2.65	MR 3I 200 - N250TC 256 TC	4 72.6	
23.5	50 450	3.55	MR 3I 225 - N250TC 256 TC	4 74.5	
28.2	41 950	0.95	MR 3I 140 - N250TC 256 TC	4 62.0	
27.6	43 000	1.4	MR 3I 160 - N250TC 256 TC	4 63.5	
29.9	39 650	1.7	MR 3I 160 - N280TC 286 TC	6 38.5	
27.4	43 200	1.9	MR 3I 180 - N250TC 256 TC	4 63.8	
28.8	41 150	2.12	MR 3I 180 - N280TC 286 TC	6 39.9	
28.0	42 400	2.8	MR 3I 200 - N250TC 256 TC	4 62.6	
27.7	42 800	3.15	MR 3I 200 - N280TC 286 TC	6 41.5	
28.4	41 750	4	MR 3I 225 - N250TC 256 TC	4 61.7	

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
20	31.6	37 500	1.12	MR 3I 140 - N250TC 256 TC	4
	31.5	37 600	1.7	MR 3I 160 - N250TC 256 TC	4
	31.7	37 450	2.12	MR 3I 180 - N250TC 256 TC	4
	32.3	36 650	3.55	MR 3I 200 - N250TC 256 TC	4
	34.7	34 150	1.18	MR 3I 140 - N250TC 256 TC	4
	34.5	34 400	1.8	MR 3I 160 - N250TC 256 TC	4
	36.4	32 600	2	MR 3I 160 - N280TC 286 TC	6
	34.3	34 550	2.36	MR 3I 180 - N250TC 256 TC	4
	35.1	33 800	2.8	MR 3I 180 - N280TC 286 TC	6
	33.3	35 600	3.35	MR 3I 200 - N250TC 256 TC	4
	38.8	30 500	1.4	MR 3I 140 - N250TC 256 TC	4
	39.4	30 050	2.12	MR 3I 160 - N250TC 256 TC	4
	39.6	29 950	3	MR 3I 180 - N250TC 256 TC	4
	38.5	30 750	4.25	MR 3I 200 - N250TC 256 TC	4
	47.7	25 350	1.25	MR 2I 140 - N280TC 286 TC	6
	45.3	26 200	1.6	MR 3I 140 - N250TC 256 TC	4
	46.7	25 900	1.9	MR 2I 160 - N280TC 286 TC	6
	45.5	26 050	2.5	MR 3I 160 - N250TC 256 TC	4
	45.4	26 700	2.8	MR 2I 180 - N280TC 286 TC	6
	43.8	27 050	3.15	MR 3I 180 - N250TC 256 TC	4
	53.0	22 800	1.5	MR 2I 140 - N280TC 286 TC	6
	46.6	25 400	1.6	MR 3I 140 - N250TC 256 TC	4
	51.1	23 700	2.36	MR 2I 160 - N280TC 286 TC	6
	48.0	24 700	2.65	MR 3I 160 - N250TC 256 TC	4
	48.2	24 600	3.55	MR 3I 180 - N250TC 256 TC	4
	58.5	20 650	1.7	MR 2I 140 - N280TC 286 TC	6
	54.4	21 800	1.6	MR 3I 140 - N250TC 256 TC	4
	55.6	21 750	2.8	MR 2I 160 - N280TC 286 TC	6
	55.3	21 400	3.15	MR 3I 160 - N250TC 256 TC	4
	65.5	18 450	2	MR 2I 140 - N280TC 286 TC	6
	60.2	19 700	1.6	MR 3I 140 - N250TC 256 TC	4
	61.7	19 200	3	MR 3I 160 - N250TC 256 TC	4
	61.2	19 350	3.35	MR 3I 180 - N250TC 256 TC	4
	72.6	16 650	1.8	MR 2I 140 - N250TC 256 TC	4
	76.4	15 850	2.24	MR 2I 140 - N280TC 286 TC	6
	71.1	17 000	3	MR 2I 160 - N250TC 256 TC	4
	80.7	15 000	2.24	MR 2I 140 - N250TC 256 TC	4
	78.2	15 450	2.24	MR 2I 140 - N280TC 286 TC	6
	77.8	15 550	3.55	MR 2I 160 - N250TC 256 TC	4
	89.1	13 600	2.65	MR 2I 140 - N250TC 256 TC	4
	84.7	14 300	4	MR 2I 160 - N250TC 256 TC	4
	99.7	12 150	3	MR 2I 140 - N250TC 256 TC	4
	96.8	12 500	5	MR 2I 160 - N250TC 256 TC	4
	116	10 400	3.35	MR 2I 140 - N250TC 256 TC	4
	119	10 150	3.35	MR 2I 140 - N250TC 256 TC	4
	131	9 210	3.75	MR 2I 140 - N250TC 256 TC	4
	147	8 230	4.25	MR 2I 140 - N250TC 256 TC	4
	171	7 060	4.75	MR 2I 140 - N250TC 256 TC	4
	190	6 380	4.75	MR 2I 140 - N250TC 256 TC	4
	218	5 550	9.5	MR 2I 160 - N250TC 256 TC	4
	273	4 440	9.5	MR 2I 160 - N250TC 256 TC	4
25	9.37	158 100	1	MR 3I 225 - N320TC 324 TC	6
	9.20	161 000	1.4	MR 3I 250 - N320TC 324 TC	6
	9.34	158 500	1.9	MR 3I 280 - N320TC 324 TC	6
	9.07	163 200	2.36	MR 3I 320 - N320TC 324 TC	6
	9.07	163 200	3	MR 3I 321 - N320TC 324 TC	6
	11.5	128 900	1	MR 3I 200 - N320TC 324 TC	6
	11.7	126 900	1.5	MR 3I 225 - N320TC 324 TC	6
	11.7	126 800	2	MR 3I 250 - N320TC 324 TC	6
	11.5	129 200	2.65	MR 3I 280 - N320TC 324 TC	6
	11.0	134 900	3.35	MR 3I 320 - N320TC 324 TC	6

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
25	13.3	111 300	1.25	MR 3I 200 - N320TC 324 TC	6
	13.0	114 300	1.7	MR 3I 225 - N320TC 324 TC	6
	12.9	114 600	2.36	MR 3I 250 - N320TC 324 TC	6
	12.8	115 500	3.15	MR 3I 280 - N320TC 324 TC	6
	14.7	100 900	1.06	MR 3I 200 - N280TC 284 TC	4
	13.7	108 200	1.18	MR 3I 200 - N320TC 324 TC	6
	14.3	103 900	1.5	MR 3I 225 - N280TC 284 TC	4
	13.9	106 600	1.7	MR 3I 225 - N320TC 324 TC	6
	14.0	105 800	2	MR 3I 250 - N280TC 284 TC	4
	13.9	106 500	2.36	MR 3I 250 - N320TC 324 TC	6
	14.2	104 200	2.8	MR 3I 280 - N280TC 284 TC	4
	15.8	93 500	1.4	MR 3I 200 - N320TC 324 TC	6
	15.4	95 950	2	MR 3I 225 - N320TC 324 TC	6
	15.4	96 250	2.65	MR 3I 250 - N320TC 324 TC	6
	15.3	96 950	3.75	MR 3I 280 - N320TC 324 TC	6
	16.3	91 100	0.9	MR 3I 180 - N280TC 284 TC	4
	17.5	84 650	1.4	MR 3I 200 - N280TC 284 TC	4
	17.8	83 400	2.12	MR 3I 225 - N280TC 284 TC	4
	17.8	83 350	3	MR 3I 250 - N280TC 284 TC	4
	17.4	84 950	3.75	MR 3I 280 - N280TC 284 TC	4
	18.7	79 300	0.85	MR 3I 160 - N280TC 284 TC	4
	18.8	78 950	1	MR 3I 180 - N280TC 284 TC	4
	20.2	73 150	1.8	MR 3I 200 - N280TC 284 TC	4
	19.7	75 100	2.5	MR 3I 225 - N280TC 284 TC	4
	19.7	75 300	3.35	MR 3I 250 - N280TC 284 TC	4
	20.4	72 500	0.85	MR 3I 160 - N280TC 284 TC	4
	20.3	72 850	1.12	MR 3I 180 - N280TC 284 TC	4
	20.8	71 100	1.7	MR 3I 200 - N280TC 284 TC	4
	21.2	70 050	2.5	MR 3I 225 - N280TC 284 TC	4
	21.2	69 950	3.55	MR 3I 250 - N280TC 284 TC	4
	23.4	63 400	1.06	MR 3I 160 - N280TC 284 TC	4
	23.5	63 150	1.4	MR 3I 180 - N280TC 284 TC	4
	24.1	61 450	2.12	MR 3I 200 - N280TC 284 TC	4
	23.5	63 050	2.8	MR 3I 225 - N280TC 284 TC	4
	23.4	63 250	4	MR 3I 250 - N280TC 284 TC	4
	27.6	53 700	1.12	MR 3I 160 - N280TC 284 TC	4
	27.4	54 000	1.5	MR 3I 180 - N280TC 284 TC	4
	28.0	53 000	2.24	MR 3I 200 - N280TC 284 TC	4
	27.7	53 500	2.5	MR 3I 200 - N320TC 324 TC	6
	28.4	52 200	3.35	MR 3I 225 - N280TC 284 TC	4
	31.5	47 000	1.4	MR 3I 160 - N280TC 284 TC	4
	31.7	46 800	1.7	MR 3I 180 - N280TC 284 TC	4
	32.3	45 800	2.8	MR 3I 200 - N280TC 284 TC	4
	31.5	47 000	3.75	MR 3I 225 - N280TC 284 TC	4
	34.5	43 000	1.4	MR 3I 160 - N280TC 284 TC	4
	34.3	43 200	1.9	MR 3I 180 - N280TC 284 TC	4
	33.3	44 500	2.65	MR 3I 200 - N280TC 284 TC	4
	36.5	40 550	3.35	MR 3I 200 - N320TC 324 TC	6
	33.8	43 800	4	MR 3I 225 - N280TC 284 TC	4
	39.4	37 600	1.7	MR 3I 160 - N280TC 284 TC	4
	39.6	37 450	2.36	MR 3I 180 - N280TC 284 TC	4
	38.5	38 450	3.35	MR 3I 200 - N280TC 284 TC	4
	46.7	32 400	1.5	MR 2I 160 - N320TC 324 TC	6
	45.5	32 600	2	MR 3I 160 - N280TC 284 TC	4
	45.4	33 350	2.24	MR 2I 180 - N320TC 324 TC	6
	43.8	33 800	2.5	MR 3I 180 - N280TC 284 TC	4
	42.1	35 150	3.75	MR 3I 200 - N280TC 284 TC	4
	51.1	29 600	1.9	MR 2I 160 - N320TC 324 TC	6
	48.0	30 900	2.12	MR 3I 160 - N280TC 284 TC	4
	49.3	30 700	2.65	MR 2I 180 - N320TC 324 TC	6
	48.2	30 750	2.8	MR 3I 180 - N280TC 284 TC	4
	50.8	29 150	4.25	MR 3I 200 - N280TC 284 TC	4
	55.6	27 200	2.24	MR 2I 160 - N320TC 324 TC	6
	55.3	26 750	2.5	MR 3I 160 - N280TC 284 TC	4
	55.4	27 300	3	MR 2I 180 - N320TC 324 TC	6
	53.4	27 750	3.35	MR 3I 180 - N280TC 284 TC	4

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
25	63.6	23 800	2.65	MR 2I 160 - N320TC 324 TC	6 18.1
	61.7	24 000	2.5	MR 3I 160 - N280TC 284 TC	4 28.4
	63.9	23 700	3	MR 2I 180 - N320TC 324 TC	6 18.0
	61.2	24 200	2.65	MR 3I 180 - N280TC 284 TC	4 28.6
	64.3	23 050	5.6	MR 3I 200 - N280TC 284 TC	4 27.2
	72.6	20 800	1.4	MR 2I 140 - N280TC 284 TC	4 24.1
	71.1	21 300	2.36	MR 2I 160 - N280TC 284 TC	4 24.6
	73.4	20 600	3	MR 2I 160 - N320TC 324 TC	6 15.7
	69.0	21 900	3.35	MR 2I 180 - N280TC 284 TC	4 25.4
	80.7	18 750	1.8	MR 2I 140 - N280TC 284 TC	4 21.7
	77.8	19 450	2.8	MR 2I 160 - N280TC 284 TC	4 22.5
	81.8	18 500	3	MR 2I 160 - N320TC 324 TC	6 14.1
	75.0	20 150	4	MR 2I 180 - N280TC 284 TC	4 23.3
	89.1	17 000	2.12	MR 2I 140 - N280TC 284 TC	4 19.6
	84.7	17 850	3.35	MR 2I 160 - N280TC 284 TC	4 20.7
	99.7	15 150	2.36	MR 2I 140 - N280TC 284 TC	4 17.6
	96.8	15 600	4	MR 2I 160 - N280TC 284 TC	4 18.1
	116	13 000	2.8	MR 2I 140 - N280TC 284 TC	4 15.1
	112	13 550	4.5	MR 2I 160 - N280TC 284 TC	4 15.7
	119	12 700	2.65	MR 2I 140 - N280TC 284 TC	4 14.7
	124	12 150	4.5	MR 2I 160 - N280TC 284 TC	4 14.1
	131	11 500	3	MR 2I 140 - N280TC 284 TC	4 13.3
	129	11 750	5	MR 2I 160 - N280TC 284 TC	4 13.6
	147	10 300	3.35	MR 2I 140 - N280TC 284 TC	4 11.9
	171	8 820	3.75	MR 2I 140 - N280TC 284 TC	4 10.2
	190	7 970	3.75	MR 2I 140 - N280TC 284 TC	4 9.22
	218	6 940	7.5	MR 2I 160 - N280TC 284 TC	4 8.03
	273	5 540	7.5	MR 2I 160 - N280TC 284 TC	4 6.41
30	9.37	189 700	0.85	MR 3I 225 - N320TC 326 TC	6 123
	9.20	193 100	1.18	MR 3I 250 - N320TC 326 TC	6 125
	9.34	190 200	1.6	MR 3I 280 - N320TC 326 TC	6 123
	9.07	195 900	1.9	MR 3I 320 - N320TC 326 TC	6 127
	9.07	195 900	2.36	MR 3I 321 - N320TC 326 TC	6 127
	8.81	201 800	3.35	MR 3I 360 - N320TC 326 TC	6 131
	11.5	154 600	0.85	MR 3I 200 - N320TC 326 TC	6 100
	11.7	152 300	1.18	MR 3I 225 - N320TC 326 TC	6 98.5
	11.7	152 200	1.7	MR 3I 250 - N320TC 326 TC	6 98.5
	11.5	155 100	2.12	MR 3I 280 - N320TC 326 TC	6 100
	11.0	161 800	2.8	MR 3I 320 - N320TC 326 TC	6 105
	11.0	161 800	3.55	MR 3I 321 - N320TC 326 TC	6 105
	13.3	133 600	1	MR 3I 200 - N320TC 326 TC	6 86.4
	13.0	137 200	1.4	MR 3I 225 - N320TC 326 TC	6 88.8
	12.9	137 500	1.9	MR 3I 250 - N320TC 326 TC	6 89.0
	12.8	138 600	2.65	MR 3I 280 - N320TC 326 TC	6 89.7
	12.8	139 300	3	MR 3I 320 - N320TC 326 TC	6 90.1
	14.7	121 000	0.85	MR 3I 200 - N280TC 286 TC	4 119
	13.7	129 800	0.95	MR 3I 200 - N320TC 326 TC	6 84.0
	14.3	124 700	1.18	MR 3I 225 - N280TC 286 TC	4 123
	13.9	127 900	1.4	MR 3I 225 - N320TC 326 TC	6 82.7
	14.0	126 900	1.7	MR 3I 250 - N280TC 286 TC	4 125
	13.9	127 800	2	MR 3I 250 - N320TC 326 TC	6 82.7
	14.2	125 000	2.36	MR 3I 280 - N280TC 286 TC	4 123
	13.9	127 500	3.35	MR 3I 320 - N320TC 326 TC	6 82.5
	15.8	112 200	1.18	MR 3I 200 - N320TC 326 TC	6 72.6
	15.4	115 200	1.6	MR 3I 225 - N320TC 326 TC	6 74.5
	15.4	115 500	2.24	MR 3I 250 - N320TC 326 TC	6 74.7
	15.3	116 400	3.15	MR 3I 280 - N320TC 326 TC	6 75.3
	17.5	101 600	1.18	MR 3I 200 - N280TC 286 TC	4 100
	17.8	100 100	1.7	MR 3I 225 - N280TC 286 TC	4 98.5
	17.8	100 000	2.5	MR 3I 250 - N280TC 286 TC	4 98.5
	17.4	101 900	3.15	MR 3I 280 - N280TC 286 TC	4 100

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
30	18.8	94 750	0.85	MR 3I 180 - N280TC 286 TC	4 93.3
	20.2	87 800	1.5	MR 3I 200 - N280TC 286 TC	4 86.4
	19.7	90 150	2	MR 3I 225 - N280TC 286 TC	4 88.8
	19.7	90 400	2.8	MR 3I 250 - N280TC 286 TC	4 89.0
	19.5	91 050	4	MR 3I 280 - N280TC 286 TC	4 89.7
	20.3	87 450	0.95	MR 3I 180 - N280TC 286 TC	4 86.1
	20.8	85 300	1.4	MR 3I 200 - N280TC 286 TC	4 84.0
	21.2	84 050	2.12	MR 3I 225 - N280TC 286 TC	4 82.7
	21.2	83 950	3	MR 3I 250 - N280TC 286 TC	4 82.7
	20.8	85 550	3.75	MR 3I 280 - N280TC 286 TC	4 84.3
	23.4	76 100	0.85	MR 3I 160 - N280TC 286 TC	4 74.9
	23.5	75 800	1.18	MR 3I 180 - N280TC 286 TC	4 74.6
	24.1	73 700	1.7	MR 3I 200 - N280TC 286 TC	4 72.6
	23.5	75 700	2.36	MR 3I 225 - N280TC 286 TC	4 74.5
	23.4	75 900	3.35	MR 3I 250 - N280TC 286 TC	4 74.7
	27.6	64 450	0.95	MR 3I 160 - N280TC 286 TC	4 63.5
	27.4	64 800	1.25	MR 3I 180 - N280TC 286 TC	4 63.8
	28.0	63 600	1.9	MR 3I 200 - N280TC 286 TC	4 62.6
	27.7	64 200	2.12	MR 3I 200 - N320TC 326 TC	6 41.5
	28.4	62 650	2.8	MR 3I 225 - N280TC 286 TC	4 61.7
	28.4	62 500	3.75	MR 3I 250 - N280TC 286 TC	4 61.5
	31.5	56 400	1.18	MR 3I 160 - N280TC 286 TC	4 55.5
	31.7	56 150	1.4	MR 3I 180 - N280TC 286 TC	4 55.3
	32.3	54 950	2.36	MR 3I 200 - N280TC 286 TC	4 54.1
	31.5	56 400	3.15	MR 3I 225 - N280TC 286 TC	4 55.5
	34.5	51 550	1.18	MR 3I 160 - N280TC 286 TC	4 50.8
	34.3	51 850	1.6	MR 3I 180 - N280TC 286 TC	4 51.0
	33.3	53 400	2.24	MR 3I 200 - N280TC 286 TC	4 52.6
	36.5	48 650	2.8	MR 3I 200 - N320TC 326 TC	6 31.5
	33.8	52 600	3.15	MR 3I 225 - N280TC 286 TC	4 51.8
	37.6	47 350	4	MR 3I 225 - N320TC 326 TC	6 30.6
	39.4	45 100	1.4	MR 3I 160 - N280TC 286 TC	4 44.4
	39.6	44 900	2	MR 3I 180 - N280TC 286 TC	4 44.2
	38.5	46 150	2.8	MR 3I 200 - N280TC 286 TC	4 45.4
	42.2	42 050	3.15	MR 3I 200 - N320TC 326 TC	6 27.2
	37.5	47 350	3.75	MR 3I 225 - N280TC 286 TC	4 46.6
	46.7	38 850	1.32	MR 2I 160 - N320TC 326 TC	6 24.6
	45.5	39 100	1.7	MR 3I 160 - N280TC 286 TC	4 38.5
	45.4	40 000	1.8	MR 2I 180 - N320TC 326 TC	6 25.4
	43.8	40 550	2.12	MR 3I 180 - N280TC 286 TC	4 39.9
	47.4	38 250	2.65	MR 2I 200 - N320TC 326 TC	6 24.2
	42.1	42 200	3.15	MR 3I 200 - N280TC 286 TC	4 41.5
	51.1	35 500	1.6	MR 2I 160 - N320TC 326 TC	6 22.5
	48.0	37 050	1.8	MR 3I 160 - N280TC 286 TC	4 36.5
	49.3	36 850	2.24	MR 2I 180 - N320TC 326 TC	6 23.3
	48.2	36 900	2.36	MR 3I 180 - N280TC 286 TC	4 36.3
	50.8	34 950	3.55	MR 3I 200 - N280TC 286 TC	4 34.4
	55.6	32 600	1.8	MR 2I 160 - N320TC 326 TC	6 20.7
	55.3	32 100	2	MR 3I 160 - N280TC 286 TC	4 31.6
	55.4	32 800	2.5	MR 2I 180 - N320TC 326 TC	6 20.8
	53.4	33 300	2.8	MR 3I 180 - N280TC 286 TC	4 32.8
	55.6	32 000	4	MR 3I 200 - N280TC 286 TC	4 31.5
	63.6	28 550	2.24	MR 2I 160 - N320TC 326 TC	6 18.1
	61.7	28 850	2	MR 3I 160 - N280TC 286 TC	4 28.4
	63.9	28 400	2.5	MR 2I 180 - N320TC 326 TC	6 18.0
	61.2	29 050	2.24	MR 3I 180 - N280TC 286 TC	4 28.6
	64.3	27 650	4.75	MR 3I 200 - N280TC 286 TC	4 27.2
	72.6	25 000	1.18	MR 2I 140 - N280TC 286 TC	4 24.1
	71.1	25 550	1.9	MR 2I 160 - N280TC 286 TC	4 24.6
	73.4	24 750	2.5	MR 2I 160 - N320TC 326 TC	6 15.7
	69.0	26 300	2.8	MR 2I 180 - N280TC 286 TC	4 25.4
	72.2	25 150	4	MR 2I 200 - N280TC 286 TC	4 24.2
	80.7	22 500	1.5	MR 2I 140 - N280TC 286 TC	4 21.7
	77.8	23 350	2.36	MR 2I 160 - N280TC 286 TC	4 22.5
	75.0	24 200	3.35	MR 2I 180 - N280TC 286 TC	4 23.3
	79.0	23 000	4.75	MR 2I 200 - N280TC 286 TC	4 22.2

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
30	89.1	20 350	1.7	MR 2I 140 - N280TC	286 TC 4
	84.7	21 450	2.8	MR 2I 160 - N280TC	286 TC 4
	84.3	21 550	3.75	MR 2I 180 - N280TC	286 TC 4
	99.7	18 200	2	MR 2I 140 - N280TC	286 TC 4
	96.8	18 750	3.35	MR 2I 160 - N280TC	286 TC 4
	116	15 600	2.24	MR 2I 140 - N280TC	286 TC 4
	112	16 250	3.75	MR 2I 160 - N280TC	286 TC 4
	119	15 250	2.24	MR 2I 140 - N280TC	286 TC 4
	124	14 600	3.75	MR 2I 160 - N280TC	286 TC 4
	131	13 800	2.5	MR 2I 140 - N280TC	286 TC 4
	129	14 100	4	MR 2I 160 - N280TC	286 TC 4
	147	12 350	2.8	MR 2I 140 - N280TC	286 TC 4
	147	12 300	5	MR 2I 160 - N280TC	286 TC 4
	171	10 600	3.15	MR 2I 140 - N280TC	286 TC 4
	190	9 570	3.15	MR 2I 140 - N280TC	286 TC 4
	218	8 330	6.3	MR 2I 160 - N280TC	286 TC 4
	273	6 650	6.3	MR 2I 160 - N280TC	286 TC 4
40	9.20	257 500	0.9	MR 3I 250 - N360TC	364 TC 6
	9.34	253 600	1.18	MR 3I 280 - N360TC	364 TC 6
	9.07	261 200	1.5	MR 3I 320 - N360TC	364 TC 6
	9.07	261 200	1.8	MR 3I 321 - N360TC	364 TC 6
	8.81	269 100	2.5	MR 3I 360 - N360TC	364 TC 6
	11.7	203 100	0.9	MR 3I 225 - N360TC	364 TC 6
	11.7	202 900	1.32	MR 3I 250 - N360TC	364 TC 6
	11.5	206 800	1.6	MR 3I 280 - N360TC	364 TC 6
	11.0	215 800	2.12	MR 3I 320 - N360TC	364 TC 6
	11.0	215 800	2.65	MR 3I 321 - N360TC	364 TC 6
	11.2	212 200	3.55	MR 3I 360 - N360TC	364 TC 6
	13.0	182 900	1.06	MR 3I 225 - N360TC	364 TC 6
	12.9	183 400	1.4	MR 3I 250 - N360TC	364 TC 6
	12.8	184 800	2	MR 3I 280 - N360TC	364 TC 6
	12.8	185 700	2.24	MR 3I 320 - N360TC	364 TC 6
	12.8	185 700	2.8	MR 3I 321 - N360TC	364 TC 6
	12.4	191 000	3.75	MR 3I 360 - N360TC	364 TC 6
	14.3	166 200	0.9	MR 3I 225 - N320TC	324 TC 4
	13.9	170 500	1.06	MR 3I 225 - N360TC	364 TC 6
	14.0	169 200	1.25	MR 3I 250 - N320TC	324 TC 4
	13.9	170 300	1.5	MR 3I 250 - N360TC	364 TC 6
	14.2	166 700	1.7	MR 3I 280 - N320TC	324 TC 4
	13.8	171 600	2.12	MR 3I 320 - N320TC	324 TC 4
	13.9	170 000	2.5	MR 3I 320 - N360TC	364 TC 6
	13.8	171 600	2.65	MR 3I 321 - N320TC	324 TC 4
	13.9	170 000	3.15	MR 3I 321 - N360TC	364 TC 6
	13.4	176 800	3.55	MR 3I 360 - N320TC	324 TC 4
	15.8	149 600	0.9	MR 3I 200 - N360TC	364 TC 6
	15.4	153 500	1.25	MR 3I 225 - N360TC	364 TC 6
	15.4	154 000	1.7	MR 3I 250 - N360TC	364 TC 6
	15.3	155 100	2.36	MR 3I 280 - N360TC	364 TC 6
	16.2	146 300	2.8	MR 3I 320 - N360TC	364 TC 6
	16.2	146 300	3.55	MR 3I 321 - N360TC	364 TC 6
	17.5	135 500	0.9	MR 3I 200 - N320TC	324 TC 4
	17.8	133 500	1.32	MR 3I 225 - N320TC	324 TC 4
	17.8	133 300	1.8	MR 3I 250 - N320TC	324 TC 4
	17.4	135 900	2.36	MR 3I 280 - N320TC	324 TC 4
	16.7	141 800	3	MR 3I 320 - N320TC	324 TC 4
	16.7	141 800	3.75	MR 3I 321 - N320TC	324 TC 4
	20.2	117 100	1.12	MR 3I 200 - N320TC	324 TC 4
	19.7	120 200	1.5	MR 3I 225 - N320TC	324 TC 4
	19.7	120 500	2.12	MR 3I 250 - N320TC	324 TC 4
	19.5	121 400	3	MR 3I 280 - N320TC	324 TC 4
	19.4	122 000	3.35	MR 3I 320 - N320TC	324 TC 4

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
40	20.8	113 700	1.06	MR 3I 200 - N320TC	324 TC 4
	21.2	112 000	1.5	MR 3I 225 - N320TC	324 TC 4
	22.8	104 000	1.4	MR 3I 225 - N320TC	324 TC 4
	21.2	111 900	2.12	MR 3I 250 - N320TC	324 TC 4
	20.8	114 100	2.8	MR 3I 280 - N320TC	324 TC 4
	21.2	111 700	3.75	MR 3I 320 - N320TC	324 TC 4
	24.1	98 300	1.32	MR 3I 200 - N320TC	324 TC 4
	23.5	100 900	1.8	MR 3I 225 - N320TC	324 TC 4
	23.4	101 200	2.5	MR 3I 250 - N320TC	324 TC 4
	23.2	101 900	3.55	MR 3I 280 - N320TC	324 TC 4
	28.0	84 800	1.4	MR 3I 200 - N320TC	324 TC 4
	28.4	83 500	2	MR 3I 225 - N320TC	324 TC 4
	28.4	83 350	2.8	MR 3I 250 - N320TC	324 TC 4
	27.9	84 950	3.75	MR 3I 280 - N320TC	324 TC 4
	32.3	73 250	1.7	MR 3I 200 - N320TC	324 TC 4
	31.5	75 200	2.36	MR 3I 225 - N320TC	324 TC 4
	31.5	75 300	3.35	MR 3I 250 - N320TC	324 TC 4
	33.3	71 200	1.7	MR 3I 200 - N320TC	324 TC 4
	36.5	64 900	2	MR 3I 200 - N360TC	364 TC 6
	33.8	70 100	2.5	MR 3I 225 - N320TC	324 TC 4
	37.6	63 100	3	MR 3I 225 - N360TC	364 TC 6
	33.9	69 950	3.35	MR 3I 250 - N320TC	324 TC 4
	38.5	61 500	2.12	MR 3I 200 - N320TC	324 TC 4
	37.5	63 150	2.8	MR 3I 225 - N320TC	324 TC 4
	37.5	63 250	3.75	MR 3I 250 - N320TC	324 TC 4
	46.7	51 800	0.95	MR 2I 160 - N360TC	364 TC 6
	45.4	53 350	1.4	MR 2I 180 - N360TC	364 TC 6
	47.4	51 000	2	MR 2I 200 - N360TC	364 TC 6
	42.1	56 250	2.36	MR 3I 200 - N320TC	324 TC 4
	46.1	52 550	2.8	MR 2I 225 - N360TC	364 TC 6
	43.3	54 700	3.35	MR 3I 225 - N320TC	324 TC 4
	51.1	47 350	1.18	MR 2I 160 - N360TC	364 TC 6
	49.3	49 100	1.6	MR 2I 180 - N360TC	364 TC 6
	51.9	46 600	2.36	MR 2I 200 - N360TC	364 TC 6
	50.8	46 650	2.65	MR 3I 200 - N320TC	324 TC 4
	49.5	47 850	3.75	MR 3I 225 - N320TC	324 TC 4
	55.6	43 500	1.4	MR 2I 160 - N360TC	364 TC 6
	55.4	43 700	1.8	MR 2I 180 - N360TC	364 TC 6
	56.5	42 800	2.8	MR 2I 200 - N360TC	364 TC 6
	55.6	42 650	3	MR 3I 200 - N320TC	324 TC 4
	57.1	41 450	4	MR 3I 225 - N320TC	324 TC 4
	63.6	38 050	1.7	MR 2I 160 - N360TC	364 TC 6
	63.9	37 900	1.8	MR 2I 180 - N360TC	364 TC 6
	65.4	37 000	3.35	MR 2I 200 - N360TC	364 TC 6
	64.3	36 850	3.55	MR 3I 200 - N320TC	324 TC 4
	71.1	34 050	1.5	MR 2I 160 - N320TC	324 TC 4
	73.4	32 950	1.8	MR 2I 160 - N360TC	364 TC 6
	69.0	35 050	2	MR 2I 180 - N320TC	324 TC 4
	72.2	33 500	3	MR 2I 200 - N320TC	324 TC 4
	71.5	33 850	3.75	MR 2I 200 - N360TC	364 TC 6
	70.1	34 550	4.25	MR 2I 225 - N320TC	324 TC 4
	77.8	31 100	1.8	MR 2I 160 - N320TC	324 TC 4
	75.0	32 250	2.5	MR 2I 180 - N320TC	324 TC 4
	79.0	30 650	3.55	MR 2I 200 - N320TC	324 TC 4
	84.7	28 600	2	MR 2I 160 - N320TC	324 TC 4
	84.3	28 700	2.8	MR 2I 180 - N320TC	324 TC 4
	86.0	28 150	4.25	MR 2I 200 - N320TC	324 TC 4
	96.8	25 000	2.5	MR 2I 160 - N320TC	324 TC 4
	97.2	24 900	2.8	MR 2I 180 - N320TC	324 TC 4
	99.5	24 300	5	MR 2I 200 - N320TC	324 TC 4
	112	21 650	2.8	MR 2I 160 - N320TC	324 TC 4
	105	23 000	3.35	MR 2I 180 - N320TC	324 TC 4
	124	19 450	2.8	MR 2I 160 - N320TC	324 TC 4
	124	19 450	3.15	MR 2I 160 - N360TC	364 TC 6
	122	19 900	3.75	MR 2I 180 - N320TC	324 TC 4

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.
2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
40	129	18 800	3.15	MR 2I 160 - N320TC 324 TC 4	13.6
	147	16 450	3.75	MR 2I 160 - N320TC 324 TC 4	11.9
	170	14 250	4	MR 2I 160 - N320TC 324 TC 4	10.3
	189	12 800	4	MR 2I 160 - N320TC 324 TC 4	9.24
	218	11 100	4.75	MR 2I 160 - N320TC 324 TC 4	8.03
	273	8 870	4.75	MR 2I 160 - N320TC 324 TC 4	6.41
50	9.34	317 000	0.95	MR 3I 280 - N360TC 365 TC 6	123
	9.07	326 500	1.18	MR 3I 320 - N360TC 365 TC 6	127
	9.07	326 500	1.5	MR 3I 321 - N360TC 365 TC 6	127
	8.81	336 300	2	MR 3I 360 - N360TC 365 TC 6	131
	11.7	253 600	1	MR 3I 250 - N360TC 365 TC 6	98.5
	11.5	258 500	1.32	MR 3I 280 - N360TC 365 TC 6	100
	11.0	269 700	1.7	MR 3I 320 - N360TC 365 TC 6	105
	11.0	269 700	2.12	MR 3I 321 - N360TC 365 TC 6	105
	11.2	265 300	2.8	MR 3I 360 - N360TC 365 TC 6	103
	13.0	228 600	0.85	MR 3I 225 - N360TC 365 TC 6	88.8
	12.9	229 200	1.18	MR 3I 250 - N360TC 365 TC 6	89.0
	12.8	231 000	1.6	MR 3I 280 - N360TC 365 TC 6	89.7
	12.8	232 100	1.8	MR 3I 320 - N360TC 365 TC 6	90.1
	12.8	232 100	2.24	MR 3I 321 - N360TC 365 TC 6	90.1
	12.4	238 800	3	MR 3I 360 - N360TC 365 TC 6	92.7
	13.9	213 100	0.85	MR 3I 225 - N360TC 365 TC 6	82.7
	14.0	211 500	1	MR 3I 250 - N320TC 326 TC 4	125
	13.9	212 900	1.18	MR 3I 250 - N360TC 365 TC 6	82.7
	14.2	208 300	1.4	MR 3I 280 - N320TC 326 TC 4	123
	13.8	214 600	1.7	MR 3I 320 - N320TC 326 TC 4	127
	13.9	212 500	2	MR 3I 320 - N360TC 365 TC 6	82.5
	13.8	214 600	2.12	MR 3I 321 - N320TC 326 TC 4	127
	13.9	212 500	2.5	MR 3I 321 - N360TC 365 TC 6	82.5
	13.4	221 000	2.8	MR 3I 360 - N320TC 326 TC 4	131
	14.2	209 000	3.35	MR 3I 360 - N360TC 365 TC 6	81.1
	15.4	191 900	1	MR 3I 225 - N360TC 365 TC 6	74.5
	15.4	192 500	1.32	MR 3I 250 - N360TC 365 TC 6	74.7
	15.3	193 900	1.9	MR 3I 280 - N360TC 365 TC 6	75.3
	16.2	182 900	2.24	MR 3I 320 - N360TC 365 TC 6	71.0
	16.2	182 900	2.8	MR 3I 321 - N360TC 365 TC 6	71.0
	15.7	188 100	4	MR 3I 360 - N360TC 365 TC 6	73.0
	17.8	166 800	1.06	MR 3I 225 - N320TC 326 TC 4	98.5
	17.8	166 700	1.5	MR 3I 250 - N320TC 326 TC 4	98.5
	17.4	169 900	1.9	MR 3I 280 - N320TC 326 TC 4	100
	16.7	177 200	2.36	MR 3I 320 - N320TC 326 TC 4	105
	16.7	177 200	3	MR 3I 321 - N320TC 326 TC 4	105
	17.0	174 300	4	MR 3I 360 - N320TC 326 TC 4	103
	20.2	146 300	0.9	MR 3I 200 - N320TC 326 TC 4	86.4
	19.7	150 200	1.18	MR 3I 225 - N320TC 326 TC 4	88.8
	19.7	150 600	1.7	MR 3I 250 - N320TC 326 TC 4	89.0
	19.5	151 800	2.36	MR 3I 280 - N320TC 326 TC 4	89.7
	19.4	152 500	2.65	MR 3I 320 - N320TC 326 TC 4	90.1
	19.4	152 500	3.35	MR 3I 321 - N320TC 326 TC 4	90.1
	20.8	142 200	0.85	MR 3I 200 - N320TC 326 TC 4	84.0
	21.2	140 100	1.25	MR 3I 225 - N320TC 326 TC 4	82.7
	22.8	130 000	1.12	MR 3I 225 - N320TC 326 TC 4	76.8
	21.2	139 900	1.7	MR 3I 250 - N320TC 326 TC 4	82.7
	20.8	142 600	2.24	MR 3I 280 - N320TC 326 TC 4	84.3
	22.8	130 200	2.24	MR 3I 280 - N320TC 326 TC 4	76.9
	21.2	139 600	3	MR 3I 320 - N320TC 326 TC 4	82.5
	21.2	139 600	3.75	MR 3I 321 - N320TC 326 TC 4	82.5
	24.1	122 900	1.06	MR 3I 200 - N320TC 326 TC 4	72.6
	23.5	126 100	1.4	MR 3I 225 - N320TC 326 TC 4	74.5
	23.4	126 500	2	MR 3I 250 - N320TC 326 TC 4	74.7
	23.2	127 400	2.8	MR 3I 280 - N320TC 326 TC 4	75.3
	24.6	120 200	3.35	MR 3I 320 - N320TC 326 TC 4	71.0
50	28.0	106 000	1.12	MR 3I 200 - N320TC 326 TC 4	62.6
	28.4	104 400	1.6	MR 3I 225 - N320TC 326 TC 4	61.7
	28.4	104 200	2.36	MR 3I 250 - N320TC 326 TC 4	61.5
	27.9	106 200	3	MR 3I 280 - N320TC 326 TC 4	62.7
	26.1	113 600	3.75	MR 3I 320 - N320TC 326 TC 4	67.1
	32.3	91 550	1.4	MR 3I 200 - N320TC 326 TC 4	54.1
	31.5	94 000	1.9	MR 3I 225 - N320TC 326 TC 4	55.5
	31.5	94 150	2.65	MR 3I 250 - N320TC 326 TC 4	55.6
	31.2	94 850	3.75	MR 3I 280 - N320TC 326 TC 4	56.0
	33.3	89 000	1.32	MR 3I 200 - N320TC 326 TC 4	52.6
	36.5	81 100	1.6	MR 3I 200 - N360TC 365 TC 6	31.5
	33.8	87 650	1.9	MR 3I 225 - N320TC 326 TC 4	51.8
	37.6	78 900	2.5	MR 3I 225 - N360TC 365 TC 6	30.6
	33.9	87 450	2.8	MR 3I 250 - N320TC 326 TC 4	51.7
	33.2	89 150	3.55	MR 3I 280 - N320TC 326 TC 4	52.7
	38.5	76 900	1.6	MR 3I 200 - N320TC 326 TC 4	45.4
	42.2	70 100	1.9	MR 3I 200 - N360TC 365 TC 6	27.2
	37.5	78 950	2.24	MR 3I 225 - N320TC 326 TC 4	46.6
	37.5	79 050	3.15	MR 3I 250 - N320TC 326 TC 4	46.7
	37.2	79 650	4	MR 3I 280 - N320TC 326 TC 4	47.1
	45.4	66 700	1.12	MR 2I 180 - N360TC 365 TC 6	25.4
	47.4	63 750	1.6	MR 2I 200 - N360TC 365 TC 6	24.2
	42.1	70 300	1.9	MR 3I 200 - N320TC 326 TC 4	41.5
	46.1	65 700	2.24	MR 2I 225 - N360TC 365 TC 6	25.0
	43.3	68 400	2.65	MR 3I 225 - N320TC 326 TC 4	40.4
	41.2	71 850	3.55	MR 3I 250 - N320TC 326 TC 4	42.4
	51.1	59 200	0.95	MR 2I 160 - N360TC 365 TC 6	22.5
	49.3	61 400	1.32	MR 2I 180 - N360TC 365 TC 6	23.3
	51.9	58 300	1.9	MR 2I 200 - N360TC 365 TC 6	22.2
	50.8	58 300	2.12	MR 3I 200 - N320TC 326 TC 4	34.4
	50.1	60 450	2.65	MR 2I 225 - N360TC 365 TC 6	23.0
	49.5	59 850	3	MR 3I 225 - N320TC 326 TC 4	35.4
	47.4	62 450	4	MR 3I 250 - N320TC 326 TC 4	36.9
	55.6	54 350	1.12	MR 2I 160 - N360TC 365 TC 6	20.7
	55.4	54 650	1.5	MR 2I 180 - N360TC 365 TC 6	20.8
	56.5	53 550	2.24	MR 2I 200 - N360TC 365 TC 6	20.3
	55.6	53 300	2.5	MR 3I 200 - N320TC 326 TC 4	31.5
	57.1	51 850	3.15	MR 3I 225 - N320TC 326 TC 4	30.6
	52.2	56 800	4.5	MR 3I 250 - N320TC 326 TC 4	33.5
	63.6	47 550	1.32	MR 2I 160 - N360TC 365 TC 6	18.1
	63.9	47 350	1.5	MR 2I 180 - N360TC 365 TC 6	18.0
	65.4	46 250	2.65	MR 2I 200 - N360TC 365 TC 6	17.6
	64.3	46 100	2.8	MR 3I 200 - N320TC 326 TC 4	27.2
	64.1	46 250	3.15	MR 3I 225 - N320TC 326 TC 4	27.3
	71.1	42 550	1.18	MR 2I 160 - N320TC 326 TC 4	24.6
	73.4	41 200	1.5	MR 2I 160 - N360TC 365 TC 6	15.7
	69.0	43 850	1.6	MR 2I 180 - N320TC 326 TC 4	25.4
	72.2	41 900	2.36	MR 2I 200 - N320TC 326 TC 4	24.2
	71.5	42 300	3.15	MR 2I 200 - N360TC 365 TC 6	16.1
	70.1	43 150	3.35	MR 2I 225 - N320TC 326 TC 4	25.0
	77.8	38 900	1.4	MR 2I 160 - N320TC 326 TC 4	22.5
	75.0	40 350	2	MR 2I 180 - N320TC 326 TC 4	23.3
	79.0	38 300	2.8	MR 2I 200 - N320TC 326 TC 4	22.2
	82.7	36 550	3.35	MR 2I 200 - N360TC 365 TC 6	13.9
	76.2	39 700	4	MR 2I 225 - N320TC 326 TC 4	23.0
	84.7	35 750	1.6	MR 2I 160 - N320TC 326 TC 4	20.7
	84.3	35 900	2.24	MR 2I 180 - N320TC 326 TC 4	20.8
	86.0	35 200	3.35	MR 2I 200 - N320TC 326 TC 4	20.3
	87.3	34 650	4.25	MR 2I 225 - N320TC 326 TC 4	20.0
	96.8	31 250	2	MR 2I 160 - N320TC 326 TC 4	18.1
	97.2	31 100	2.24	MR 2I 180 - N320TC 326 TC 4	18.0
	99.5	30 400	4	MR 2I 200 - N320TC 326 TC 4	17.6
	96.9	31 200	5	MR 2I 225 - N320TC 326 TC 4	18.1

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
50	112	27 100	2.24	MR 2I 160 - N320TC 326 TC	4
	105	28 700	2.8	MR 2I 180 - N320TC 326 TC	4
	108	28 100	2.24	MR 2I 180 - N320TC 326 TC	4
	109	27 800	4.25	MR 2I 200 - N320TC 326 TC	4
	112	27 050	5.3	MR 2I 225 - N320TC 326 TC	4
	124	24 300	2.24	MR 2I 160 - N320TC 326 TC	4
	124	24 300	2.5	MR 2I 160 - N360TC 365 TC	6
	122	24 900	3	MR 2I 180 - N320TC 326 TC	4
	126	24 050	4.5	MR 2I 200 - N320TC 326 TC	4
	120	25 300	6	MR 2I 225 - N320TC 326 TC	4
	129	23 500	2.5	MR 2I 160 - N320TC 326 TC	4
	128	23 600	3.35	MR 2I 180 - N320TC 326 TC	4
	135	22 400	5	MR 2I 200 - N320TC 326 TC	4
	137	22 050	6.7	MR 2I 225 - N320TC 326 TC	4
	147	20 550	3	MR 2I 160 - N320TC 326 TC	4
	148	20 450	3.75	MR 2I 180 - N320TC 326 TC	4
	156	19 350	6	MR 2I 200 - N320TC 326 TC	4
	152	19 850	7.5	MR 2I 225 - N320TC 326 TC	4
	170	17 800	3.35	MR 2I 160 - N320TC 326 TC	4
	164	18 450	3.75	MR 2I 180 - N320TC 326 TC	4
	171	17 700	6.3	MR 2I 200 - N320TC 326 TC	4
	176	17 200	8.5	MR 2I 225 - N320TC 326 TC	4
	189	15 950	3.35	MR 2I 160 - N320TC 326 TC	4
	188	16 100	3.75	MR 2I 180 - N320TC 326 TC	4
	198	15 300	7.1	MR 2I 200 - N320TC 326 TC	4
	197	15 350	9	MR 2I 225 - N320TC 326 TC	4
	218	13 900	3.75	MR 2I 160 - N320TC 326 TC	4
	219	13 850	7.5	MR 2I 200 - N320TC 326 TC	4
	273	11 100	3.75	MR 2I 160 - N320TC 326 TC	4
	273	11 100	8.5	MR 2I 200 - N320TC 326 TC	4
60	9.34	380 400	0.8	MR 3I 280 - N400TC 404 TC	6
	9.07	391 800	0.95	MR 3I 320 - N400TC 404 TC	6
	9.07	391 800	1.18	MR 3I 321 - N400TC 404 TC	6
	8.81	403 600	1.6	MR 3I 360 - N400TC 404 TC	6
	11.7	304 300	0.85	MR 3I 250 - N400TC 404 TC	6
	11.5	310 200	1.06	MR 3I 280 - N400TC 404 TC	6
	11.0	323 600	1.4	MR 3I 320 - N400TC 404 TC	6
	11.0	323 600	1.7	MR 3I 321 - N400TC 404 TC	6
	11.2	318 300	2.36	MR 3I 360 - N400TC 404 TC	6
	12.9	275 100	0.95	MR 3I 250 - N400TC 404 TC	6
	12.8	277 200	1.32	MR 3I 280 - N400TC 404 TC	6
	12.8	278 500	1.5	MR 3I 320 - N400TC 404 TC	6
	12.8	278 500	1.9	MR 3I 321 - N400TC 404 TC	6
	12.4	286 500	2.5	MR 3I 360 - N400TC 404 TC	6
	14.0	253 800	0.85	MR 3I 250 - N360TC 364 TC	4
	13.9	255 500	1	MR 3I 250 - N400TC 404 TC	6
	14.2	250 000	1.18	MR 3I 280 - N360TC 364 TC	4
	13.8	257 500	1.4	MR 3I 320 - N360TC 364 TC	4
	13.9	255 000	1.7	MR 3I 320 - N400TC 404 TC	6
	13.8	257 500	1.7	MR 3I 321 - N360TC 364 TC	4
	13.9	255 000	2.12	MR 3I 321 - N400TC 404 TC	6
	13.4	265 200	2.36	MR 3I 360 - N360TC 364 TC	4
	14.2	250 800	2.8	MR 3I 360 - N400TC 404 TC	6
	15.4	231 000	1.12	MR 3I 250 - N400TC 404 TC	6
	15.3	232 700	1.6	MR 3I 280 - N400TC 404 TC	6
	16.2	219 500	1.9	MR 3I 320 - N400TC 404 TC	6
	16.2	219 500	2.36	MR 3I 321 - N400TC 404 TC	6
	15.7	225 700	3.35	MR 3I 360 - N400TC 404 TC	6
	17.8	200 200	0.85	MR 3I 225 - N360TC 364 TC	4
	17.8	200 000	1.25	MR 3I 250 - N360TC 364 TC	4
	17.4	203 800	1.6	MR 3I 280 - N360TC 364 TC	4
	16.7	212 700	2	MR 3I 320 - N360TC 364 TC	4
	16.7	212 700	2.5	MR 3I 321 - N360TC 364 TC	4
	17.0	209 200	3.35	MR 3I 360 - N360TC 364 TC	4

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
60	19.7	180 300	1	MR 3I 225 - N360TC 364 TC	4
	19.7	180 800	1.4	MR 3I 250 - N360TC 364 TC	4
	19.5	182 100	2	MR 3I 280 - N360TC 364 TC	4
	19.4	183 000	2.12	MR 3I 320 - N360TC 364 TC	4
	19.4	183 000	2.65	MR 3I 321 - N360TC 364 TC	4
	18.9	188 300	3.75	MR 3I 360 - N360TC 364 TC	4
	21.2	168 100	1.06	MR 3I 225 - N360TC 364 TC	4
	22.8	156 000	0.95	MR 3I 225 - N360TC 364 TC	4
	21.2	167 900	1.5	MR 3I 250 - N360TC 364 TC	4
	20.8	171 100	1.8	MR 3I 280 - N360TC 364 TC	4
	22.8	156 200	1.8	MR 3I 280 - N360TC 364 TC	4
	21.2	167 600	2.5	MR 3I 320 - N360TC 364 TC	4
	21.2	167 600	3.15	MR 3I 321 - N360TC 364 TC	4
	24.1	147 400	0.85	MR 3I 200 - N360TC 364 TC	4
	23.5	151 400	1.18	MR 3I 225 - N360TC 364 TC	4
	23.4	151 800	1.6	MR 3I 250 - N360TC 364 TC	4
	23.2	152 900	2.36	MR 3I 280 - N360TC 364 TC	4
	24.6	144 200	2.8	MR 3I 320 - N360TC 364 TC	4
	24.6	144 200	3.35	MR 3I 321 - N360TC 364 TC	4
	28.0	127 200	0.95	MR 3I 200 - N360TC 364 TC	4
	28.4	125 300	1.4	MR 3I 225 - N360TC 364 TC	4
	28.4	125 000	1.9	MR 3I 250 - N360TC 364 TC	4
	27.9	127 400	2.5	MR 3I 280 - N360TC 364 TC	4
	26.1	136 300	3	MR 3I 320 - N360TC 364 TC	4
	28.2	125 900	3.55	MR 3I 320 - N400TC 404 TC	6
	26.1	136 300	3.75	MR 3I 321 - N360TC 364 TC	4
	32.3	109 900	1.18	MR 3I 200 - N360TC 364 TC	4
	31.5	112 800	1.6	MR 3I 225 - N360TC 364 TC	4
	31.5	113 000	2.12	MR 3I 250 - N360TC 364 TC	4
	31.2	113 800	3.15	MR 3I 280 - N360TC 364 TC	4
	30.3	117 300	3.35	MR 3I 320 - N360TC 364 TC	4
	33.3	106 800	1.12	MR 3I 200 - N360TC 364 TC	4
	33.8	105 200	1.6	MR 3I 225 - N360TC 364 TC	4
	33.9	104 900	2.24	MR 3I 250 - N360TC 364 TC	4
	33.2	107 000	3	MR 3I 280 - N360TC 364 TC	4
	33.1	107 400	3.75	MR 3I 320 - N360TC 364 TC	4
	38.5	92 250	1.4	MR 3I 200 - N360TC 364 TC	4
	37.5	94 700	1.9	MR 3I 225 - N360TC 364 TC	4
	37.5	94 850	2.65	MR 3I 250 - N360TC 364 TC	4
	40.1	88 750	3	MR 3I 250 - N400TC 404 TC	6
	37.2	95 600	3.35	MR 3I 280 - N360TC 364 TC	4
	47.4	76 500	1.32	MR 2I 200 - N400TC 404 TC	6
	42.1	84 400	1.6	MR 2I 200 - N360TC 364 TC	4
	46.1	78 800	1.8	MR 2I 225 - N400TC 404 TC	6
	43.3	82 050	2.24	MR 3I 225 - N360TC 364 TC	4
	46.0	78 900	2.65	MR 2I 250 - N400TC 404 TC	6
	41.2	86 200	3	MR 3I 250 - N360TC 364 TC	4
	42.5	83 650	3.75	MR 3I 280 - N360TC 364 TC	4
	51.9	69 950	1.6	MR 2I 200 - N400TC 404 TC	6
	50.8	69 950	1.8	MR 3I 200 - N360TC 364 TC	4
	50.1	72 500	2.12	MR 2I 225 - N400TC 404 TC	6
	49.5	71 800	2.5	MR 3I 225 - N360TC 364 TC	4
	47.4	74 950	3.15	MR 3I 250 - N360TC 364 TC	4
	56.5	64 250	1.8	MR 2I 200 - N400TC 404 TC	6
	55.6	63 950	2	MR 3I 200 - N360TC 364 TC	4
	57.4	63 250	2.65	MR 2I 225 - N400TC 404 TC	6
	57.1	62 200	2.65	MR 3I 225 - N360TC 364 TC	4
	52.2	68 150	3.75	MR 3I 250 - N360TC 364 TC	4
	65.4	55 500	2.24	MR 2I 200 - N400TC 404 TC	6
	64.3	55 300	2.36	MR 3I 200 - N360TC 364 TC	4
	63.7	57 000	2.8	MR 2I 225 - N400TC 404 TC	6
	64.1	55 500	2.65	MR 3I 225 - N360TC 364 TC	4
	61.0	58 300	3.75	MR 3I 250 - N360TC 364 TC	4

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
60	71.1	51 050	0.95	MR 2I 160 - N360TC 364 TC	4 24.6
	69.0	52 600	1.4	MR 2I 180 - N360TC 364 TC	4 25.4
	72.2	50 300	2	MR 2I 200 - N360TC 364 TC	4 24.2
	71.5	50 750	2.5	MR 2I 200 - N400TC 404 TC	6 16.1
	70.1	51 800	2.8	MR 2I 225 - N360TC 364 TC	4 25.0
	70.0	51 850	4	MR 2I 250 - N360TC 364 TC	4 25.0
	77.8	46 650	1.18	MR 2I 160 - N360TC 364 TC	4 22.5
	75.0	48 400	1.6	MR 2I 180 - N360TC 364 TC	4 23.3
	79.0	45 950	2.36	MR 2I 200 - N360TC 364 TC	4 22.2
	82.7	43 900	2.8	MR 2I 200 - N400TC 404 TC	6 13.9
	76.2	47 650	3.35	MR 2I 225 - N360TC 364 TC	4 23.0
	84.7	42 850	1.4	MR 2I 160 - N360TC 364 TC	4 20.7
	84.3	43 100	1.8	MR 2I 180 - N360TC 364 TC	4 20.8
	86.0	42 200	2.8	MR 2I 200 - N360TC 364 TC	4 20.3
	87.3	41 600	3.55	MR 2I 225 - N360TC 364 TC	4 20.0
	96.8	37 500	1.7	MR 2I 160 - N360TC 364 TC	4 18.1
	97.2	37 350	1.8	MR 2I 180 - N360TC 364 TC	4 18.0
	99.5	36 450	3.35	MR 2I 200 - N360TC 364 TC	4 17.6
	112	32 500	1.8	MR 2I 160 - N360TC 364 TC	4 15.7
	105	34 450	2.24	MR 2I 180 - N360TC 364 TC	4 16.6
	108	33 700	1.8	MR 2I 180 - N360TC 364 TC	4 16.3
	109	33 350	3.55	MR 2I 200 - N360TC 364 TC	4 16.1
	124	29 150	1.8	MR 2I 160 - N360TC 364 TC	4 14.1
	122	29 850	2.5	MR 2I 180 - N360TC 364 TC	4 14.4
	126	28 850	3.75	MR 2I 200 - N360TC 364 TC	4 13.9
	129	28 150	2	MR 2I 160 - N360TC 364 TC	4 13.6
	128	28 300	2.8	MR 2I 180 - N360TC 364 TC	4 13.6
	135	26 850	4.25	MR 2I 200 - N360TC 364 TC	4 13.0
	147	24 650	2.5	MR 2I 160 - N360TC 364 TC	4 11.9
	148	24 550	3	MR 2I 180 - N360TC 364 TC	4 11.8
	156	23 200	4.75	MR 2I 200 - N360TC 364 TC	4 11.2
	170	21 350	2.8	MR 2I 160 - N360TC 364 TC	4 10.3
	164	22 150	3.15	MR 2I 180 - N360TC 364 TC	4 10.7
	189	19 150	2.8	MR 2I 160 - N360TC 364 TC	4 9.24
	188	19 300	3.15	MR 2I 180 - N360TC 364 TC	4 9.31
	218	16 650	3.15	MR 2I 160 - N360TC 364 TC	4 8.03
	273	13 300	3.15	MR 2I 160 - N360TC 364 TC	4 6.41
75	9.07	489 700	0.8	MR 3I 320 - N400TC 405 TC	6 127
	9.07	489 700	0.95	MR 3I 321 - N400TC 405 TC	6 127
	8.81	504 500	1.32	MR 3I 360 - N400TC 405 TC	6 131
	11.5	387 700	0.85	MR 3I 280 - N400TC 405 TC	6 100
	11.0	404 600	1.12	MR 3I 320 - N400TC 405 TC	6 105
	11.0	404 600	1.4	MR 3I 321 - N400TC 405 TC	6 105
	11.2	397 900	1.9	MR 3I 360 - N400TC 405 TC	6 103
	12.8	346 500	1.06	MR 3I 280 - N400TC 405 TC	6 89.7
	12.8	348 200	1.18	MR 3I 320 - N400TC 405 TC	6 90.1
	12.8	348 200	1.5	MR 3I 321 - N400TC 405 TC	6 90.1
	12.4	358 100	2	MR 3I 360 - N400TC 405 TC	6 92.7
	13.9	319 400	0.8	MR 3I 250 - N400TC 405 TC	6 82.7
	14.2	312 500	0.95	MR 3I 280 - N360TC 365 TC	4 123
	13.8	321 800	1.12	MR 3I 320 - N360TC 365 TC	4 127
	13.9	318 700	1.4	MR 3I 320 - N400TC 405 TC	6 82.5
	13.8	321 800	1.4	MR 3I 321 - N360TC 365 TC	4 127
	13.9	318 700	1.7	MR 3I 321 - N400TC 405 TC	6 82.5
	13.4	331 500	1.9	MR 3I 360 - N360TC 365 TC	4 131
	14.2	313 500	2.24	MR 3I 360 - N400TC 405 TC	6 81.1
	15.4	288 700	0.9	MR 3I 250 - N400TC 405 TC	6 74.7
	15.3	290 900	1.25	MR 3I 280 - N400TC 405 TC	6 75.3
	16.2	274 300	1.5	MR 3I 320 - N400TC 405 TC	6 71.0
	16.2	274 300	1.9	MR 3I 321 - N400TC 405 TC	6 71.0
	15.7	282 200	2.8	MR 3I 360 - N400TC 405 TC	6 73.0

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
75	17.8	250 000	1	MR 3I 250 - N360TC 365 TC	4 98.5
	17.4	254 800	1.25	MR 3I 280 - N360TC 365 TC	4 100
	16.7	265 800	1.6	MR 3I 320 - N360TC 365 TC	4 105
	16.7	265 800	2	MR 3I 321 - N360TC 365 TC	4 105
	17.0	261 500	2.65	MR 3I 360 - N360TC 365 TC	4 103
	19.7	225 300	0.8	MR 3I 225 - N360TC 365 TC	4 88.8
	19.7	226 000	1.12	MR 3I 250 - N360TC 365 TC	4 89.0
	19.5	227 700	1.6	MR 3I 280 - N360TC 365 TC	4 89.7
	19.4	228 800	1.7	MR 3I 320 - N360TC 365 TC	4 90.1
	19.4	228 800	2.12	MR 3I 321 - N360TC 365 TC	4 90.1
	18.9	235 300	3	MR 3I 360 - N360TC 365 TC	4 92.7
	21.2	210 100	0.8	MR 3I 225 - N360TC 365 TC	4 82.7
	21.2	209 900	1.18	MR 3I 250 - N360TC 365 TC	4 82.7
	20.8	213 900	1.5	MR 3I 280 - N360TC 365 TC	4 84.3
	22.8	195 300	1.5	MR 3I 280 - N360TC 365 TC	4 76.9
	21.2	209 500	2	MR 3I 320 - N360TC 365 TC	4 82.5
	21.2	209 500	2.5	MR 3I 321 - N360TC 365 TC	4 82.5
	20.9	212 500	3	MR 3I 360 - N360TC 365 TC	4 83.7
	21.6	206 000	3.35	MR 3I 360 - N360TC 365 TC	4 81.1
	23.5	189 200	0.95	MR 3I 225 - N360TC 365 TC	4 74.5
	23.4	189 700	1.32	MR 3I 250 - N360TC 365 TC	4 74.7
	23.2	191 200	1.9	MR 3I 280 - N360TC 365 TC	4 75.3
	24.6	180 300	2.24	MR 3I 320 - N360TC 365 TC	4 71.0
	24.6	180 300	2.8	MR 3I 321 - N360TC 365 TC	4 71.0
	24.0	185 400	3.55	MR 3I 360 - N360TC 365 TC	4 73.0
	28.4	156 600	1.12	MR 3I 225 - N360TC 365 TC	4 61.7
	28.4	156 200	1.5	MR 3I 250 - N360TC 365 TC	4 61.5
	27.9	159 300	2	MR 3I 280 - N360TC 365 TC	4 62.7
	26.1	170 400	2.5	MR 3I 320 - N360TC 365 TC	4 67.1
	26.1	170 400	3	MR 3I 321 - N360TC 365 TC	4 67.1
	26.5	167 600	4	MR 3I 360 - N360TC 365 TC	4 66.0
	32.3	137 400	0.95	MR 3I 200 - N360TC 365 TC	4 54.1
	31.5	141 000	1.25	MR 3I 225 - N360TC 365 TC	4 55.5
	31.5	141 200	1.7	MR 3I 250 - N360TC 365 TC	4 55.6
	31.2	142 300	2.5	MR 3I 280 - N360TC 365 TC	4 56.0
	30.3	146 600	2.65	MR 3I 320 - N360TC 365 TC	4 57.8
	30.3	146 600	3.35	MR 3I 321 - N360TC 365 TC	4 57.8
	33.3	133 500	0.9	MR 3I 200 - N360TC 365 TC	4 52.6
	33.8	131 500	1.32	MR 3I 225 - N360TC 365 TC	4 51.8
	33.9	131 200	1.8	MR 3I 250 - N360TC 365 TC	4 51.7
	33.2	133 700	2.36	MR 3I 280 - N360TC 365 TC	4 52.7
	33.1	134 200	3.15	MR 3I 320 - N360TC 365 TC	4 52.9
	33.1	134 200	3.75	MR 3I 321 - N360TC 365 TC	4 52.9
	38.5	115 300	1.12	MR 3I 200 - N360TC 365 TC	4 45.4
	37.5	118 400	1.5	MR 3I 225 - N360TC 365 TC	4 46.6
	37.5	118 600	2.12	MR 3I 250 - N360TC 365 TC	4 46.7
	37.2	119 500	2.8	MR 3I 280 - N360TC 365 TC	4 47.1
	38.5	115 500	3.35	MR 3I 320 - N360TC 365 TC	4 45.5
	47.4	95 650	1.06	MR 2I 200 - N400TC 405 TC	6 24.2
	42.1	105 500	1.25	MR 3I 200 - N360TC 365 TC	4 41.5
	46.1	98 500	1.5	MR 2I 225 - N400TC 405 TC	6 25.0
	43.3	102 600	1.8	MR 3I 225 - N360TC 365 TC	4 40.4
	46.0	98 650	2.12	MR 2I 250 - N400TC 405 TC	6 25.0
	41.2	107 800	2.36	MR 3I 250 - N360TC 365 TC	4 42.4
	46.7	97 150	2.8	MR 2I 280 - N400TC 405 TC	6 24.6
	42.5	104 500	3	MR 3I 280 - N360TC 365 TC	4 41.2
	43.0	103 400	4.25	MR 3I 320 - N360TC 365 TC	4 40.7
	51.9	87 400	1.25	MR 2I 200 - N400TC 405 TC	6 22.2
	50.8	87 400	1.4	MR 3I 200 - N360TC 365 TC	4 34.4
	50.1	90 650	1.7	MR 2I 225 - N400TC 405 TC	6 23.0
	49.5	89 750	2	MR 3I 225 - N360TC 365 TC	4 35.4
	52.3	86 750	2.5	MR 2I 250 - N400TC 405 TC	6 22.0
	47.4	93 700	2.65	MR 3I 250 - N360TC 365 TC	4 36.9
	47.1	94 400	3.35	MR 3I 280 - N360TC 365 TC	4 37.2

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
75	56.5	80 300	1.5	MR 2I 200 - N400TC 405 TC	6 20.3
	55.6	79 950	1.6	MR 3I 200 - N360TC 365 TC	4 31.5
	57.4	79 100	2.12	MR 2I 225 - N400TC 405 TC	6 20.0
	57.1	77 750	2.12	MR 3I 225 - N360TC 365 TC	4 30.6
	58.4	77 700	2.8	MR 2I 250 - N400TC 405 TC	6 19.7
	52.2	85 150	3	MR 3I 250 - N360TC 365 TC	4 33.5
	53.8	82 600	3.75	MR 3I 280 - N360TC 365 TC	4 32.5
	65.4	69 400	1.8	MR 2I 200 - N400TC 405 TC	6 17.6
	64.3	69 100	1.9	MR 3I 200 - N360TC 365 TC	4 27.2
	63.7	71 250	2.24	MR 2I 225 - N400TC 405 TC	6 18.1
	64.1	69 350	2.12	MR 3I 225 - N360TC 365 TC	4 27.3
	61.0	72 900	3.15	MR 3I 250 - N360TC 365 TC	4 28.7
	69.0	65 750	1.12	MR 2I 180 - N360TC 365 TC	4 25.4
	72.2	62 850	1.6	MR 2I 200 - N360TC 365 TC	4 24.2
	71.5	63 450	2	MR 2I 200 - N400TC 405 TC	6 16.1
	70.1	64 750	2.24	MR 2I 225 - N360TC 365 TC	4 25.0
	70.0	64 800	3.15	MR 2I 250 - N360TC 365 TC	4 25.0
	77.8	58 350	0.95	MR 2I 160 - N360TC 365 TC	4 22.5
	75.0	60 500	1.32	MR 2I 180 - N360TC 365 TC	4 23.3
	79.0	57 450	1.9	MR 2I 200 - N360TC 365 TC	4 22.2
	82.7	54 850	2.24	MR 2I 200 - N400TC 405 TC	6 13.9
	76.2	59 550	2.65	MR 2I 225 - N360TC 365 TC	4 23.0
	79.6	57 000	3.55	MR 2I 250 - N360TC 365 TC	4 22.0
	84.7	53 600	1.12	MR 2I 160 - N360TC 365 TC	4 20.7
	84.3	53 850	1.5	MR 2I 180 - N360TC 365 TC	4 20.8
	86.0	52 750	2.24	MR 2I 200 - N360TC 365 TC	4 20.3
	87.3	51 950	2.8	MR 2I 225 - N360TC 365 TC	4 20.0
	88.9	51 050	4.25	MR 2I 250 - N360TC 365 TC	4 19.7
	96.8	46 850	1.32	MR 2I 160 - N360TC 365 TC	4 18.1
	97.2	46 650	1.5	MR 2I 180 - N360TC 365 TC	4 18.0
	99.5	45 600	2.65	MR 2I 200 - N360TC 365 TC	4 17.6
	96.9	46 800	3.35	MR 2I 225 - N360TC 365 TC	4 18.1
	112	40 600	1.5	MR 2I 160 - N360TC 365 TC	4 15.7
	105	43 100	1.8	MR 2I 180 - N360TC 365 TC	4 16.6
	108	42 150	1.5	MR 2I 180 - N360TC 365 TC	4 16.3
	109	41 700	2.8	MR 2I 200 - N360TC 365 TC	4 16.1
	112	40 400	3.15	MR 2I 200 - N400TC 405 TC	6 10.2
	112	40 550	3.55	MR 2I 225 - N360TC 365 TC	4 15.6
	124	36 450	1.5	MR 2I 160 - N360TC 365 TC	4 14.1
	122	37 350	2	MR 2I 180 - N360TC 365 TC	4 14.4
	126	36 050	3	MR 2I 200 - N360TC 365 TC	4 13.9
	120	37 900	4	MR 2I 225 - N360TC 365 TC	4 14.6
	129	35 200	1.6	MR 2I 160 - N360TC 365 TC	4 13.6
	128	35 400	2.24	MR 2I 180 - N360TC 365 TC	4 13.6
	135	33 600	3.35	MR 2I 200 - N360TC 365 TC	4 13.0
	147	30 800	2	MR 2I 160 - N360TC 365 TC	4 11.9
	148	30 650	2.5	MR 2I 180 - N360TC 365 TC	4 11.8
	156	29 000	4	MR 2I 200 - N360TC 365 TC	4 11.2
	170	26 700	2.24	MR 2I 160 - N360TC 365 TC	4 10.3
	164	27 700	2.5	MR 2I 180 - N360TC 365 TC	4 10.7
	171	26 550	4.25	MR 2I 200 - N360TC 365 TC	4 10.2
	189	23 950	2.24	MR 2I 160 - N360TC 365 TC	4 9.24
	188	24 150	2.5	MR 2I 180 - N360TC 365 TC	4 9.31
	198	22 950	4.75	MR 2I 200 - N360TC 365 TC	4 8.85
	218	20 850	2.5	MR 2I 160 - N360TC 365 TC	4 8.03
	219	20 750	5	MR 2I 200 - N360TC 365 TC	4 8.01
	273	16 650	2.5	MR 2I 160 - N360TC 365 TC	4 6.41
	273	16 650	5.6	MR 2I 200 - N360TC 365 TC	4 6.42
100	8.81	672 700	1	MR 3I 360 - N440TC 444 TC	6 131
	11.0	539 400	0.85	MR 3I 320 - N440TC 444 TC	6 105
	11.0	539 400	1.06	MR 3I 321 - N440TC 444 TC	6 105
	11.2	530 600	1.4	MR 3I 360 - N440TC 444 TC	6 103

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
100	12.8	461 900	0.8	MR 3I 280 - N440TC 444 TC	6 89.7
	12.8	464 200	0.9	MR 3I 320 - N440TC 444 TC	6 90.1
	12.8	464 200	1.12	MR 3I 321 - N440TC 444 TC	6 90.1
	12.4	477 500	1.5	MR 3I 360 - N440TC 444 TC	6 92.7
	13.8	429 100	0.85	MR 3I 320 - N400TC 405 TC	4 127
	13.9	425 000	1	MR 3I 320 - N440TC 444 TC	6 82.5
	13.8	429 100	1.06	MR 3I 321 - N400TC 405 TC	4 127
	13.9	425 000	1.32	MR 3I 321 - N440TC 444 TC	6 82.5
	13.4	442 000	1.4	MR 3I 360 - N400TC 405 TC	4 131
	14.2	418 000	1.7	MR 3I 360 - N440TC 444 TC	6 81.1
	15.3	387 800	0.95	MR 3I 280 - N440TC 444 TC	6 75.3
	16.2	365 800	1.12	MR 3I 320 - N440TC 444 TC	6 71.0
	16.2	365 800	1.4	MR 3I 321 - N440TC 444 TC	6 71.0
	15.7	376 200	2	MR 3I 360 - N440TC 444 TC	6 73.0
	17.4	339 700	0.95	MR 3I 280 - N400TC 405 TC	4 100
	16.7	354 500	1.18	MR 3I 320 - N400TC 405 TC	4 105
	16.7	354 500	1.5	MR 3I 321 - N400TC 405 TC	4 105
	17.0	348 700	2	MR 3I 360 - N400TC 405 TC	4 103
	19.7	301 300	0.85	MR 3I 250 - N400TC 405 TC	4 89.0
	19.5	303 600	1.18	MR 3I 280 - N400TC 405 TC	4 89.7
	19.4	305 100	1.32	MR 3I 320 - N400TC 405 TC	4 90.1
	19.4	305 100	1.6	MR 3I 321 - N400TC 405 TC	4 90.1
	18.9	313 800	2.24	MR 3I 360 - N400TC 405 TC	4 92.7
	21.2	279 900	0.85	MR 3I 250 - N400TC 405 TC	4 82.7
	20.8	285 200	1.12	MR 3I 280 - N400TC 405 TC	4 84.3
	22.8	260 400	1.12	MR 3I 280 - N400TC 405 TC	4 76.9
	21.2	279 300	1.5	MR 3I 320 - N400TC 405 TC	4 82.5
	21.2	279 300	1.9	MR 3I 321 - N400TC 405 TC	4 82.5
	20.9	283 300	2.24	MR 3I 360 - N400TC 405 TC	4 83.7
	21.6	274 700	2.5	MR 3I 360 - N400TC 405 TC	4 81.1
	23.4	252 900	1	MR 3I 250 - N400TC 405 TC	4 74.7
	23.2	254 900	1.4	MR 3I 280 - N400TC 405 TC	4 75.3
	24.6	240 400	1.7	MR 3I 320 - N400TC 405 TC	4 71.0
	24.6	240 400	2.12	MR 3I 321 - N400TC 405 TC	4 71.0
	24.0	247 200	2.65	MR 3I 360 - N400TC 405 TC	4 73.0
	28.4	208 300	1.18	MR 3I 250 - N400TC 405 TC	4 61.5
	27.9	212 300	1.5	MR 3I 280 - N400TC 405 TC	4 62.7
	26.1	227 200	1.8	MR 3I 320 - N400TC 405 TC	4 67.1
	26.1	227 200	2.24	MR 3I 321 - N400TC 405 TC	4 67.1
	26.5	223 400	3	MR 3I 360 - N400TC 405 TC	4 66.0
	31.5	188 300	1.32	MR 3I 250 - N400TC 405 TC	4 55.6
	31.2	189 700	1.8	MR 3I 280 - N400TC 405 TC	4 56.0
	30.3	195 500	2	MR 3I 320 - N400TC 405 TC	4 57.8
	30.3	195 500	2.5	MR 3I 321 - N400TC 405 TC	4 57.8
	29.5	201 100	3.15	MR 3I 360 - N400TC 405 TC	4 59.4
	33.9	174 900	1.4	MR 3I 250 - N400TC 405 TC	4 51.7
	33.2	178 300	1.7	MR 3I 280 - N400TC 405 TC	4 52.7
	33.1	179 000	2.36	MR 3I 320 - N400TC 405 TC	4 52.9
	33.1	179 000	2.8	MR 3I 321 - N400TC 405 TC	4 52.9
	33.7	176 000	3.75	MR 3I 360 - N400TC 405 TC	4 52.0
	37.5	158 100	1.5	MR 3I 250 - N400TC 405 TC	4 46.7
	40.1	147 900	1.8	MR 3I 280 - N440TC 444 TC	6 28.7
	37.2	159 300	2	MR 3I 320 - N400TC 405 TC	4 47.1
	38.5	154 000	2.65	MR 3I 320 - N400TC 405 TC	4 45.5
	38.5	154 000	3.15	MR 3I 321 - N400TC 405 TC	4 45.5
	46.0	131 500	1.6	MR 2I 250 - N440TC 444 TC	6 25.0
	41.2	143 700	1.8	MR 3I 250 - N400TC 405 TC	4 42.4
	46.7	129 500	2.12	MR 2I 280 - N440TC 444 TC	6 24.6
	42.5	139 400	2.24	MR 3I 280 - N400TC 405 TC	4 41.2
	46.0	131 500	2.65	MR 2I 320 - N440TC 444 TC	6 25.0
	43.0	137 900	3.15	MR 3I 320 - N400TC 405 TC	4 40.7
	43.0	137 900	3.75	MR 3I 321 - N400TC 405 TC	4 40.7

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
100	52.3	115 700	1.8	MR 2I 250 - N440TC 444 TC	6 22.0
	47.4	124 900	1.9	MR 3I 250 - N400TC 405 TC	4 36.9
	51.9	116 600	2.65	MR 2I 280 - N440TC 444 TC	6 22.2
	47.1	125 900	2.5	MR 3I 280 - N400TC 405 TC	4 37.2
	50.3	120 200	3	MR 2I 320 - N440TC 444 TC	6 22.8
	46.8	126 500	3.15	MR 3I 320 - N400TC 405 TC	4 37.4
	46.8	126 500	4	MR 3I 321 - N440TC 444 TC	4 37.4
	58.4	103 600	2.12	MR 2I 250 - N440TC 444 TC	6 19.7
	52.2	113 600	2.24	MR 3I 250 - N400TC 405 TC	4 33.5
	57.3	105 600	2.8	MR 2I 280 - N440TC 444 TC	6 20.1
	53.8	110 200	2.8	MR 3I 280 - N400TC 405 TC	4 32.5
	52.3	113 300	3.75	MR 3I 320 - N400TC 405 TC	4 33.5
	64.6	93 650	2.36	MR 2I 250 - N440TC 444 TC	6 17.8
	61.0	97 200	2.36	MR 3I 250 - N400TC 405 TC	4 28.7
	60.7	97 600	3	MR 3I 280 - N400TC 405 TC	4 28.8
	58.3	101 700	4.25	MR 3I 320 - N400TC 405 TC	4 30.0
	72.2	83 800	1.18	MR 2I 200 - N400TC 405 TC	4 24.2
	70.1	86 300	1.7	MR 2I 225 - N400TC 405 TC	4 25.0
	70.0	86 400	2.36	MR 2I 250 - N400TC 405 TC	4 25.0
	71.1	85 100	3.15	MR 2I 280 - N400TC 405 TC	4 24.6
	79.0	76 600	1.4	MR 2I 200 - N400TC 405 TC	4 22.2
	76.2	79 450	2	MR 2I 225 - N400TC 405 TC	4 23.0
	79.6	76 050	2.8	MR 2I 250 - N400TC 405 TC	4 22.0
	79.0	76 600	3.75	MR 2I 280 - N400TC 405 TC	4 22.2
	86.0	70 350	1.7	MR 2I 200 - N400TC 405 TC	4 20.3
	87.3	69 300	2.12	MR 2I 225 - N400TC 405 TC	4 20.0
	88.9	68 100	3.15	MR 2I 250 - N400TC 405 TC	4 19.7
	99.5	60 800	2	MR 2I 200 - N400TC 405 TC	4 17.6
	96.9	62 400	2.5	MR 2I 225 - N400TC 405 TC	4 18.1
	98.3	61 550	3.55	MR 2I 250 - N400TC 405 TC	4 17.8
	109	55 600	2.12	MR 2I 200 - N400TC 405 TC	4 16.1
	112	54 050	2.65	MR 2I 225 - N400TC 405 TC	4 15.6
	108	55 950	4	MR 2I 250 - N400TC 405 TC	4 16.2
	126	48 050	2.24	MR 2I 200 - N400TC 405 TC	4 13.9
	120	50 550	3	MR 2I 225 - N400TC 405 TC	4 14.6
	120	50 450	4	MR 2I 250 - N400TC 405 TC	4 14.6
	135	44 800	2.5	MR 2I 200 - N400TC 405 TC	4 13.0
	137	44 100	3.35	MR 2I 225 - N400TC 405 TC	4 12.8
	156	38 700	3	MR 2I 200 - N400TC 405 TC	4 11.2
	152	39 700	3.75	MR 2I 225 - N400TC 405 TC	4 11.5
	171	35 400	3.15	MR 2I 200 - N400TC 405 TC	4 10.2
	198	30 600	3.55	MR 2I 200 - N400TC 405 TC	4 8.85
	219	27 700	3.75	MR 2I 200 - N400TC 405 TC	4 8.01
	273	22 200	4.25	MR 2I 200 - N400TC 405 TC	4 6.42
125	8.81	840 800	0.8	MR 3I 360 - N440TC 445 TC	6 131
	11.0	674 300	0.85	MR 3I 321 - N440TC 445 TC	6 105
	11.2	663 200	1.12	MR 3I 360 - N440TC 445 TC	6 103
	12.8	580 300	0.9	MR 3I 321 - N440TC 445 TC	6 90.1
	12.4	596 900	1.18	MR 3I 360 - N440TC 445 TC	6 92.7
	13.9	531 200	0.8	MR 3I 320 - N440TC 445 TC	6 82.5
	13.8	536 400	0.85	MR 3I 321 - N440TC 444 TC	4 127
	13.9	531 200	1	MR 3I 321 - N440TC 445 TC	6 82.5
	13.4	552 600	1.12	MR 3I 360 - N440TC 444 TC	4 131
	14.2	522 500	1.4	MR 3I 360 - N440TC 445 TC	6 81.1
	16.2	457 200	0.9	MR 3I 320 - N440TC 445 TC	6 71.0
	16.2	457 200	1.12	MR 3I 321 - N440TC 445 TC	6 71.0
	15.7	470 300	1.6	MR 3I 360 - N440TC 445 TC	6 73.0
	18.3	403 900	0.8	MR 3I 280 - N440TC 445 TC	6 62.7
	16.7	443 100	0.95	MR 3I 320 - N440TC 444 TC	4 105
	16.7	443 100	1.18	MR 3I 321 - N440TC 444 TC	4 105
	17.0	435 800	1.6	MR 3I 360 - N440TC 444 TC	4 103

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
125	19.5	379 500	0.95	MR 3I 280 - N440TC 444 TC	4 89.7
	19.4	381 300	1.06	MR 3I 320 - N440TC 444 TC	4 90.1
	19.4	381 300	1.32	MR 3I 321 - N440TC 444 TC	4 90.1
	18.9	392 200	1.8	MR 3I 360 - N440TC 444 TC	4 92.7
	20.8	356 500	0.9	MR 3I 280 - N440TC 444 TC	4 84.3
	22.8	325 500	0.9	MR 3I 280 - N440TC 444 TC	4 76.9
	21.2	349 100	1.18	MR 3I 320 - N440TC 444 TC	4 82.5
	21.2	349 100	1.5	MR 3I 321 - N440TC 444 TC	4 82.5
	20.9	354 100	1.8	MR 3I 360 - N440TC 444 TC	4 83.7
	21.6	343 400	2	MR 3I 360 - N440TC 444 TC	4 81.1
	23.4	316 200	0.8	MR 3I 250 - N440TC 444 TC	4 74.7
	23.2	318 600	1.12	MR 3I 280 - N440TC 444 TC	4 75.3
	24.6	300 500	1.32	MR 3I 320 - N440TC 444 TC	4 71.0
	24.6	300 500	1.6	MR 3I 321 - N440TC 444 TC	4 71.0
	24.0	309 000	2.12	MR 3I 360 - N440TC 444 TC	4 73.0
	28.4	260 400	0.95	MR 3I 250 - N440TC 444 TC	4 61.5
	27.9	265 400	1.18	MR 3I 280 - N440TC 444 TC	4 62.7
	26.1	283 900	1.5	MR 3I 320 - N440TC 444 TC	4 67.1
	26.1	283 900	1.8	MR 3I 321 - N440TC 444 TC	4 67.1
	26.5	279 300	2.5	MR 3I 360 - N440TC 444 TC	4 66.0
	31.5	235 400	1.06	MR 3I 250 - N440TC 444 TC	4 55.6
	31.2	237 200	1.5	MR 3I 280 - N440TC 444 TC	4 56.0
	30.3	244 400	1.6	MR 3I 320 - N440TC 444 TC	4 57.8
	30.3	244 400	2	MR 3I 321 - N440TC 444 TC	4 57.8
	29.5	251 400	2.5	MR 3I 360 - N440TC 444 TC	4 59.4
	33.9	218 600	1.12	MR 3I 250 - N440TC 444 TC	4 51.7
	33.2	222 800	1.4	MR 3I 280 - N440TC 444 TC	4 52.7
	33.1	223 700	1.8	MR 3I 320 - N440TC 444 TC	4 52.9
	33.1	223 700	2.36	MR 3I 321 - N440TC 444 TC	4 52.9
	33.7	220 000	3	MR 3I 360 - N440TC 444 TC	4 52.0
	37.5	197 600	1.25	MR 3I 250 - N440TC 444 TC	4 46.7
	37.2	199 100	1.6	MR 3I 280 - N440TC 444 TC	4 47.1
	38.5	192 500	2.12	MR 3I 320 - N440TC 444 TC	4 45.5
	38.5	192 500	2.5	MR 3I 321 - N440TC 444 TC	4 45.5
	37.4	198 000	3.15	MR 3I 360 - N440TC 444 TC	4 46.8
	46.0	164 400	1.25	MR 2I 250 - N440TC 445 TC	6 25.0
	41.2	179 600	1.4	MR 3I 250 - N440TC 444 TC	4 42.4
	42.5	174 200	1.8	MR 3I 280 - N440TC 444 TC	4 41.2
	43.0	172 400	2.5	MR 3I 320 - N440TC 444 TC	4 40.7
	43.0	172 400	3	MR 3I 321 - N440TC 444 TC	4 40.7
	41.4	178 800	3.55	MR 3I 360 - N440TC 444 TC	4 42.3
	52.3	144 600	1.5	MR 2I 250 - N440TC 445 TC	6 22.0
	47.4	156 200	1.6	MR 3I 250 - N440TC 444 TC	4 36.9
	51.9	145 700	2.12	MR 2I 280 - N440TC 445 TC	6 22.2
	47.1	157 400	2	MR 3I 280 - N440TC 444 TC	4 37.2
	50.3	150 200	2.36	MR 2I 320 - N440TC 445 TC	6 22.8
	46.8	158 200	2.5	MR 3I 320 - N440TC 444 TC	4 37.4
	50.3	150 200	3	MR 2I 321 - N440TC 445 TC	6 22.8
	46.8	158 200	3.15	MR 3I 321 - N440TC 444 TC	4 37.4
	45.5	162 700	3.75	MR 3I 360 - N440TC 444 TC	4 38.4
	58.4	129 500	1.7	MR 2I 250 - N440TC 445 TC	6 19.7
	52.2	141 900	1.8	MR 3I 250 - N440TC 444 TC	4 33.5
	57.3	132 000	2.24	MR 2I 280 - N440TC 445 TC	6 20.1
	53.8	137 700	2.24	MR 3I 280 - N440TC 444 TC	4 32.5
	55.7	135 800	3	MR 2I 320 - N440TC 445 TC	6 20.6
	52.3	141 600	3.15	MR 3I 320 - N440TC 444 TC	4 33.5
	64.6	117 100	1.9	MR 2I 250 - N440TC 445 TC	6 17.8
	61.0	121 500	1.9	MR 3I 250 - N440TC 444 TC	4 28.7
	64.1	117 900	2.65	MR 2I 280 - N440TC 445 TC	6 17.9
	60.7	122 000	2.36	MR 3I 280 - N440TC 444 TC	4 28.8
	58.3	127 100	3.35	MR 3I 320 - N440TC 444 TC	4 30.0
	70.0	108 000	1.9	MR 2I 250 - N440TC 444 TC	4 25.0
	71.1	106 400	2.65	MR 2I 280 - N440TC 444 TC	4 24.6
	70.0	108 000	3.15	MR 2I 320 - N440TC 444 TC	4 25.0
	79.6	95 050	2.12	MR 2I 250 - N440TC 444 TC	4 22.0
	79.0	95 750	3	MR 2I 280 - N440TC 444 TC	4 22.2
	76.6	98 750	3.55	MR 2I 320 - N440TC 444 TC	4 22.8

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
125	88.9	85 100	2.5	MR 2I 250 - N440TC 444 TC	4 19.7
	87.2	86 750	3.35	MR 2I 280 - N440TC 444 TC	4 20.1
	98.3	76 900	2.8	MR 2I 250 - N440TC 444 TC	4 17.8
	97.6	77 500	4	MR 2I 280 - N440TC 444 TC	4 17.9
	108	69 900	3.15	MR 2I 250 - N440TC 444 TC	4 16.2
	120	63 050	3.15	MR 2I 250 - N440TC 444 TC	4 14.6
	134	56 450	3.75	MR 2I 250 - N440TC 444 TC	4 13.1
	148	51 050	4.25	MR 2I 250 - N440TC 444 TC	4 11.8
150	13.4	663 100	0.95	MR 3I 360 - N440TC 445 TC	4 131
	16.7	531 700	0.8	MR 3I 320 - N440TC 445 TC	4 105
	16.7	531 700	1	MR 3I 321 - N440TC 445 TC	4 105
	17.0	523 000	1.32	MR 3I 360 - N440TC 445 TC	4 103
	19.5	455 300	0.8	MR 3I 280 - N440TC 445 TC	4 89.7
	19.4	457 600	0.85	MR 3I 320 - N440TC 445 TC	4 90.1
	19.4	457 600	1.06	MR 3I 321 - N440TC 445 TC	4 90.1
	18.9	470 700	1.5	MR 3I 360 - N440TC 445 TC	4 92.7
	21.2	418 900	1	MR 3I 320 - N440TC 445 TC	4 82.5
	21.2	418 900	1.25	MR 3I 321 - N440TC 445 TC	4 82.5
	20.9	424 900	1.5	MR 3I 360 - N440TC 445 TC	4 83.7
	21.6	412 000	1.7	MR 3I 360 - N440TC 445 TC	4 81.1
	23.2	382 300	0.95	MR 3I 280 - N440TC 445 TC	4 75.3
	24.6	360 500	1.12	MR 3I 320 - N440TC 445 TC	4 71.0
	24.6	360 500	1.4	MR 3I 321 - N440TC 445 TC	4 71.0
	24.0	370 800	1.8	MR 3I 360 - N440TC 445 TC	4 73.0
	27.9	318 500	1	MR 3I 280 - N440TC 445 TC	4 62.7
	26.1	340 700	1.25	MR 3I 320 - N440TC 445 TC	4 67.1
	26.1	340 700	1.5	MR 3I 321 - N440TC 445 TC	4 67.1
	26.5	335 200	2	MR 3I 360 - N440TC 445 TC	4 66.0
	31.5	282 400	0.85	MR 3I 250 - N440TC 445 TC	4 55.6
	31.2	284 600	1.25	MR 3I 280 - N440TC 445 TC	4 56.0
	30.3	293 300	1.32	MR 3I 320 - N440TC 445 TC	4 57.8
	30.3	293 300	1.7	MR 3I 321 - N440TC 445 TC	4 57.8
	29.5	301 600	2.12	MR 3I 360 - N440TC 445 TC	4 59.4
	33.9	262 400	0.9	MR 3I 250 - N440TC 445 TC	4 51.7
	33.2	267 400	1.18	MR 3I 280 - N440TC 445 TC	4 52.7
	33.1	268 500	1.5	MR 3I 320 - N440TC 445 TC	4 52.9
	33.1	268 500	1.9	MR 3I 321 - N440TC 445 TC	4 52.9
	33.7	264 100	2.5	MR 3I 360 - N440TC 445 TC	4 52.0
	37.5	237 100	1.06	MR 3I 250 - N440TC 445 TC	4 46.7
	37.2	238 900	1.4	MR 3I 280 - N440TC 445 TC	4 47.1
	38.5	231 100	1.7	MR 3I 320 - N440TC 445 TC	4 45.5
	38.5	231 100	2.12	MR 3I 321 - N440TC 445 TC	4 45.5
	37.4	237 700	2.65	MR 3I 360 - N440TC 445 TC	4 46.8
	41.2	215 500	1.18	MR 3I 250 - N440TC 445 TC	4 42.4
	42.5	209 100	1.5	MR 3I 280 - N440TC 445 TC	4 41.2
	43.0	206 800	2.12	MR 3I 320 - N440TC 445 TC	4 40.7
	43.0	206 800	2.5	MR 3I 321 - N440TC 445 TC	4 40.7
	41.4	214 500	3	MR 3I 360 - N440TC 445 TC	4 42.3
	47.4	187 400	1.32	MR 3I 250 - N440TC 445 TC	4 36.9
	47.1	188 800	1.6	MR 3I 280 - N440TC 445 TC	4 37.2
	46.8	189 800	2.12	MR 3I 320 - N440TC 445 TC	4 37.4
	46.8	189 800	2.65	MR 3I 321 - N440TC 445 TC	4 37.4
	45.5	195 200	3.15	MR 3I 360 - N440TC 445 TC	4 38.4
	52.2	170 300	1.5	MR 3I 250 - N440TC 445 TC	4 33.5
	53.8	165 200	1.9	MR 3I 280 - N440TC 445 TC	4 32.5
	52.3	169 900	2.5	MR 3I 320 - N440TC 445 TC	4 33.5
	52.3	169 900	2.8	MR 3I 321 - N440TC 445 TC	4 33.5
	50.4	176 200	3.55	MR 3I 360 - N440TC 445 TC	4 34.7
	61.0	145 800	1.5	MR 3I 250 - N440TC 445 TC	4 28.7
	60.7	146 400	2	MR 3I 280 - N440TC 445 TC	4 28.8
	58.3	152 500	2.8	MR 3I 320 - N440TC 445 TC	4 30.0
	58.3	152 500	3.15	MR 3I 321 - N440TC 445 TC	4 30.0
	57.8	153 600	4	MR 3I 360 - N440TC 445 TC	4 30.3


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s	 2)	Gear ratio i
150	70.0	129 600	1.6	MR 2I 250 - N440TC 445 TC	4 25.0
	71.1	127 700	2.12	MR 2I 280 - N440TC 445 TC	4 24.6
	70.0	129 600	2.65	MR 2I 320 - N440TC 445 TC	4 25.0
	70.0	129 600	3.35	MR 2I 321 - N440TC 445 TC	4 25.0
	68.0	133 500	4.5	MR 2I 360 - N440TC 445 TC	4 25.7
	79.6	114 000	1.8	MR 2I 250 - N440TC 445 TC	4 22.0
	79.0	114 900	2.5	MR 2I 280 - N440TC 445 TC	4 22.2
	76.6	118 500	3	MR 2I 320 - N440TC 445 TC	4 22.8
	76.6	118 500	3.75	MR 2I 321 - N440TC 445 TC	4 22.8
	74.9	121 100	5	MR 2I 360 - N440TC 445 TC	4 23.4
	88.9	102 100	2.12	MR 2I 250 - N440TC 445 TC	4 19.7
	87.2	104 100	2.8	MR 2I 280 - N440TC 445 TC	4 20.1
	84.8	107 100	3.55	MR 2I 320 - N440TC 445 TC	4 20.6
	84.8	107 100	4.75	MR 2I 321 - N440TC 445 TC	4 20.6
	98.3	92 300	2.36	MR 2I 250 - N440TC 445 TC	4 17.8
	97.6	93 000	3.15	MR 2I 280 - N440TC 445 TC	4 17.9
	98.5	92 150	4.25	MR 2I 320 - N440TC 445 TC	4 17.8
	108	83 900	2.65	MR 2I 250 - N440TC 445 TC	4 16.2
	112	81 400	3.55	MR 2I 280 - N440TC 445 TC	4 15.7
	110	82 500	5	MR 2I 320 - N440TC 445 TC	4 15.9
	120	75 650	2.65	MR 2I 250 - N440TC 445 TC	4 14.6
	119	76 250	3.55	MR 2I 280 - N440TC 445 TC	4 14.7
	134	67 750	3.15	MR 2I 250 - N440TC 445 TC	4 13.1
	131	69 050	4.25	MR 2I 280 - N440TC 445 TC	4 13.3
	148	61 250	3.55	MR 2I 250 - N440TC 445 TC	4 11.8
	147	61 700	4.75	MR 2I 280 - N440TC 445 TC	4 11.9
	163	55 650	3.75	MR 2I 250 - N440TC 445 TC	4 10.7
	168	54 000	5.6	MR 2I 280 - N440TC 445 TC	4 10.4
	190	47 650	4.5	MR 2I 250 - N440TC 445 TC	4 9.19
	190	47 850	6	MR 2I 280 - N440TC 445 TC	4 9.22

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.
2) For complete design see ch. 3.1.

Gearmotors MR 2I

Dimensions

MR 2I 140 ... 360

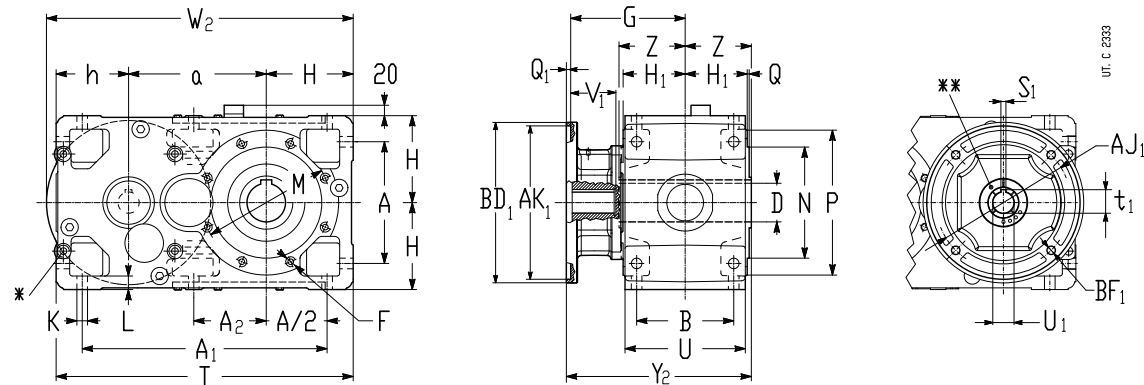

																						NEMA C-Face input side											
Gear red.	Size	a	A	A1	A2	B	D	F	G	H	H1	h	K	L	M	N	P	Q	T	U	Z	U1	V1	S1	t1	BF1	AJ1	AK1	BD1	Q1	Y2	W2	Mass
	NEMA motor frame						Ø			h11	h12	h11	Ø		Ø	Ø	Ø					Ø	in	in	in	in	in	in	in	in			
							in		1)														4)		5)				6)				
140	N210TC N250TC N280TC	240	212	427	127	162	2.75	3)	196.5 196.5 196.5	150	103.5	125	18	23	265	230	300	4	515	201	125	1.375 1.625 1.875	3.125 3.750 4.375	0.313 0.375 0.500	1.518 1.796 2.017 ⁷⁾	0.551 0.551 0.551	7.25 7.25 9	8.5 8.5 10.5	9.055 9.055 11.024	0.217 0.217 0.217	327 327 327	505 505 530	275 275 275
160	N250TC N280TC N320TC N360TC	285	252	507	150*	201	3.25	M16	217.5 232.5 240.5 240.5	180	128.5	150	22	28	265	230	300	4	615	249	136	1.625 1.875 2.125 2.375	3.750 4.375 5.000 5.625	0.375 0.500 0.500 0.625	1.796 2.096 2.350 2.553 ⁷⁾	0.551 0.551 0.689 0.689	7.25 9 12.5 11	8.5 10.5 12.5 12.5	9.055 11.024 13.071 13.071	0.217 0.217 0.217 0.217	359 374 382 382	580 605 631 631	420 425 430 430
180	N280TC N320TC N360TC	305	252	527	170	201	3.625	M16	232.5 240.5 240.5	180	128.5	150	22	28	300	250	350	5	635	249	150	1.875 2.125 2.375	4.375 5.000 5.625	0.500 0.500 0.625	2.096 2.350 2.553 ⁷⁾	0.551 0.689 0.689	9 11 11	10.5 12.5 12.5	11.024 13.071 13.071	0.217 0.217 0.217	388 396 396	625 651 651	470 475 475
200	N280TC N320TC N360TC N400TC	360	320	635	198*	250	4	3)	262 285 303 303	225	158	180	27	34	350	300	400	5	765	307	167	1.875 2.125 2.375 2.875	4.375 5.000 5.625 7	0.500 0.500 0.625 0.75	2.096 2.350 2.553 ⁷⁾ 3.107 ⁷⁾	0.551 0.689 0.689 0.689	9 11 11 11	10.5 12.5 12.5 12.5	11.250 13.071 13.071 13.071	0.217 0.217 0.217 0.217	435 458 476 476	728 751 751 751	715 720 725 725
225	N320TC N360TC N400TC	385	320	660	223	250	4.25	M20	285 303 303	225	158	180	27	34	400	350	450	5	790	307	180	2.125 2.375 2.875	5.000 5.625 7	0.500 0.625 0.75	2.350 2.553 ⁷⁾ 3.107 ⁷⁾	0.689 0.689 0.689	11 11 11	12.5 12.5 12.5	13.071 13.071 13.071	0.217 0.217 0.217	471 489 489	776 776 776	785 790 790
250	N360TC N400TC N440TC	450	396	791	-	310	5	3)	345 345 425	280	195	225	33	42	500	450	550	5	955	380	206	2.375 2.875 3.375	5.625 7 8.25	0.625 0.75 0.875	2.651 3.205 3.76	0.689 0.689 0.689	11 11 14	12.5 12.5 16	14 14 18	0.217 0.217 0.217	557 557 637	908 908 959	1255 1255 1295
280	N400TC N440TC	480	396	821	277	310	5.5	M24	345 425	280	195	225	33	42	500	450	550	5	985	380	222	2.875 3.375	7 8.25	0.75 0.875	3.205 3.76	0.689 0.689	11 14	12.5 16	14 18	0.217 0.217	573 653	938 989	1375 1415
320 321	N440TC	570	510	1005	-	386	6.25	3)	427	355	241	280	39	52	600	550	660	6	1205	470	254	3.375	8.25	0.875	3.76	0.689	14	16	18	0.217	687	1154	2230
360	N440TC	610	510	1045	358	386	7	M30	427	355	241	280	39	52	600	550	660	6	1245	470	273	3.375	8.25	0.875	3.76	0.689	14	16	18	0.217	706	1194	2440

*Machined surface and N. 4 threaded holes (dimensions in ch. 3.5 «Input face») on opposite side (not in view) too.

** With motor size ≥ N320TC, input hollow shaft with longitudinal cuts, hub clamp and key.

1) Working length of thread 2 · F.

3) For dimension, number and angular position see ch. 3.5.

4) Tolerance +0.0004/+0.001 in (+0.009/+0.025 mm) for motors size ≤ N280TC, 0/+0.0007 in (0/+0.019 mm) for N320TC, N360TC, N400TC, 0/+0.0009 in (0/+0.022 mm) for N440TC.

5) Tolerance 0/+0.0014 in (0/+0.036 mm) for N210TC and N250TC, 0/+0.0017 in (0/+0.043 mm) for N280TC, N320TC, N360TC, 0/+0.002 in (0/+0.052 mm) for N400TC and N440TC.


6) Tolerance -0.0007/+0.0007 in (-0.017/+0.017 mm), -0.0011/+0.0011 in (-0.028/+0.028 mm) for motors size ≥ N320TC.

7) Out of standard dimension; a key properly modified is supplied together with the gearmotor.



Designs (direction of rotation)

MR 2I 140 ... 360




● Position of reference groove (see ch. 3) for radial load verification.

Mounting positions

Unless otherwise stated, gearmotors are supplied in mounting position **B3** (see ch. 2).

MR 2I 140 ... 360

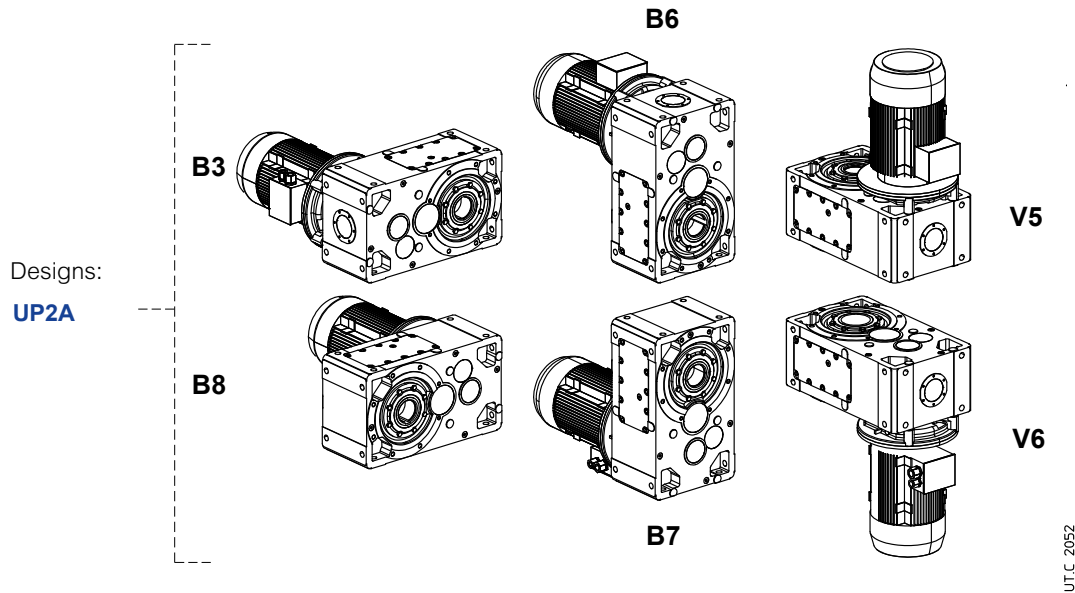


Oil quantity MR 2I 140 ... 360

Stated oil quantities [gal] are approximate for provisioning. The exact oil quantity the gearmotor is to be filled with is defined by the level plug.

Mounting position	140	160	180	200	225	250	280	320, 321	360
B3	1.7	3.2	3.4	6.6	6.9	12	13	26	26
B8	1.7	3.2	3.4	6.6	6.9	12	13	26	26
B6	2.6	4.8	5	9.2	9.8	18	19	36	37
B7	2.6	4.8	5	9.2	9.8	18	19	36	37
V5	2.6	4.8	5	9.2	9.8	18	19	36	37
V6	2.6	4.8	5	9.2	9.8	18	19	36	37

Lubrication details

MR 2I 140 ... 360

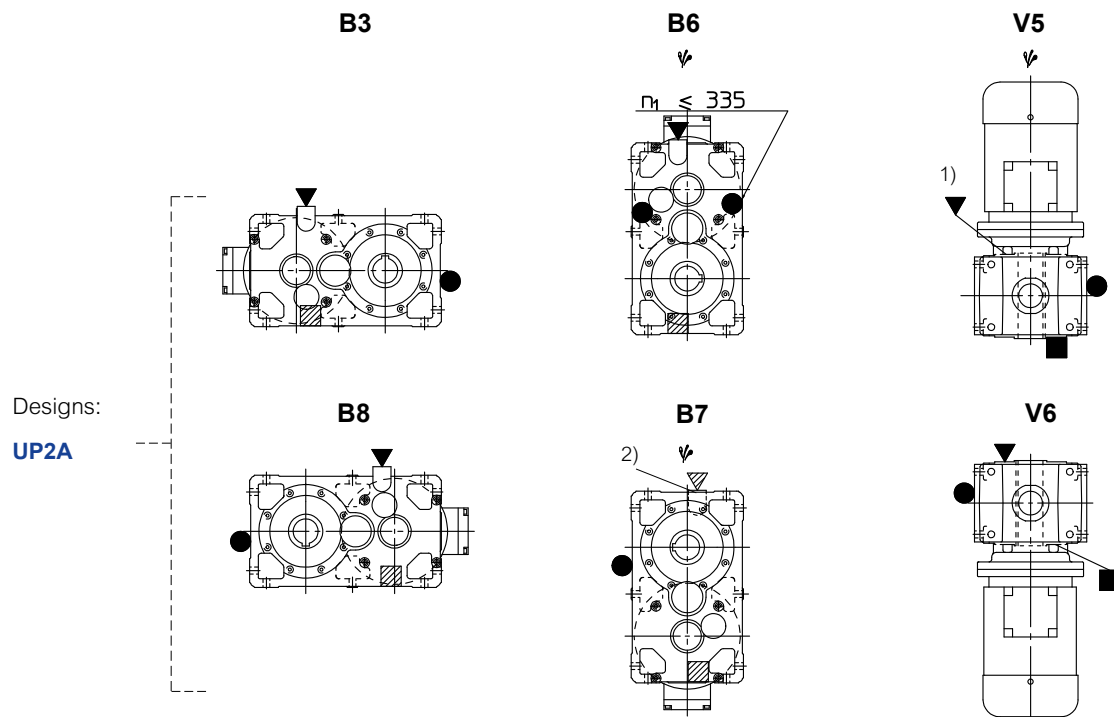

1) Oil filler plug possible even on low speed shaft side.

2) Oil filler plug possible even on opposite side.

ψ Possible high oil splash: for the corrective factor f_{t3} of nominal thermal power P_{tN} see ch. 3.




oil filler plug
oil level plug
oil drain plug
oil filler plug with oil level dip stick

oil filler plug on opposite side (not in view)
oil level plug on opposite side (not in view)
oil drain plug on opposite side (not in view)

Gearmotors MR 3I

Dimensions MR 3I 140 ... 360

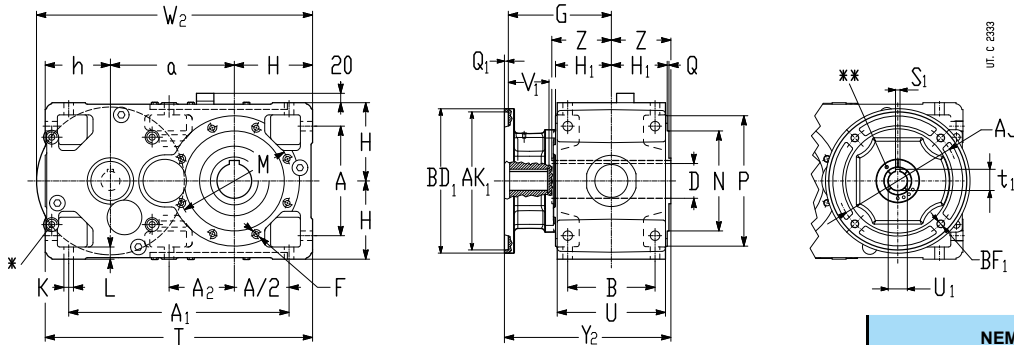

A ₁											U											Y ₂											NEMA C-Face input side												
Gear red.	Size NEMA motor frame	a	A	A1	A2	B	D Ø	F	G	H	H1	h	K Ø	L	M Ø	N Ø	P Ø	Q	T	U	Z	U1 Ø	V1 Ø	S1 Ø	t1 Ø	BF1 Ø	AJ1 Ø	AK1 Ø	BD1 Ø	Q1 Ø	Y2	W2	Mass												
							in				h11	h12	h11			Ø	Ø						in	in	in	in	in	in	in	in															
																	h6							in	in	in	in	in	in	in	in														
		4)							1)															5)					6)																
140	N180TC	240	212	427	127	162	2.75	3)	196.5	150	103.5	125	18	23	265	230	300	4	515	201	125	1.125	2.620	0.250	1.241	0.551	7.25	8.5	9.055	0.217	327	505	270												
	N210TC								196.5													1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	327	505	270												
	N250TC								216.5													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	347	505	275												
	N280TC																					1.875	4.375	0.500	2.096	0.551	9	10.5	11.024	0.217	374	605	425												
160	N180TC	285	252	507	150*	201	3.25	M16	217.5	180	128.5	150	22	28	265	230	300	4	615	249	136	1.125	2.620	0.250	1.241	0.551	7.25	8.5	9.055	0.217	359	580	420												
	N210TC								217.5													1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	359	580	420												
	N250TC								217.5													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	359	580	420												
	N280TC								232.5													1.875	4.375	0.500	2.096	0.551	9	10.5	11.024	0.217	388	625	470												
180	N180TC	305	252	527	170	201	3.625	M16	217.5	180	128.5	150	22	28	300	250	350	5	635	249	150	1.125	2.620	0.250	1.241	0.551	7.25	8.5	9.055	0.217	373	600	465												
	N210TC								217.5													1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	373	600	465												
	N250TC								217.5													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	373	600	465												
	N280TC								232.5													1.875	4.375	0.500	2.096	0.551	9	10.5	11.024	0.217	388	625	470												
200	N210TC	360	320	635	198*	250	4	3)	262	225	158	180	27	34	350	300	400	5	765	307	167	1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	435	700	710												
	N250TC								262													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	435	700	710												
	N280TC								262													1.875	4.375	0.500	2.096	0.551	9	10.5	11.250	0.217	435	728	715												
	N320TC								285													2.125	5.000	0.500	2.350	0.689	11	12.5	13.071	0.217	458	751	720												
225	N360TC								303													2.375	5.625	0.625	2.553 ⁷⁾	0.689	11	12.5	13.071	0.217	476	751	725												
	N210TC	385	320	660	223	250	4.25	M20	262	225	158	180	27	34	400	350	450	5	790	307	180	1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	448	725	775												
	N250TC								262													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	448	725	775												
	N280TC								262													1.875	4.375	0.500	2.096	0.551	9	10.5	11.250	0.217	448	753	780												
250	N320TC								285													2.125	5.000	0.500	2.350	0.689	11	12.5	13.071	0.217	471	776	785												
	N360TC								303													2.375	5.625	0.625	2.553 ⁷⁾	0.689	11	12.5	13.071	0.217	489	776	790												
	N250TC	450	396	791	-	310	5	3)	305	280	195	225	33	42	500	450	550	5	955	380	206	1.625	3.750	0.375	1.796	0.551	7.25	8.5	10	0.217	517	857	1240												
	N280TC								305													1.875	4.375	0.5	2.096	0.551	9	10.5	11.27	0.217	517	873	1240												
280	N320TC								345													2.125	5	0.5	2.35	0.689	11	12.5	14	0.217	557	908	1255												
	N360TC								345													2.375	5.625	0.625	2.651	0.689	11	12.5	14	0.217	557	908	1255												
	N400TC								345													2.875	7	0.75	3.205	0.689	11	12.5	14	0.217	557	908	1255												
	N440TC								425													3.375	8.25	0.875	3.76	0.689	14	16	18	0.217	637	959	1295												
320	N250TC	480	396	821	277	310	5.5	M24	305	280	195	225	33	42	500	450	550	5	985	380	222	1.625	3.750	0.375	1.796	0.551	7.25	8.5	10	0.217	533	887	1360												
	N280TC								305													1.875	4.375	0.5	2.096	0.551	9	10.5	11.27	0.217	533	903	1360												
	N320TC								345													2.125	5	0.5	2.35	0.689	11	12.5	14	0.217	573	938	1375												
	N360TC								345													2.375	5.625	0.625	2.651	0.689	11	12.5	14	0.217	573	938	1375												
321	N400TC								345													2.875	7	0.75	3.205	0.689	11	12.5	14	0.217	573	938	1375												
	N440TC								425													3.375	8.25	0.875	3.76	0.689	14	16	18	0.217	653	989	1415												
	N320TC	570	510	1005	-	386	6.25	3)	382	355	241	280	39	52	600	550	660	6	1205	470	254	2.125	5	0.5	2.35	0.689	11	12.5	14	0.217	642	1103	2150												
	N360TC								382													2.375	5.625	0.625	2.651	0.689	11	12.5	14	0.217	642	1103	2150												
360	N400TC								382													2.875	7	0.75	3.205	0.689	11	12.5	14	0.217	642	1103	2150												
	N440TC								427													3.375	8.25	0.875	3.76	0.689	14	16	18	0.217	687	1154	2230												
	N320TC	610	510	1045	358	386	7	M30	382	355	241	280	39	52	600	550	660	6	1245	470	273	2.125	5	0.5	2.35	0.689	11	12.5	14	0.217	661	1143	2360												
	N360TC								382													2.375	5.625	0.625	2.651	0.689	11	12.5	14	0.217	661	1143	2360												
N400TC									382													2.875	7	0.75	3.205	0.689	11	12.5	14	0.217	661	1143	2360												
	N440TC								427													3.375	8.25	0.875	3.76	0.689	14	16	18	0.217	706	1194	2440												

*Machined surface and N. 4 threaded holes (dimensions in ch. 3.5 «Input face») on opposite side (not in view) too.

** With motor size ≥ N320TC, input hollow shaft with longitudinal cuts, hub clamp and key.

1) Working length of thread 2 · F.


3) For dimension, number and angular position see ch. 3.5.

4) Tolerance 0/+0.0005 in (0/+0.013 mm) for N180TC, +0.0004/+0.001 in (+0.009/+0.025 mm) for motors size ≤ N280TC, 0/+0.0007 in (0/+0.019 mm) for N320TC, N360TC, N400TC, 0/+0.0009 in (0/+0.022 mm) for N440TC.

5) Tolerance 0/+0.0014 in (0/+0.036 mm) for N180TC, N210TC, N250TC, 0/+0.0017 in (0/+0.043 mm) for N280TC, N320TC, N360TC, 0/+0.002 in (0/+0.052 mm) for N400TC and N440TC.


6) Tolerance -0.0007/+0.0007 in (-0.017/+0.017 mm), -0.0011/+0.0011 in (-0.028/+0.028 mm) for motor size ≥ N320TC

7) Out of standard dimension; a key properly modified is supplied together with the gearmotor.



Designs (direction of rotation)

MR 3I 140 ... 360




● Position of reference groove (see ch. 3) for radial load verification.

Mounting positions

Unless otherwise stated, gearmotors are supplied in mounting position **B3** (see ch. 2).

MR 3I 140 ... 360

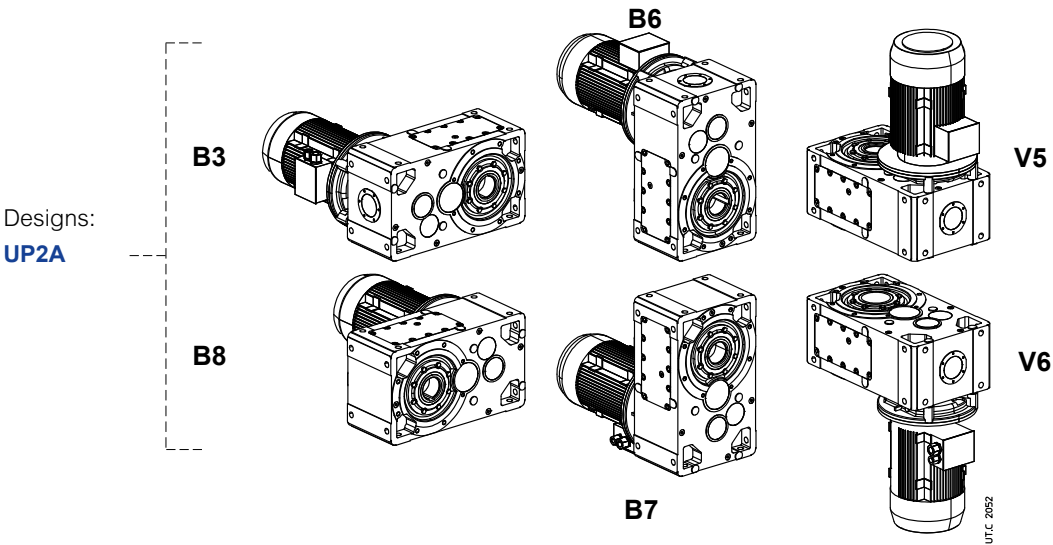


Oil quantity MR 3I 140 ... 360

Lubricant quantities [gal] stated in the table are approximate for provisioning. The exact oil quantity the gearmotor is to be filled with is defined by the level plug.

Mounting position	140	160	180	200	225	250	280	320, 321	360
B3	1.7	3.2	3.4	6.6	6.9	12	13	26	26
B8	2.6	4.8	5	9.2	9.8	18	19	36	37
B6	2.6	4.8	5	9.2	9.8	18	19	36	37
B7	2.6	4.8	5	9.2	9.8	18	19	36	37
V5	2.6	4.8	5	9.2	9.8	18	19	36	37
V6	2.6	4.8	5	9.2	9.8	18	19	36	37

Lubrication details

MR 3I 140 ... 360

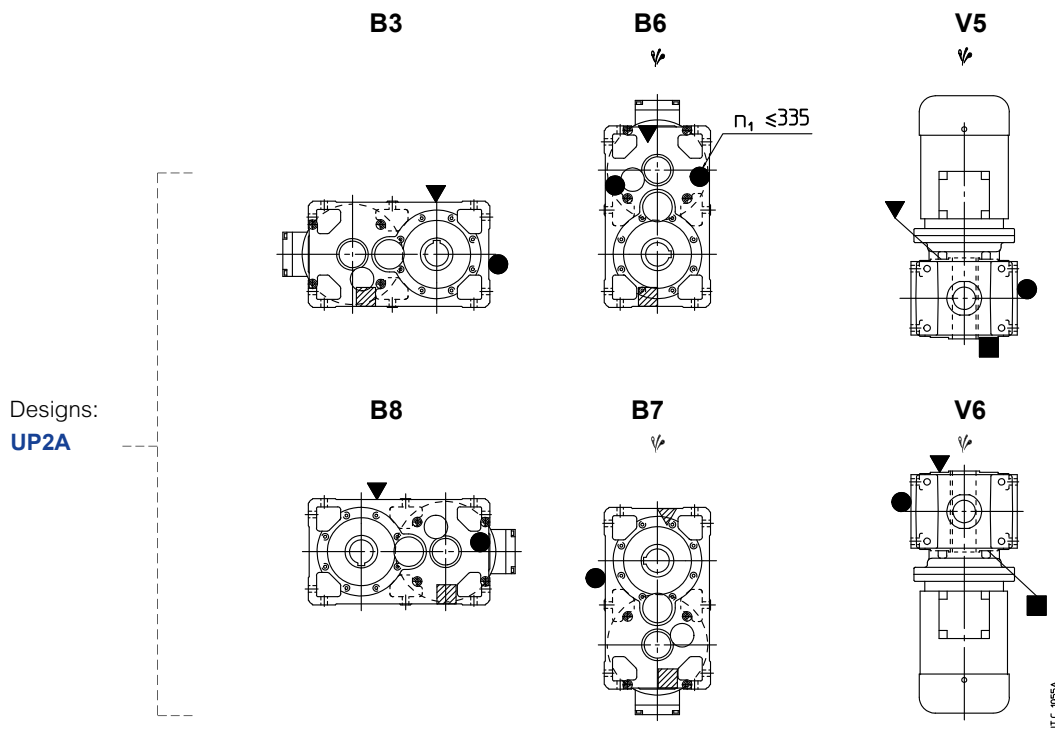


ψ Possible high oil splash: for the corrective factor f_{t3} of nominal thermal power P_{tN} see ch. 3.

- ▼ oil filler plug
- oil level plug
- oil drain plug
- oil filler plug with oil dip stick
- ▼ oil filler plug on opposite side (not in view)
- oil level plug on opposite side (not in view)
- oil drain plug on opposite side (not in view)

Designs (direction of rotation)

MR 2I 140 ... 225 - Long model




UP4A

● Position of reference groove (see ch. 3) for radial load verification.

Mounting positions

Unless otherwise stated, gearmotors are supplied in mounting position **B3** (see ch. 2).

MR 2I 140 ... 225 - Long model

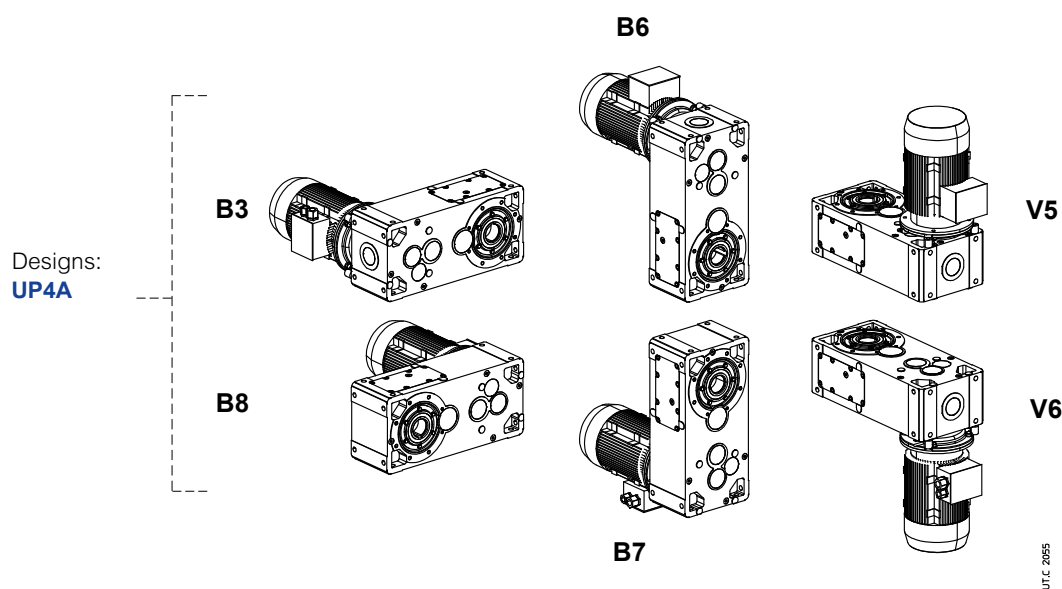


Oil quantity MR 2I 140 ... 225 – Long model

Lubricant quantities [gal] stated in the table are approximate for provisioning. The exact oil quantity the gearmotor is to be filled with is defined by the level plug.

Mounting position	140	160	180	200	225
B3	2.3	4.2	4.6	8.7	9
B8	3.2	5.3	5.5	10	11
B7	4.1	7.4	7.8	15	15
B6	4.1	7.4	7.8	15	15
V5	3.6	6.3	6.7	13	13
V6	3.6	6.3	6.7	13	13

Lubrication details

MR 2I 140 ... 225 - Long model

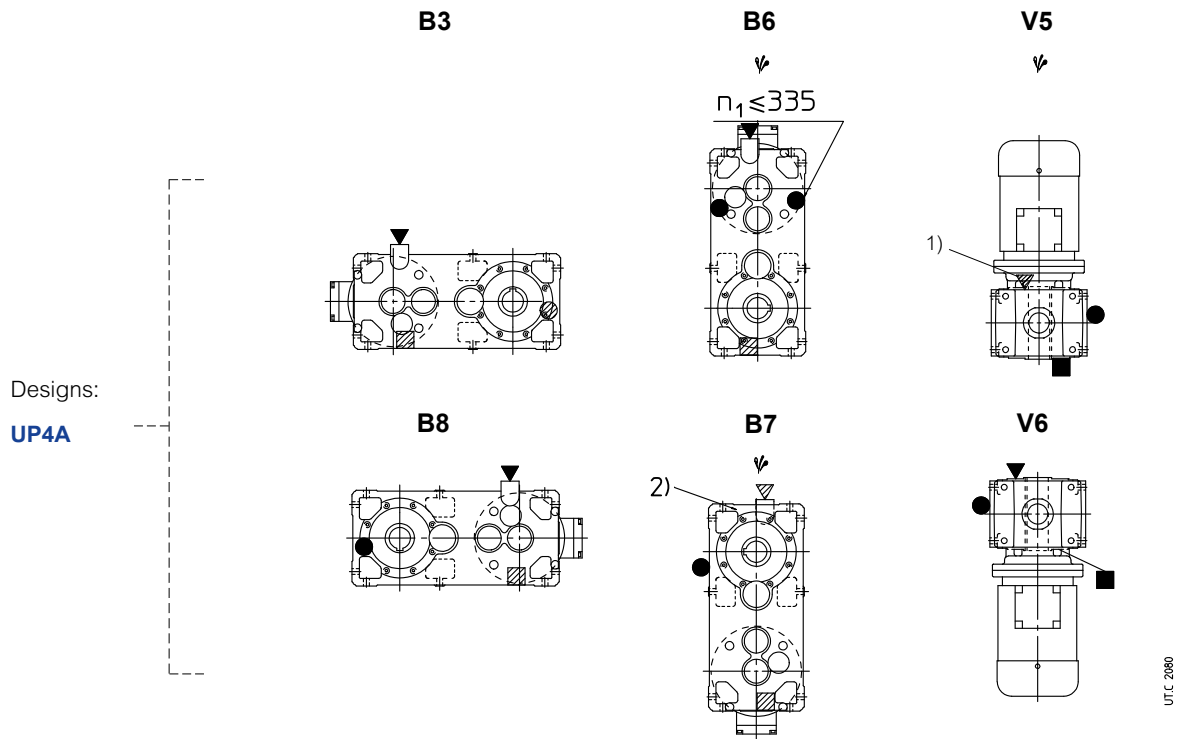


- 1) Oil filler plug possible also on low speed shaft side.
 2) Oil filler plug possible also on opposite side.
 ▼ Possible high oil splash: for the corrective factor f_{t3} of nominal thermal power P_{tN} see ch. 3.

- ▼ oil filler plug
 ● oil level plug
 ■ oil drain plug
 ▼ oil filler plug with oil level dip stick
 ▼ oil filler plug on opposite side (not in view)
 ● oil level plug on opposite side (not in view)
 ■ oil drain plug on opposite side (not in view)

Gearmotors MR 3I - Long model

Dimensions

MR 3I 140 ... 225 - Long model

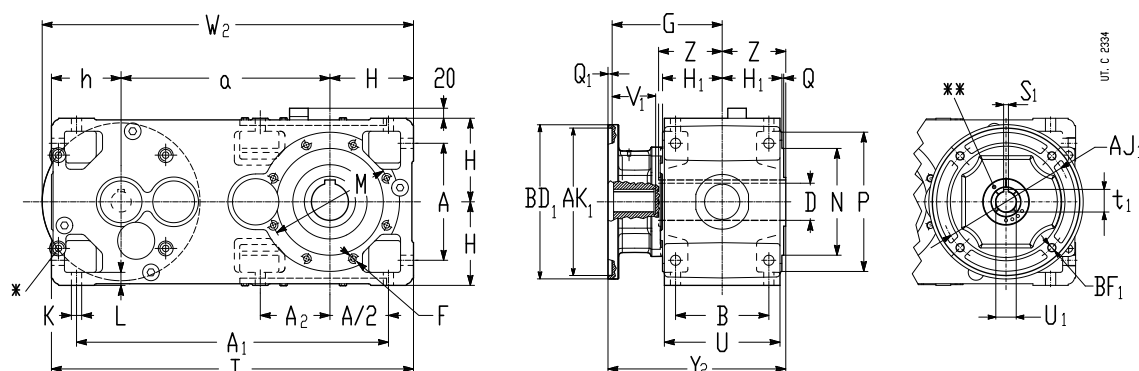

																					NEMA C-Face input side												
Gear red.	Size NEMA motor frame	a	A	A1	A2	B	D Ø	F	G	H	H1	h	K Ø	L	M Ø	N Ø	P Ø	Q	T	U	Z	U1 Ø	V1	S1	t1	BF1 Ø	AJ1 Ø	AK1 Ø	BD1 Ø	Q1	Y2	W2	Mass
							in				h11	h12	h11			h6							in	in	in	in	in	in	in	in			
									1)														4)		5)				6)				
140	N180TC	373	212	427	127	162	2.75	3)	196.5	150	103.5	125	18	23	265	230	300	4	515	201	125	1.125	2.620	0.250	1.241	0.551	7.25	8.5	9.055	0.217	327	638	315
	N210TC								196.5													1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	327	638	315
	N250TC								216.5													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	347	638	320
160	N180TC	450	252	507	150*	201	3.25	M16	217.5	180	128.5	150	22	28	265	230	300	4	615	249	136	1.125	2.620	0.250	1.241	0.551	7.25	8.5	9.055	0.217	359	745	485
	N210TC								217.5													1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	359	745	485
	N250TC								217.5													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	359	745	485
	N280TC								232.5													1.875	4.375	0.500	2.096	0.551	9	10.5	11.024	0.217	374	770	490
180	N180TC	470	252	527	170	201	3.625	M16	217.5	180	128.5	150	22	28	300	250	350	5	635	249	150	1.125	2.620	0.250	1.241	0.551	7.25	8.5	9.055	0.217	373	765	530
	N210TC								217.5													1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	373	765	530
	N250TC								217.5													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	373	765	530
	N280TC								232.5													1.875	4.375	0.500	2.096	0.551	9	10.5	11.024	0.217	388	790	535
200	N210TC	556	320	635	198*	250	4	3)	262	225	158	180	27	34	350	300	400	5	765	307	167	1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	435	896	820
	N250TC								262													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	435	896	820
	N280TC								262													1.875	4.375	0.500	2.096	0.551	9	10.5	11.250	0.217	435	924	825
	N320TC								285													2.125	5.000	0.500	2.350	0.689	11	12.5	13.071	0.217	458	947	830
	N360TC								303													2.375	5.625	0.625	2.553 ⁷⁾	0.689	11	12.5	13.071	0.217	476	947	835
225	N210TC	581	320	660	223	250	4.25	M20	262	225	158	180	27	34	400	350	450	5	790	307	180	1.375	3.125	0.313	1.518	0.551	7.25	8.5	9.055	0.217	448	921	885
	N250TC								262													1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.055	0.217	448	921	885
	N280TC								262													1.875	4.375	0.500	2.096	0.551	9	10.5	11.250	0.217	448	949	890
	N320TC								285													2.125	5.000	0.500	2.350	0.689	11	12.5	13.071	0.217	471	972	895
	N360TC								303													2.375	5.625	0.625	2.553 ⁷⁾	0.689	11	12.5	13.071	0.217	489	972	900

*Machined surface and N. 4 threaded holes (dimensions in ch. 3.5 «Input face») on opposite side (not in view) too.

** With motor size ≥ N320TC, input hollow shaft with longitudinal cuts, hub clamp and key.

1) Working length of thread 2 · F.


3) For dimension, number and angular position see ch. 3.5.

4) Tolerance 0/+0.0005 in (0/+0.013 mm) for N180TC, +0.0004/+0.001 in (+0.009/+0.025 mm) for motors size ≤ N280TC, 0/+0.0007 in (0/+0.019 mm) for motors size ≥ 320TC.

5) Tolerance 0/+0.0014 in (0/+0.036 mm) for N180TC, N210TC and N250TC, 0/+0.0017 in (0/+0.043 mm) for motors size ≥ N280TC.

6) Tolerance -0.0007/+0.0007 in (-0.017/+0.017 mm), -0.0011/+0.0011 in (-0.028/+0.028 mm) for motors size ≥ N320TC.


7) Out of standard dimension; a key properly modified is supplied together with the gearmotor.



33

Designs (direction of rotation)

MR 3I 140 ... 225 - Long model




UP4A

● Position of reference groove (see ch. 3) for radial load verification.

Mounting positions

Unless otherwise stated, gearmotors are supplied in mounting position **B3** (see ch. 2).

MR 3I 140 ... 225 - Long model

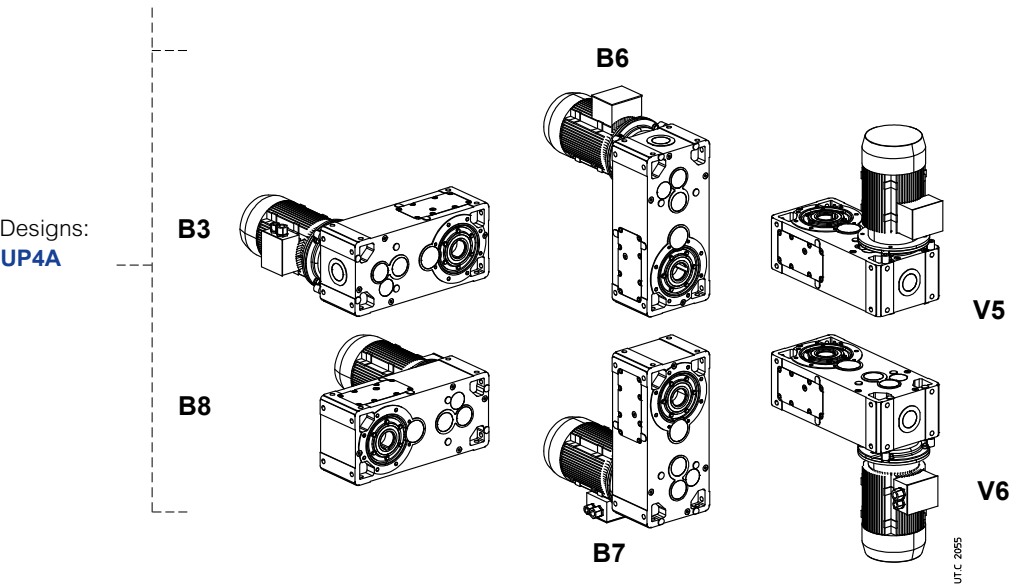


Oil quantity MR 3I 140 ... 225 – Long model

Lubricant quantities [gal] stated in the table are approximate for provisioning. The exact oil quantity the gearmotor is to be filled with is defined by the level plug.

Mounting position	140	160	180	200	225
B3	4.2	4.6	8.7	9	34
B8	5.8	6.2	12	12	46
B6	7.4	7.8	15	15	57
B7	7.4	7.8	15	15	57
V5	6.3	6.7	13	13	50
V6	6.3	6.7	13	13	50


Lubrication details

MR 3I 140 ... 225 - Long model

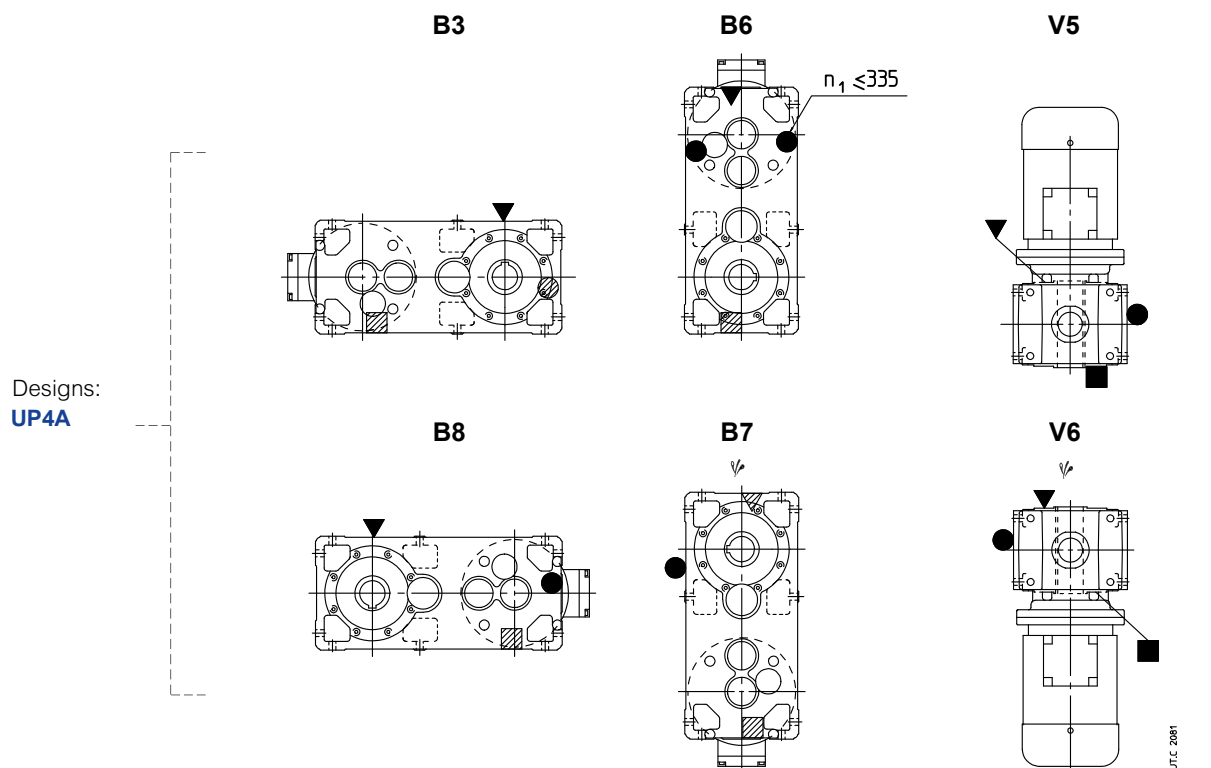


⚡ Possible high oil splash: for the corrective factor f_{t3} of nominal thermal power P_{tN} see ch. 3.


- ▼ oil filler plug
- oil level plug
- oil drain plug
- ▼ oil filler plug with oil level dip stick
- ▼ oil filler plug on opposite side (not in view)
- oil level plug on opposite side (not in view)
- oil drain plug on opposite side (not in view)

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i	
2)						
1.5	7.64	11 650	3.15	MR C2I 140 - N180TC	182 TC	6 151
	9.37	9 490	4	MR C2I 140 - N180TC	182 TC	6 123
	11.7	7 590	5	MR C2I 140 - N180TC	182 TC	6 98.2
	13.1	6 780	5.6	MR C2I 140 - N180TC	182 TC	6 87.8
	14.6	6 070	7.1	MR C2I 140 - N180TC	182 TC	6 78.6
	16.4	5 430	7.1	MR C2I 140 - N180TC	182 TC	6 70.2
	18.6	4 790	8.5	MR C2I 140 - N180TC	182 TC	6 62.0
	20.8	4 280	9	MR C2I 140 - N180TC	182 TC	6 55.4
	22.8	3 900	9.5	MR C2I 140 - N180TC	182 TC	6 50.4
2	7.64	15 500	2.36	MR C2I 140 - N180TC	184 TC	6 151
	7.48	15 850	3.55	MR C2I 160 - N180TC	184 TC	6 154
	9.37	12 650	3	MR C2I 140 - N180TC	184 TC	6 123
	8.90	13 300	5	MR C2I 160 - N180TC	184 TC	6 129
	11.7	10 100	3.75	MR C2I 140 - N180TC	184 TC	6 98.2
	13.1	9 040	4.25	MR C2I 140 - N180TC	184 TC	6 87.8
	14.6	8 100	5.3	MR C2I 140 - N180TC	184 TC	6 78.6
	16.4	7 230	5.6	MR C2I 140 - N180TC	184 TC	6 70.2
	18.6	6 380	6.3	MR C2I 140 - N180TC	184 TC	6 62.0
	20.8	5 700	6.7	MR C2I 140 - N180TC	184 TC	6 55.4
	22.8	5 200	7.1	MR C2I 140 - N180TC	184 TC	6 50.4
	25.5	4 640	8	MR C2I 140 - N180TC	184 TC	6 45.1
	29.7	3 980	9	MR C2I 140 - N180TC	184 TC	6 38.7
	30.6	3 870	9.5	MR C2I 140 - N180TC	184 TC	6 37.5
	35.7	3 320	10	MR C2I 140 - N180TC	184 TC	6 32.2
3	7.64	23 250	1.6	MR C2I 140 - N210TC	213 TC	6 151
	7.48	23 800	2.36	MR C2I 160 - N210TC	213 TC	6 154
	7.26	24 500	3.35	MR C2I 180 - N210TC	213 TC	6 158
	9.37	18 950	2	MR C2I 140 - N210TC	213 TC	6 123
	8.90	19 950	3.35	MR C2I 160 - N210TC	213 TC	6 129
	11.6	15 300	2.24	MR C2I 140 - N180TC	182 TC	4 151
	11.7	15 200	2.5	MR C2I 140 - N210TC	213 TC	6 98.2
	11.4	15 600	3.35	MR C2I 160 - N180TC	182 TC	4 154
	13.1	13 550	2.8	MR C2I 140 - N210TC	213 TC	6 87.8
	14.3	12 450	3	MR C2I 140 - N180TC	182 TC	4 123
	13.5	13 100	4.75	MR C2I 160 - N180TC	182 TC	4 129
	16.4	10 850	3.55	MR C2I 140 - N210TC	213 TC	6 70.2
	17.8	9 970	3.75	MR C2I 140 - N180TC	182 TC	4 98.2
	19.9	8 910	4.25	MR C2I 140 - N180TC	182 TC	4 87.8
	22.3	7 980	5	MR C2I 140 - N180TC	182 TC	4 78.6
	24.9	7 130	5.3	MR C2I 140 - N180TC	182 TC	4 70.2
	28.2	6 290	5.6	MR C2I 140 - N180TC	182 TC	4 62.0
	31.6	5 620	6.7	MR C2I 140 - N180TC	182 TC	4 55.4
	36.8	4 930	3.75	MR CI 125 - N210TC	213 TC	6 31.3
	34.7	5 120	7.1	MR C2I 140 - N180TC	182 TC	4 50.4
	38.8	4 580	8	MR C2I 140 - N180TC	182 TC	4 45.1
	46.0	3 950	5.6	MR CI 125 - N210TC	213 TC	6 25.0
	45.3	3 930	9	MR C2I 140 - N180TC	182 TC	4 38.7
	46.6	3 810	10	MR C2I 140 - N180TC	182 TC	4 37.5
	57.5	3 160	7.1	MR CI 125 - N210TC	213 TC	6 20.0
	54.4	3 270	10	MR C2I 140 - N180TC	182 TC	4 32.2
	71.9	2 530	9	MR CI 125 - N210TC	213 TC	6 16.0
5	7.64	38 800	0.95	MR C2I 140 - N210TC	215 TC	6 151
	7.48	39 650	1.4	MR C2I 160 - N210TC	215 TC	6 154
	7.26	40 800	2	MR C2I 180 - N210TC	215 TC	6 158
	7.59	39 000	3	MR C2I 200 - N210TC	215 TC	6 151
5	9.37	31 600	1.18	MR C2I 140 - N210TC	215 TC	6 123
	8.90	33 250	2	MR C2I 160 - N210TC	215 TC	6 129
	8.86	33 450	2.5	MR C2I 180 - N210TC	215 TC	6 130
	9.04	32 750	4	MR C2I 200 - N210TC	215 TC	6 127
	11.6	25 500	1.32	MR C2I 140 - N180TC	184 TC	4 151
	11.7	25 300	1.5	MR C2I 140 - N210TC	215 TC	6 98.2
	11.4	26 050	2	MR C2I 160 - N180TC	184 TC	4 154
	11.1	26 600	2.5	MR C2I 160 - N210TC	215 TC	6 103
	11.0	26 850	2.8	MR C2I 180 - N180TC	184 TC	4 158
	13.1	22 600	1.7	MR C2I 140 - N210TC	215 TC	6 87.8
	12.7	23 300	3	MR C2I 160 - N210TC	215 TC	6 90.4
	14.3	20 800	1.8	MR C2I 140 - N180TC	184 TC	4 123
	14.6	20 250	2.12	MR C2I 140 - N210TC	215 TC	6 78.6
	13.5	21 850	2.8	MR C2I 160 - N180TC	184 TC	4 129
	13.9	21 300	3	MR C2I 160 - N210TC	215 TC	6 82.7
	13.5	21 950	3.75	MR C2I 180 - N180TC	184 TC	4 130
	16.4	18 100	2.24	MR C2I 140 - N210TC	215 TC	6 70.2
	17.8	16 600	2.24	MR C2I 140 - N180TC	184 TC	4 98.2
	18.6	15 950	2.5	MR C2I 140 - N210TC	215 TC	6 62.0
	16.9	17 500	3.55	MR C2I 160 - N180TC	184 TC	4 103
	19.9	14 850	2.5	MR C2I 140 - N180TC	184 TC	4 87.8
	20.8	14 250	2.65	MR C2I 140 - N210TC	215 TC	6 55.4
	19.4	15 300	4.25	MR C2I 160 - N180TC	184 TC	4 90.4
	22.3	13 300	3	MR C2I 140 - N180TC	184 TC	4 78.6
	24.9	11 900	3.15	MR C2I 140 - N180TC	184 TC	4 70.2
	28.2	10 500	3.55	MR C2I 140 - N180TC	184 TC	4 62.0
	31.6	9 370	4	MR C2I 140 - N180TC	184 TC	4 55.4
	36.8	8 220	2.24	MR CI 125 - N210TC	215 TC	6 31.3
	34.7	8 540	4.25	MR C2I 140 - N180TC	184 TC	4 50.4
	38.8	7 630	5	MR C2I 140 - N180TC	184 TC	4 45.1
	46.0	6 580	3.35	MR CI 125 - N210TC	215 TC	6 25.0
	45.3	6 540	5.3	MR C2I 140 - N180TC	184 TC	4 38.7
	46.6	6 350	6	MR C2I 140 - N180TC	184 TC	4 37.5
	57.5	5 260	4.25	MR CI 125 - N210TC	215 TC	6 20.0
	54.4	5 450	6	MR C2I 140 - N180TC	184 TC	4 32.2
	58.8	5 040	7.5	MR C2I 140 - N180TC	184 TC	4 29.8
	71.9	4 210	5.3	MR CI 125 - N210TC	215 TC	6 16.0
	68.6	4 320	8	MR C2I 140 - N180TC	184 TC	4 25.5
	81.0	3 730	8.5	MR CI 140 - N210TC	215 TC	6 14.2
	91.2	3 320	7.1	MR CI 125 - N210TC	215 TC	6 12.6
	100	3 020	8.5	MR CI 140 - N210TC	215 TC	6 11.5
	111	2 730	7.5	MR CI 125 - N210TC	215 TC	6 10.4
	144	2 100	7.5	MR CI 125 - N210TC	215 TC	6 7.98
	182	1 660	7.5	MR CI 125 - N210TC	215 TC	6 6.31
7.5	7.48	59 450	0.95	MR C2I 160 - N250TC	254 TC	6 154
	7.26	61 250	1.32	MR C2I 180 - N250TC	254 TC	6 158
	7.59	58 550	2	MR C2I 200 - N250TC	254 TC	6 151
	7.37	60 300	2.8	MR C2I 225 - N250TC	254 TC	6 156
	8.90	49 900	1.32	MR C2I 160 - N250TC	254 TC	6 129
	8.86	50 150	1.7	MR C2I 180 - N250TC	254 TC	6 130
	9.04	49 150	2.8	MR C2I 200 - N250TC	254 TC	6 127
	11.6	38 250	0.9	MR C2I 140 - N210TC	213 TC	4 151
	11.4	39 050	1.4	MR C2I 160 - N210TC	213 TC	4 154
	11.1	39 950	1.6	MR C2I 160 - N250TC	254 TC	6 103
	11.0	40 250	1.9	MR C2I 180 - N210TC	213 TC	4 158
	11.1	40 100	2.12	MR C2I 180 - N250TC	254 TC	6 104
	11.6	38 450	2.8	MR C2I 200 - N210TC	213 TC	4 151
	11.3	39 300	3.35	MR C2I 200 - N250TC	254 TC	6 102
	11.2	39 600	4	MR C2I 225 - N210TC	213 TC	4 156

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2... S10; in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
				2)	
7.5	12.7	34 900	2	MR C2I 160 - N250TC 254 TC	6 90.4
	12.8	34 750	2.12	MR C2I 180 - N250TC 254 TC	6 90.0
	13.1	33 950	4	MR C2I 200 - N250TC 254 TC	6 87.9
	14.3	31 150	1.18	MR C2I 140 - N210TC 213 TC	4 123
	13.5	32 800	1.9	MR C2I 160 - N210TC 213 TC	4 129
	13.5	32 950	2.5	MR C2I 180 - N210TC 213 TC	4 130
	13.8	32 300	3.75	MR C2I 200 - N210TC 213 TC	4 127
	15.9	27 950	2.5	MR C2I 160 - N250TC 254 TC	6 72.3
	16.0	27 800	2.65	MR C2I 180 - N250TC 254 TC	6 72.0
	17.8	24 950	1.5	MR C2I 140 - N210TC 213 TC	4 98.2
	16.9	26 250	2.36	MR C2I 160 - N210TC 213 TC	4 103
	16.9	26 350	3.15	MR C2I 180 - N210TC 213 TC	4 104
	19.9	22 300	1.7	MR C2I 140 - N210TC 213 TC	4 87.8
	19.4	22 950	3	MR C2I 160 - N210TC 213 TC	4 90.4
	22.3	19 950	2	MR C2I 140 - N210TC 213 TC	4 78.6
	21.2	21 000	3	MR C2I 160 - N210TC 213 TC	4 82.7
	24.9	17 850	2.12	MR C2I 140 - N210TC 213 TC	4 70.2
	24.2	18 350	3.55	MR C2I 160 - N210TC 213 TC	4 72.3
	28.2	15 750	2.36	MR C2I 140 - N210TC 213 TC	4 62.0
	26.8	16 550	3.75	MR C2I 160 - N210TC 213 TC	4 65.2
	31.6	14 050	2.65	MR C2I 140 - N210TC 213 TC	4 55.4
	36.8	12 350	1.5	MR CI 125 - N250TC 254 TC	6 31.3
	34.7	12 800	2.8	MR C2I 140 - N210TC 213 TC	4 50.4
	33.6	13 250	4.5	MR C2I 160 - N210TC 213 TC	4 52.1
	38.8	11 450	3.35	MR C2I 140 - N210TC 213 TC	4 45.1
	46.0	9 860	2.24	MR CI 125 - N250TC 254 TC	6 25.0
	45.3	9 820	3.55	MR C2I 140 - N210TC 213 TC	4 38.7
	46.6	9 530	4	MR C2I 140 - N210TC 213 TC	4 37.5
	56.0	8 100	2.24	MR CI 125 - N210TC 213 TC	4 31.3
	57.5	7 890	2.8	MR CI 125 - N250TC 254 TC	6 20.0
	54.4	8 170	4	MR C2I 140 - N210TC 213 TC	4 32.2
	58.8	7 550	5	MR C2I 140 - N210TC 213 TC	4 29.8
	70.0	6 480	3.35	MR CI 125 - N210TC 213 TC	4 25.0
	81.0	5 600	5.6	MR CI 140 - N250TC 254 TC	6 14.2
	87.5	5 190	4.25	MR CI 125 - N210TC 213 TC	4 20.0
	97.2	4 670	6.3	MR CI 140 - N210TC 213 TC	4 18.0
	109	4 150	5	MR CI 125 - N210TC 213 TC	4 16.0
	123	3 680	8.5	MR CI 140 - N210TC 213 TC	4 14.2
	139	3 270	7.1	MR CI 125 - N210TC 213 TC	4 12.6
	152	2 980	8.5	MR CI 140 - N210TC 213 TC	4 11.5
	169	2 690	7.5	MR CI 125 - N210TC 213 TC	4 10.4
	219	2 070	7.5	MR CI 125 - N210TC 213 TC	4 7.98
	277	1 640	7.5	MR CI 125 - N210TC 213 TC	4 6.31
10	7.26	81 650	1	MR C2I 180 - N250TC 256 TC	6 158
	7.59	78 050	1.5	MR C2I 200 - N250TC 256 TC	6 151
	7.37	80 400	2.12	MR C2I 225 - N250TC 256 TC	6 156
	7.36	80 500	3	MR C2I 250 - N250TC 256 TC	6 156
	8.90	66 550	1	MR C2I 160 - N250TC 256 TC	6 129
	8.86	66 850	1.25	MR C2I 180 - N250TC 256 TC	6 130
	9.04	65 500	2	MR C2I 200 - N250TC 256 TC	6 127
	9.18	64 550	2.36	MR C2I 225 - N250TC 256 TC	6 125
	9.34	63 400	4.25	MR C2I 250 - N250TC 256 TC	6 123
	11.4	52 100	1	MR C2I 160 - N210TC 215 TC	4 154
	11.1	53 250	1.25	MR C2I 180 - N210TC 215 TC	4 158
	11.0	53 650	1.4	MR C2I 200 - N210TC 215 TC	4 151
	11.1	53 500	1.6	MR C2I 180 - N250TC 256 TC	6 104
	11.6	51 300	2.12	MR C2I 200 - N210TC 215 TC	4 151
	11.3	52 400	2.5	MR C2I 200 - N250TC 256 TC	6 102
	11.2	52 850	3	MR C2I 225 - N210TC 215 TC	4 156

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
				2)	
10	12.7	46 550	1.5	MR C2I 160 - N250TC 256 TC	6 90.4
	12.8	46 350	1.6	MR C2I 180 - N250TC 256 TC	6 90.0
	13.1	45 300	3	MR C2I 200 - N250TC 256 TC	6 87.9
	14.3	41 550	0.9	MR C2I 140 - N210TC 215 TC	4 123
	13.5	43 750	1.4	MR C2I 160 - N210TC 215 TC	4 129
	13.5	43 950	1.9	MR C2I 180 - N210TC 215 TC	4 130
	13.8	43 050	3	MR C2I 200 - N210TC 215 TC	4 127
	14.1	41 950	3	MR C2I 200 - N250TC 256 TC	6 81.4
	14.0	42 400	3.55	MR C2I 225 - N210TC 215 TC	4 125
	15.9	37 250	1.8	MR C2I 160 - N250TC 256 TC	6 72.3
	16.0	37 100	2	MR C2I 180 - N250TC 256 TC	6 72.0
	16.4	36 250	3.75	MR C2I 200 - N250TC 256 TC	6 70.3
	17.8	33 250	1.12	MR C2I 140 - N210TC 215 TC	4 98.2
	16.9	35 000	1.8	MR C2I 160 - N210TC 215 TC	4 103
	16.9	35 150	2.36	MR C2I 180 - N210TC 215 TC	4 104
	17.2	34 450	3.55	MR C2I 200 - N210TC 215 TC	4 102
	19.9	29 700	1.25	MR C2I 140 - N210TC 215 TC	4 87.8
	19.4	30 600	2.24	MR C2I 160 - N210TC 215 TC	4 90.4
	19.4	30 450	2.36	MR C2I 180 - N210TC 215 TC	4 90.0
	19.9	29 750	4.25	MR C2I 200 - N210TC 215 TC	4 87.9
	22.3	26 600	1.5	MR C2I 140 - N210TC 215 TC	4 78.6
	21.2	28 000	2.24	MR C2I 160 - N210TC 215 TC	4 82.7
	21.1	28 100	3	MR C2I 180 - N210TC 215 TC	4 83.1
	21.5	27 550	4.5	MR C2I 200 - N210TC 215 TC	4 81.4
	24.9	23 750	1.6	MR C2I 140 - N210TC 215 TC	4 70.2
	24.2	24 500	2.65	MR C2I 160 - N210TC 215 TC	4 72.3
	24.3	24 350	3	MR C2I 180 - N210TC 215 TC	4 72.0
	24.9	23 800	5.3	MR C2I 200 - N210TC 215 TC	4 70.3
	28.2	20 950	1.7	MR C2I 140 - N210TC 215 TC	4 62.0
	26.8	22 050	2.8	MR C2I 160 - N210TC 215 TC	4 65.2
	26.7	22 200	3.75	MR C2I 180 - N210TC 215 TC	4 65.5
	31.6	18 750	2	MR C2I 140 - N210TC 215 TC	4 55.4
	30.7	19 300	3.35	MR C2I 160 - N210TC 215 TC	4 57.0
	36.8	16 450	1.12	MR CI 125 - N250TC 256 TC	6 31.3
	34.7	17 100	2.12	MR C2I 140 - N210TC 215 TC	4 50.4
	33.6	17 650	3.35	MR C2I 160 - N210TC 215 TC	4 52.1
	38.8	15 250	2.5	MR C2I 140 - N210TC 215 TC	4 45.1
	38.4	15 450	4.25	MR C2I 160 - N210TC 215 TC	4 45.6
	46.0	13 150	1.7	MR CI 125 - N250TC 256 TC	6 25.0
	45.3	13 100	2.8	MR C2I 140 - N210TC 215 TC	4 38.7
	44.3	13 400	4.5	MR C2I 160 - N210TC 215 TC	4 39.5
	46.6	12 700	3	MR C2I 140 - N210TC 215 TC	4 37.5
	46.7	12 700	4.5	MR C2I 160 - N210TC 215 TC	4 37.5
	56.0	10 800	1.7	MR CI 125 - N210TC 215 TC	4 31.3
	57.5	10 500	2.12	MR CI 125 - N250TC 256 TC	6 20.0
	57.5	10 500	3	MR CI 140 - N250TC 256 TC	6 20.0
	54.4	10 900	3	MR C2I 140 - N210TC 215 TC	4 32.2
	53.9	11 000	5	MR C2I 160 - N210TC 215 TC	4 32.5
	58.8	10 050	3.75	MR C2I 140 - N210TC 215 TC	4 29.8
	70.0	8 640	2.5	MR CI 125 - N210TC 215 TC	4 25.0
	68.6	8 640	4	MR C2I 140 - N210TC 215 TC	4 25.5
	81.0	7 470	4.25	MR CI 140 - N250TC 256 TC	6 14.2
	87.5	6 910	3.15	MR CI 125 - N210TC 215 TC	4 20.0
	87.5	6 910	4.25	MR CI 140 - N210TC 215 TC	4 20.0
	97.2	6 220	4.75	MR CI 140 - N210TC 215 TC	4 18.0
	109	5 530	3.75	MR CI 125 - N210TC 215 TC	4 16.0
	123	4 910	6.3	MR CI 140 - N210TC 215 TC	4 14.2
	139	4 360	5.3	MR CI 125 - N210TC 215 TC	4 12.6
	152	3 970	6.3	MR CI 140 - N210TC 215 TC	4 11.5
	169	3 580	5.6	MR CI 125 - N210TC 215 TC	4 10.4
	219	2 760	5.6	MR CI 125 - N210TC 215 TC	4 7.98
	277	2 180	5.6	MR CI 125 - N210TC 215 TC	4 6.31

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
15	7.59	117 100	1	MR C2I 200 - N280TC 284 TC	6 151
	7.37	120 600	1.4	MR C2I 225 - N280TC 284 TC	6 156
	7.36	120 700	2	MR C2I 250 - N280TC 284 TC	6 156
	7.48	118 900	2.65	MR C2I 280 - N280TC 284 TC	6 154
	8.86	100 300	0.85	MR C2I 180 - N280TC 284 TC	6 130
	9.04	98 300	1.4	MR C2I 200 - N280TC 284 TC	6 127
	9.18	96 800	1.6	MR C2I 225 - N280TC 284 TC	6 125
	9.34	95 100	2.8	MR C2I 250 - N280TC 284 TC	6 123
	9.17	96 950	3.35	MR C2I 280 - N280TC 284 TC	6 125
	11.1	79 850	0.8	MR C2I 160 - N280TC 284 TC	6 103
	11.0	80 500	0.95	MR C2I 180 - N250TC 254 TC	4 158
	11.1	80 250	1.06	MR C2I 180 - N280TC 284 TC	6 104
	11.6	76 900	1.4	MR C2I 200 - N250TC 254 TC	4 151
	11.3	78 600	1.7	MR C2I 200 - N280TC 284 TC	6 102
	11.2	79 250	2	MR C2I 225 - N250TC 254 TC	4 156
	11.2	79 350	2.8	MR C2I 250 - N250TC 254 TC	4 156
	11.7	76 100	3.35	MR C2I 250 - N280TC 284 TC	6 98.5
	11.4	78 100	3.75	MR C2I 280 - N250TC 254 TC	4 154
	12.7	69 850	1	MR C2I 160 - N280TC 284 TC	6 90.4
	12.8	69 550	1.06	MR C2I 180 - N280TC 284 TC	6 90.0
	13.1	67 950	2	MR C2I 200 - N280TC 284 TC	6 87.9
	12.7	69 750	2.5	MR C2I 225 - N280TC 284 TC	6 90.3
	12.9	68 750	3.75	MR C2I 250 - N280TC 284 TC	6 89.0
	13.5	65 600	0.95	MR C2I 160 - N250TC 254 TC	4 129
	13.5	65 900	1.25	MR C2I 180 - N250TC 254 TC	4 130
	13.8	64 600	1.9	MR C2I 200 - N250TC 254 TC	4 127
	14.0	63 600	2.36	MR C2I 225 - N250TC 254 TC	4 125
	14.3	61 950	2.8	MR C2I 225 - N280TC 284 TC	6 80.2
	14.2	62 500	4	MR C2I 250 - N250TC 254 TC	4 123
	15.9	55 900	1.25	MR C2I 160 - N280TC 284 TC	6 72.3
	16.0	55 650	1.32	MR C2I 180 - N280TC 284 TC	6 72.0
	16.4	54 350	2.5	MR C2I 200 - N280TC 284 TC	6 70.3
	16.9	52 450	1.18	MR C2I 160 - N250TC 254 TC	4 103
	16.9	52 750	1.6	MR C2I 180 - N250TC 254 TC	4 104
	17.2	51 650	2.36	MR C2I 200 - N250TC 254 TC	4 102
	17.5	50 900	3.35	MR C2I 225 - N250TC 254 TC	4 100
	19.4	45 900	1.5	MR C2I 160 - N250TC 254 TC	4 90.4
	19.4	45 700	1.6	MR C2I 180 - N250TC 254 TC	4 90.0
	19.9	44 650	2.8	MR C2I 200 - N250TC 254 TC	4 87.9
	19.4	45 850	3.55	MR C2I 225 - N250TC 254 TC	4 90.3
	21.2	42 000	1.5	MR C2I 160 - N250TC 254 TC	4 82.7
	21.1	42 200	2	MR C2I 180 - N250TC 254 TC	4 83.1
	21.5	41 350	3	MR C2I 200 - N250TC 254 TC	4 81.4
	21.8	40 700	4	MR C2I 225 - N250TC 254 TC	4 80.2
	24.2	36 700	1.8	MR C2I 160 - N250TC 254 TC	4 72.3
	24.3	36 550	2	MR C2I 180 - N250TC 254 TC	4 72.0
	24.9	35 700	3.55	MR C2I 200 - N250TC 254 TC	4 70.3
	26.8	33 100	1.8	MR C2I 160 - N250TC 254 TC	4 65.2
	29.1	30 550	2.24	MR C2I 160 - N280TC 284 TC	6 39.5
	26.7	33 250	2.5	MR C2I 180 - N250TC 254 TC	4 65.5
	27.3	32 600	3.75	MR C2I 200 - N250TC 254 TC	4 64.2
	30.7	28 950	2.24	MR C2I 160 - N250TC 254 TC	4 57.0
	30.8	28 850	2.5	MR C2I 180 - N250TC 254 TC	4 56.8
	31.6	28 150	4.5	MR C2I 200 - N250TC 254 TC	4 55.5
	37.4	24 300	1.4	MR CI 160 - N280TC 284 TC	6 30.8
	33.6	26 500	2.24	MR C2I 160 - N250TC 254 TC	4 52.1
	33.4	26 600	3	MR C2I 180 - N250TC 254 TC	4 52.4
	32.5	27 350	4.5	MR C2I 200 - N250TC 254 TC	4 53.9
	38.4	23 150	2.8	MR C2I 160 - N250TC 254 TC	4 45.6
	38.5	23 050	3.35	MR C2I 180 - N250TC 254 TC	4 45.4
	46.0	19 750	1.12	MR CI 125 - N280TC 284 TC	6 25.0
	46.7	19 450	2.24	MR CI 160 - N280TC 284 TC	6 24.6
	44.3	20 050	3	MR C2I 160 - N250TC 254 TC	4 39.5
	42.7	20 800	3.55	MR C2I 180 - N250TC 254 TC	4 41.0

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
15	46.7	19 000	3	MR C2I 160 - N250TC 254 TC	4 37.5
	46.9	18 950	4.25	MR C2I 180 - N250TC 254 TC	4 37.3
	56.0	16 200	1.12	MR CI 125 - N250TC 254 TC	4 31.3
	57.5	15 800	1.4	MR CI 125 - N280TC 284 TC	6 20.0
	57.5	15 800	1.9	MR CI 140 - N280TC 284 TC	6 20.0
	56.9	15 950	2.12	MR CI 160 - N250TC 254 TC	4 30.8
	53.9	16 500	3.35	MR C2I 160 - N250TC 254 TC	4 32.5
	63.9	14 200	2.12	MR CI 140 - N280TC 284 TC	6 18.0
	63.9	14 200	3.35	MR CI 160 - N280TC 284 TC	6 18.0
	58.9	15 100	3.75	MR C2I 160 - N250TC 254 TC	4 29.7
	70.0	12 950	1.7	MR CI 125 - N250TC 254 TC	4 25.0
	72.9	12 450	2.5	MR CI 140 - N280TC 284 TC	6 15.8
	71.1	12 750	3.35	MR CI 160 - N250TC 254 TC	4 24.6
	81.0	11 200	2.8	MR CI 140 - N280TC 284 TC	6 14.2
	81.0	11 200	4.5	MR CI 160 - N280TC 284 TC	6 14.2
	87.5	10 350	2.12	MR CI 125 - N250TC 254 TC	4 20.0
	87.5	10 350	2.8	MR CI 140 - N250TC 254 TC	4 20.0
	88.9	10 200	4.5	MR CI 160 - N250TC 254 TC	4 19.7
	97.2	9 330	3.15	MR CI 140 - N250TC 254 TC	4 18.0
	109	8 300	2.5	MR CI 125 - N250TC 254 TC	4 16.0
	111	8 180	3.55	MR CI 140 - N250TC 254 TC	4 15.8
	123	7 360	4.25	MR CI 140 - N250TC 254 TC	4 14.2
	139	6 540	3.55	MR CI 125 - N250TC 254 TC	4 12.6
	152	5 960	4.25	MR CI 140 - N250TC 254 TC	4 11.5
	169	5 370	3.75	MR CI 125 - N250TC 254 TC	4 10.4
	219	4 140	3.75	MR CI 125 - N250TC 254 TC	4 7.98
	277	3 270	3.75	MR CI 125 - N250TC 254 TC	4 6.31
20	7.37	160 800	1.06	MR C2I 225 - N280TC 286 TC	6 156
	7.36	161 000	1.5	MR C2I 250 - N280TC 286 TC	6 156
	7.48	158 500	2	MR C2I 280 - N280TC 286 TC	6 154
	9.04	131 000	1	MR C2I 200 - N280TC 286 TC	6 127
	9.18	129 100	1.18	MR C2I 225 - N280TC 286 TC	6 125
	9.34	126 800	2.12	MR C2I 250 - N280TC 286 TC	6 123
	9.17	129 200	2.5	MR C2I 280 - N280TC 286 TC	6 125
	11.1	107 000	0.8	MR C2I 180 - N280TC 286 TC	6 104
	11.6	102 600	1.06	MR C2I 200 - N250TC 256 TC	4 151
	11.3	104 800	1.25	MR C2I 200 - N280TC 286 TC	6 102
	11.2	105 700	1.5	MR C2I 225 - N250TC 256 TC	4 156
	11.2	105 800	2.12	MR C2I 250 - N250TC 256 TC	4 156
	11.7	101 400	2.5	MR C2I 250 - N280TC 286 TC	6 98.5
	11.4	104 200	2.8	MR C2I 280 - N250TC 256 TC	4 154
	11.5	103 400	3.35	MR C2I 280 - N280TC 286 TC	6 100
	12.8	92 750	0.8	MR C2I 180 - N280TC 286 TC	6 90.0
	13.1	90 600	1.5	MR C2I 200 - N280TC 286 TC	6 87.9
	12.7	93 000	1.8	MR C2I 225 - N280TC 286 TC	6 90.3
	12.9	91 700	2.8	MR C2I 250 - N280TC 286 TC	6 89.0
	12.8	92 400	3.75	MR C2I 280 - N280TC 286 TC	6 89.7
	13.5	87 900	0.95	MR C2I 180 - N250TC 256 TC	4 130
	13.8	86 100	1.5	MR C2I 200 - N250TC 256 TC	4 127
	14.0	84 800	1.8	MR C2I 225 - N250TC 256 TC	4 125
	14.2	83 350	3	MR C2I 250 - N250TC 256 TC	4 123
	14.0	84 950	3.75	MR C2I 280 - N250TC 256 TC	4 125
	15.9	74 500	0.9	MR C2I 160 - N280TC 286 TC	6 72.3
	16.0	74 200	1	MR C2I 180 - N280TC 286 TC	6 72.0
	16.4	72 450	1.8	MR C2I 200 - N280TC 286 TC	6 70.3
	15.9	74 400	2.36	MR C2I 225 - N280TC 286 TC	6 72.2
	16.2	73 350	3.55	MR C2I 250 - N280TC 286 TC	6 71.2
	16.9	69 950	0.9	MR C2I 160 - N250TC 256 TC	4 103
	16.9	70 300	1.18	MR C2I 180 - N250TC 256 TC	4 104
	17.2	68 900	1.8	MR C2I 200 - N250TC 256 TC	4 102
	17.5	67 850	2.5	MR C2I 225 - N250TC 256 TC	4 100
	17.8	66 650	3.75	MR C2I 250 - N250TC 256 TC	4 98.5


1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
20	19.4	61 200	1.12	MR C2I 160 - N250TC 256 TC	4 90.4
	19.4	60 950	1.18	MR C2I 180 - N250TC 256 TC	4 90.0
	19.9	59 500	2.12	MR C2I 200 - N250TC 256 TC	4 87.9
	19.4	61 100	2.65	MR C2I 225 - N250TC 256 TC	4 90.3
	19.7	60 250	4.25	MR C2I 250 - N250TC 256 TC	4 89.0
	21.2	55 950	1.12	MR C2I 160 - N250TC 256 TC	4 82.7
	21.1	56 250	1.5	MR C2I 180 - N250TC 256 TC	4 83.1
	21.5	55 100	2.24	MR C2I 200 - N250TC 256 TC	4 81.4
	21.8	54 300	3	MR C2I 225 - N250TC 256 TC	4 80.2
	22.2	53 350	4.5	MR C2I 250 - N250TC 256 TC	4 78.8
	24.2	48 950	1.32	MR C2I 160 - N250TC 256 TC	4 72.3
	24.3	48 750	1.5	MR C2I 180 - N250TC 256 TC	4 72.0
	24.9	47 600	2.65	MR C2I 200 - N250TC 256 TC	4 70.3
	24.2	48 900	3.15	MR C2I 225 - N250TC 256 TC	4 72.2
	26.8	44 150	1.4	MR C2I 160 - N250TC 256 TC	4 65.2
	29.1	40 750	1.7	MR C2I 160 - N280TC 286 TC	6 39.5
	26.7	44 350	1.8	MR C2I 180 - N250TC 256 TC	4 65.5
	27.3	43 450	2.8	MR C2I 200 - N250TC 256 TC	4 64.2
	27.7	42 800	3.75	MR C2I 225 - N250TC 256 TC	4 63.2
	30.7	38 600	1.7	MR C2I 160 - N250TC 256 TC	4 57.0
	30.8	38 450	1.9	MR C2I 180 - N250TC 256 TC	4 56.8
	31.6	37 550	3.35	MR C2I 200 - N250TC 256 TC	4 55.5
	37.4	32 400	1.06	MR CI 160 - N280TC 286 TC	6 30.8
	33.6	35 300	1.7	MR C2I 160 - N250TC 256 TC	4 52.1
	33.4	35 500	2.24	MR C2I 180 - N250TC 256 TC	4 52.4
	32.5	36 500	3.35	MR C2I 200 - N250TC 256 TC	4 53.9
	38.4	30 900	2.12	MR C2I 160 - N250TC 256 TC	4 45.6
	38.5	30 750	2.65	MR C2I 180 - N250TC 256 TC	4 45.4
	37.6	31 500	3.75	MR C2I 200 - N250TC 256 TC	4 46.6
	46.0	26 300	0.85	MR CI 125 - N280TC 286 TC	6 25.0
	46.7	25 900	1.6	MR CI 160 - N280TC 286 TC	6 24.6
	44.3	26 750	2.24	MR C2I 160 - N250TC 256 TC	4 39.5
	42.7	27 750	2.65	MR C2I 180 - N250TC 256 TC	4 41.0
	41.1	28 850	4	MR C2I 200 - N250TC 256 TC	4 42.6
	46.7	25 350	2.24	MR C2I 160 - N250TC 256 TC	4 37.5
	46.9	25 250	3.15	MR C2I 180 - N250TC 256 TC	4 37.3
	56.0	21 600	0.85	MR CI 125 - N250TC 256 TC	4 31.3
	57.5	21 050	1.06	MR CI 125 - N280TC 286 TC	6 20.0
	57.5	21 050	1.5	MR CI 140 - N280TC 286 TC	6 20.0
	56.9	21 300	1.6	MR CI 160 - N250TC 256 TC	4 30.8
	58.4	20 700	2.36	MR CI 160 - N280TC 286 TC	6 19.7
	53.9	22 000	2.5	MR C2I 160 - N250TC 256 TC	4 32.5
	56.7	21 350	2.8	MR CI 180 - N280TC 286 TC	6 20.3
	52.0	22 800	3.15	MR C2I 180 - N250TC 256 TC	4 33.7
	63.9	18 950	1.6	MR CI 140 - N280TC 286 TC	6 18.0
	63.9	18 950	2.5	MR CI 160 - N280TC 286 TC	6 18.0
	58.9	20 100	2.8	MR C2I 160 - N250TC 256 TC	4 29.7
	59.2	20 000	4	MR C2I 180 - N250TC 256 TC	4 29.6
	70.0	17 300	1.25	MR CI 125 - N250TC 256 TC	4 25.0
	72.9	16 600	1.8	MR CI 140 - N280TC 286 TC	6 15.8
	71.1	17 000	2.5	MR CI 160 - N250TC 256 TC	4 24.6
	68.0	17 450	3.15	MR C2I 160 - N250TC 256 TC	4 25.7
	81.0	14 950	2.12	MR CI 140 - N280TC 286 TC	6 14.2
	81.0	14 950	3.35	MR CI 160 - N280TC 286 TC	6 14.2
	87.5	13 850	1.6	MR CI 125 - N250TC 256 TC	4 20.0
	91.2	13 250	1.8	MR CI 125 - N280TC 286 TC	6 12.6
	87.5	13 850	2.12	MR CI 140 - N250TC 256 TC	4 20.0
	88.9	13 600	3.35	MR CI 160 - N250TC 256 TC	4 19.7
	97.2	12 450	2.5	MR CI 140 - N250TC 256 TC	4 18.0
	97.2	12 450	3.75	MR CI 160 - N250TC 256 TC	4 18.0
	109	11 050	1.9	MR CI 125 - N250TC 256 TC	4 16.0
	111	10 900	2.65	MR CI 140 - N250TC 256 TC	4 15.8
	106	11 450	3.75	MR CI 160 - N250TC 256 TC	4 16.5
	123	9 810	3.15	MR CI 140 - N250TC 256 TC	4 14.2

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
20	139	8 720	2.65	MR CI 125 - N250TC 256 TC	4 12.6
	136	8 890	3.15	MR CI 140 - N250TC 256 TC	4 12.9
	152	7 940	3.15	MR CI 140 - N250TC 256 TC	4 11.5
	169	7 170	2.8	MR CI 125 - N250TC 256 TC	4 10.4
	178	6 820	3.15	MR CI 140 - N250TC 256 TC	4 9.86
	219	5 520	2.8	MR CI 125 - N250TC 256 TC	4 7.98
	227	5 330	5.3	MR CI 160 - N250TC 256 TC	4 7.71
	277	4 360	2.8	MR CI 125 - N250TC 256 TC	4 6.31
	284	4 260	5.3	MR CI 160 - N250TC 256 TC	4 6.16
25	7.37	201 000	0.85	MR C2I 225 - N320TC 324 TC	6 156
	7.36	201 200	1.18	MR C2I 250 - N320TC 324 TC	6 156
	7.48	198 100	1.6	MR C2I 280 - N320TC 324 TC	6 154
	7.36	201 200	2	MR C2I 320 - N320TC 324 TC	6 156
	7.36	201 200	2.5	MR C2I 321 - N320TC 324 TC	6 156
	7.15	207 300	3.15	MR C2I 360 - N320TC 324 TC	6 161
	9.04	163 800	0.8	MR C2I 200 - N320TC 324 TC	6 127
	9.18	161 300	0.95	MR C2I 225 - N320TC 324 TC	6 125
	9.34	158 500	1.7	MR C2I 250 - N320TC 324 TC	6 123
	9.17	161 600	2	MR C2I 280 - N320TC 324 TC	6 125
	8.91	166 200	2.8	MR C2I 320 - N320TC 324 TC	6 129
	8.91	166 200	3.55	MR C2I 321 - N320TC 324 TC	6 129
	11.6	128 200	0.85	MR C2I 200 - N280TC 284 TC	4 151
	11.3	131 000	1	MR C2I 200 - N320TC 324 TC	6 102
	11.2	132 100	1.18	MR C2I 225 - N280TC 284 TC	4 156
	11.5	129 100	1.32	MR C2I 225 - N320TC 324 TC	6 100
	11.2	132 200	1.7	MR C2I 250 - N280TC 284 TC	4 156
	11.7	126 800	2	MR C2I 250 - N320TC 324 TC	6 98.5
	11.4	130 200	2.24	MR C2I 280 - N280TC 284 TC	4 154
	11.5	129 200	2.65	MR C2I 280 - N320TC 324 TC	6 100
	11.1	133 000	3.35	MR C2I 320 - N320TC 324 TC	6 103
	13.1	113 200	1.18	MR C2I 200 - N320TC 324 TC	6 87.9
	12.7	116 200	1.5	MR C2I 225 - N320TC 324 TC	6 90.3
	12.9	114 600	2.36	MR C2I 250 - N320TC 324 TC	6 89.0
	12.8	115 500	3	MR C2I 280 - N320TC 324 TC	6 89.7
	13.8	107 600	1.18	MR C2I 200 - N280TC 284 TC	4 127
	14.0	106 000	1.5	MR C2I 225 - N280TC 284 TC	4 125
	14.3	103 300	1.7	MR C2I 225 - N320TC 324 TC	6 80.2
	14.2	104 200	2.36	MR C2I 250 - N280TC 284 TC	4 123
	14.0	106 200	3	MR C2I 280 - N280TC 284 TC	4 125
	16.4	90 600	1.5	MR C2I 200 - N320TC 324 TC	6 70.3
	15.9	93 000	1.9	MR C2I 225 - N320TC 324 TC	6 72.2
	16.2	91 700	2.8	MR C2I 250 - N320TC 324 TC	6 71.2
	16.0	92 400	4	MR C2I 280 - N320TC 324 TC	6 71.7
	16.9	87 900	0.95	MR C2I 180 - N280TC 284 TC	4 104
	17.2	86 100	1.4	MR C2I 200 - N280TC 284 TC	4 102
	17.5	84 800	2	MR C2I 225 - N280TC 284 TC	4 100
	17.8	83 350	3	MR C2I 250 - N280TC 284 TC	4 98.5
	17.4	84 950	3.75	MR C2I 280 - N280TC 284 TC	4 100
	19.4	76 500	0.85	MR C2I 160 - N280TC 284 TC	4 90.4
	19.4	76 150	0.95	MR C2I 180 - N280TC 284 TC	4 90.0
	19.9	74 400	1.7	MR C2I 200 - N280TC 284 TC	4 87.9
	19.4	76 400	2.12	MR C2I 225 - N280TC 284 TC	4 90.3
	19.7	75 300	3.35	MR C2I 250 - N280TC 284 TC	4 89.0
	21.2	69 950	0.85	MR C2I 160 - N280TC 284 TC	4 82.7
	21.1	70 300	1.18	MR C2I 180 - N280TC 284 TC	4 83.1
	21.5	68 900	1.8	MR C2I 200 - N280TC 284 TC	4 81.4
	21.8	67 850	2.5	MR C2I 225 - N280TC 284 TC	4 80.2
	22.2	66 650	3.55	MR C2I 250 - N280TC 284 TC	4 78.8
	24.2	61 200	1.06	MR C2I 160 - N280TC 284 TC	4 72.3
	24.3	60 950	1.18	MR C2I 180 - N280TC 284 TC	4 72.0
	24.9	59 500	2.12	MR C2I 200 - N280TC 284 TC	4 70.3
	24.2	61 100	2.65	MR C2I 225 - N280TC 284 TC	4 72.2
	24.6	60 250	4	MR C2I 250 - N280TC 284 TC	4 71.2


1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.
2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
25	26.8	55 150	1.12	MR C2I 160 - N280TC 284 TC	4 65.2
	26.7	55 450	1.5	MR C2I 180 - N280TC 284 TC	4 65.5
	27.3	54 300	2.24	MR C2I 200 - N280TC 284 TC	4 64.2
	27.7	53 500	3	MR C2I 225 - N280TC 284 TC	4 63.2
	30.7	48 250	1.4	MR C2I 160 - N280TC 284 TC	4 57.0
	30.8	48 050	1.5	MR C2I 180 - N280TC 284 TC	4 56.8
	31.6	46 950	2.65	MR C2I 200 - N280TC 284 TC	4 55.5
	30.7	48 200	3.35	MR C2I 225 - N280TC 284 TC	4 56.9
	37.4	40 450	0.85	MR CI 160 - N320TC 324 TC	6 30.8
	33.6	44 150	1.4	MR C2I 160 - N280TC 284 TC	4 52.1
	33.4	44 350	1.8	MR C2I 180 - N280TC 284 TC	4 52.4
	32.5	45 600	2.65	MR C2I 200 - N280TC 284 TC	4 53.9
	33.0	44 900	3.35	MR C2I 225 - N280TC 284 TC	4 53.1
	38.4	38 600	1.7	MR C2I 160 - N280TC 284 TC	4 45.6
	38.5	38 450	2.12	MR C2I 180 - N280TC 284 TC	4 45.4
	37.6	39 400	3	MR C2I 200 - N280TC 284 TC	4 46.6
	36.6	40 450	4	MR C2I 225 - N280TC 284 TC	4 47.8
	46.7	32 400	1.32	MR CI 160 - N320TC 324 TC	6 24.6
	44.3	33 450	1.8	MR C2I 160 - N280TC 284 TC	4 39.5
	42.7	34 700	2.12	MR C2I 180 - N280TC 284 TC	4 41.0
	46.7	32 400	2.65	MR CI 200 - N320TC 324 TC	6 24.6
	41.1	36 050	3.15	MR C2I 200 - N280TC 284 TC	4 42.6
	46.7	31 700	1.8	MR C2I 160 - N280TC 284 TC	4 37.5
	46.9	31 550	2.5	MR C2I 180 - N280TC 284 TC	4 37.3
	49.6	29 850	3.75	MR C2I 200 - N280TC 284 TC	4 35.3
	56.9	26 600	1.32	MR CI 160 - N280TC 284 TC	4 30.8
	58.4	25 900	1.9	MR CI 160 - N320TC 324 TC	6 19.7
	53.9	27 500	2	MR C2I 160 - N280TC 284 TC	4 32.5
	56.7	26 700	2.24	MR CI 180 - N320TC 324 TC	6 20.3
	52.0	28 500	2.5	MR C2I 180 - N280TC 284 TC	4 33.7
	56.9	26 600	2.65	MR CI 200 - N280TC 284 TC	4 30.8
	58.4	25 900	4	MR CI 200 - N320TC 324 TC	6 19.7
	54.2	27 300	4	MR C2I 200 - N280TC 284 TC	4 32.3
	63.9	23 700	2	MR CI 160 - N320TC 324 TC	6 18.0
	58.9	25 150	2.36	MR C2I 160 - N280TC 284 TC	4 29.7
	61.6	24 550	2.5	MR CI 180 - N320TC 324 TC	6 18.7
	59.2	25 050	3.15	MR C2I 180 - N280TC 284 TC	4 29.6
	70.0	21 600	1	MR CI 125 - N280TC 284 TC	4 25.0
	71.1	21 300	2	MR CI 160 - N280TC 284 TC	4 24.6
	68.0	21 800	2.5	MR C2I 160 - N280TC 284 TC	4 25.7
	71.9	21 050	3	MR CI 180 - N320TC 324 TC	6 16.0
	65.6	22 600	3.15	MR C2I 180 - N280TC 284 TC	4 26.7
	71.1	21 300	4	MR CI 200 - N280TC 284 TC	4 24.6
	81.0	18 650	2.65	MR CI 160 - N320TC 324 TC	6 14.2
	78.1	19 350	3.35	MR CI 180 - N320TC 324 TC	6 14.7
	87.5	17 300	1.32	MR CI 125 - N280TC 284 TC	4 20.0
	87.5	17 300	1.7	MR CI 140 - N280TC 284 TC	4 20.0
	88.9	17 000	2.65	MR CI 160 - N280TC 284 TC	4 19.7
	88.2	17 150	3	MR CI 160 - N320TC 324 TC	6 13.0
	86.3	17 550	3.35	MR CI 180 - N280TC 284 TC	4 20.3
	97.2	15 550	1.9	MR CI 140 - N280TC 284 TC	4 18.0
	97.2	15 550	3	MR CI 160 - N280TC 284 TC	4 18.0
	93.8	16 150	4	MR CI 180 - N280TC 284 TC	4 18.7
	109	13 850	1.5	MR CI 125 - N280TC 284 TC	4 16.0
	111	13 650	2.12	MR CI 140 - N280TC 284 TC	4 15.8
	106	14 300	3	MR CI 160 - N280TC 284 TC	4 16.5
	109	13 800	4.5	MR CI 180 - N280TC 284 TC	4 16.0
	123	12 250	2.5	MR CI 140 - N280TC 284 TC	4 14.2
	123	12 250	4	MR CI 160 - N280TC 284 TC	4 14.2
	139	10 900	2.12	MR CI 125 - N280TC 284 TC	4 12.6
	136	11 100	2.5	MR CI 140 - N280TC 284 TC	4 12.9
	134	11 250	4.25	MR CI 160 - N280TC 284 TC	4 13.0
	152	9 930	2.5	MR CI 140 - N280TC 284 TC	4 11.5
	153	9 860	4.25	MR CI 160 - N280TC 284 TC	4 11.4

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
25	169	8 960	2.24	MR CI 125 - N280TC 284 TC	4 10.4
	178	8 520	2.5	MR CI 140 - N280TC 284 TC	4 9.86
	177	8 540	4.25	MR CI 160 - N280TC 284 TC	4 9.88
	219	6 900	2.24	MR CI 125 - N280TC 284 TC	4 7.98
	227	6 660	4.25	MR CI 160 - N280TC 284 TC	4 7.71
	277	5 450	2.24	MR CI 125 - N280TC 284 TC	4 6.31
	284	5 320	4.25	MR CI 160 - N280TC 284 TC	4 6.16
	7.36	241 400	1	MR C2I 250 - N320TC 326 TC	6 156
	7.48	237 800	1.32	MR C2I 280 - N320TC 326 TC	6 154
	7.36	241 400	1.6	MR C2I 320 - N320TC 326 TC	6 156
30	7.36	241 400	2	MR C2I 321 - N320TC 326 TC	6 156
	7.15	248 700	2.65	MR C2I 360 - N320TC 326 TC	6 161
	9.18	193 600	0.8	MR C2I 225 - N320TC 326 TC	6 125
	9.34	190 200	1.4	MR C2I 250 - N320TC 326 TC	6 123
	9.17	193 900	1.6	MR C2I 280 - N320TC 326 TC	6 125
	8.91	199 400	2.36	MR C2I 320 - N320TC 326 TC	6 129
	8.91	199 400	3	MR C2I 321 - N320TC 326 TC	6 129
	11.3	157 200	0.85	MR C2I 200 - N320TC 326 TC	6 102
	11.2	158 500	1	MR C2I 225 - N280TC 286 TC	4 156
	11.2	158 700	1.4	MR C2I 250 - N280TC 286 TC	4 156
	11.7	152 200	1.7	MR C2I 250 - N320TC 326 TC	6 98.5
	11.4	156 200	1.9	MR C2I 280 - N280TC 286 TC	4 154
	11.1	159 500	2.8	MR C2I 320 - N320TC 326 TC	6 103
	11.1	159 500	3.55	MR C2I 321 - N320TC 326 TC	6 103
	13.1	135 900	1	MR C2I 200 - N320TC 326 TC	6 87.9
	12.7	139 500	1.18	MR C2I 225 - N320TC 326 TC	6 90.3
	12.9	137 500	1.9	MR C2I 250 - N320TC 326 TC	6 89.0
	12.8	138 600	2.5	MR C2I 280 - N320TC 326 TC	6 89.7
	12.9	137 300	3.15	MR C2I 320 - N320TC 326 TC	6 88.8
	13.8	129 200	0.95	MR C2I 200 - N280TC 286 TC	4 127
	14.0	127 200	1.18	MR C2I 225 - N280TC 286 TC	4 125
	14.3	123 900	1.4	MR C2I 225 - N320TC 326 TC	6 80.2
	14.2	125 000	2	MR C2I 250 - N280TC 286 TC	4 123
	14.0	127 400	2.5	MR C2I 280 - N280TC 286 TC	4 125
	16.4	108 700	1.25	MR C2I 200 - N320TC 326 TC	6 70.3
	15.9	111 600	1.5	MR C2I 225 - N320TC 326 TC	6 72.2
	16.2	110 000	2.36	MR C2I 250 - N320TC 326 TC	6 71.2
	16.0	110 900	3.15	MR C2I 280 - N320TC 326 TC	6 71.7
	16.9	105 500	0.8	MR C2I 180 - N280TC 286 TC	4 104
	17.2	103 300	1.18	MR C2I 200 - N280TC 286 TC	4 102
	17.5	101 800	1.6	MR C2I 225 - N280TC 286 TC	4 100
	17.8	100 000	2.5	MR C2I 250 - N280TC 286 TC	4 98.5
	17.4	101 900	3.15	MR C2I 280 - N280TC 286 TC	4 100
	19.4	91 400	0.8	MR C2I 180 - N280TC 286 TC	4 90.0
	19.9	89 300	1.4	MR C2I 200 - N280TC 286 TC	4 87.9
	19.4	91 650	1.7	MR C2I 225 - N280TC 286 TC	4 90.3
	19.7	90 400	2.8	MR C2I 250 - N280TC 286 TC	4 89.0
	19.5	91 050	3.75	MR C2I 280 - N280TC 286 TC	4 89.7
	21.1	84 350	1	MR C2I 180 - N280TC 286 TC	4 83.1
	21.5	82 650	1.5	MR C2I 200 - N280TC 286 TC	4 81.4
	21.8	81 450	2	MR C2I 225 - N280TC 286 TC	4 80.2
	22.2	80 000	3	MR C2I 250 - N280TC 286 TC	4 78.8
	21.8	81 550	3.75	MR C2I 280 - N280TC 286 TC	4 80.3
	24.2	73 450	0.9	MR C2I 160 - N280TC 286 TC	4 72.3
	24.3	73 100	1	MR C2I 180 - N280TC 286 TC	4 72.0
	24.9	71 450	1.8	MR C2I 200 - N280TC 286 TC	4 70.3
	24.2	73 350	2.12	MR C2I 225 - N280TC 286 TC	4 72.2
	24.6	72 300	3.35	MR C2I 250 - N280TC 286 TC	4 71.2
	26.8	66 200	0.9	MR C2I 160 - N280TC 286 TC	4 65.2
	26.7	66 550	1.25	MR C2I 180 - N280TC 286 TC	4 65.5
	27.3	65 200	1.8	MR C2I 200 - N280TC 286 TC	4 64.2
	27.7	64 200	2.5	MR C2I 225 - N280TC 286 TC	4 63.2
	28.2	63 100	3.75	MR C2I 250 - N280TC 286 TC	4 62.1

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
30	30.7	57 900	1.12	MR C2I 160 - N280TC 286 TC	4 57.0
	30.8	57 650	1.25	MR C2I 180 - N280TC 286 TC	4 56.8
	31.6	56 300	2.24	MR C2I 200 - N280TC 286 TC	4 55.5
	30.7	57 800	2.8	MR C2I 225 - N280TC 286 TC	4 56.9
	31.2	57 000	4.25	MR C2I 250 - N280TC 286 TC	4 56.1
	33.6	52 950	1.12	MR C2I 160 - N280TC 286 TC	4 52.1
	33.4	53 200	1.5	MR C2I 180 - N280TC 286 TC	4 52.4
	32.5	54 700	2.24	MR C2I 200 - N280TC 286 TC	4 53.9
	33.0	53 900	2.8	MR C2I 225 - N280TC 286 TC	4 53.1
	33.6	52 950	4.5	MR C2I 250 - N280TC 286 TC	4 52.1
	38.4	46 300	1.4	MR C2I 160 - N280TC 286 TC	4 45.6
	38.5	46 100	1.7	MR C2I 180 - N280TC 286 TC	4 45.4
	37.6	47 300	2.5	MR C2I 200 - N280TC 286 TC	4 46.6
	36.6	48 550	3.35	MR C2I 225 - N280TC 286 TC	4 47.8
	46.7	38 850	1.12	MR CI 160 - N320TC 326 TC	6 24.6
	44.3	40 150	1.5	MR C2I 160 - N280TC 286 TC	4 39.5
	42.7	41 650	1.8	MR C2I 180 - N280TC 286 TC	4 41.0
	46.7	38 850	2.24	MR CI 200 - N320TC 326 TC	6 24.6
	41.1	43 250	2.65	MR C2I 200 - N280TC 286 TC	4 42.6
	42.3	42 050	3.75	MR C2I 225 - N280TC 286 TC	4 41.4
	46.7	38 050	1.5	MR C2I 160 - N280TC 286 TC	4 37.5
	46.9	37 900	2.12	MR C2I 180 - N280TC 286 TC	4 37.3
	49.6	35 850	3.15	MR C2I 200 - N280TC 286 TC	4 35.3
	48.3	36 800	4.25	MR C2I 225 - N280TC 286 TC	4 36.2
	56.9	31 900	1.06	MR CI 160 - N280TC 286 TC	4 30.8
	58.4	31 100	1.6	MR CI 160 - N320TC 326 TC	6 19.7
	53.9	33 000	1.7	MR C2I 160 - N280TC 286 TC	4 32.5
	56.7	32 000	1.9	MR CI 180 - N320TC 326 TC	6 20.3
	52.0	34 200	2.12	MR C2I 180 - N280TC 286 TC	4 33.7
	56.9	31 900	2.24	MR CI 200 - N280TC 286 TC	4 30.8
	54.2	32 800	3.35	MR C2I 200 - N280TC 286 TC	4 32.3
	63.9	28 400	1.7	MR CI 160 - N320TC 326 TC	6 18.0
	58.9	30 150	1.9	MR C2I 160 - N280TC 286 TC	4 29.7
	61.6	29 450	2.12	MR CI 180 - N320TC 326 TC	6 18.7
	59.2	30 050	2.65	MR C2I 180 - N280TC 286 TC	4 29.6
	62.6	28 400	4	MR C2I 200 - N280TC 286 TC	4 28.0
	70.0	25 950	0.85	MR CI 125 - N280TC 286 TC	4 25.0
	71.1	25 550	1.6	MR CI 160 - N280TC 286 TC	4 24.6
	68.0	26 150	2.12	MR C2I 160 - N280TC 286 TC	4 25.7
	71.9	25 250	2.5	MR CI 180 - N320TC 326 TC	6 16.0
	65.6	27 100	2.65	MR C2I 180 - N280TC 286 TC	4 26.7
	71.1	25 550	3.35	MR CI 200 - N280TC 286 TC	4 24.6
	81.0	22 400	2.24	MR CI 160 - N320TC 326 TC	6 14.2
	78.1	23 250	2.8	MR CI 180 - N320TC 326 TC	6 14.7
	81.0	22 400	4.5	MR CI 200 - N320TC 326 TC	6 14.2
	87.5	20 750	1.06	MR CI 125 - N280TC 286 TC	4 20.0
	87.5	20 750	1.4	MR CI 140 - N280TC 286 TC	4 20.0
	88.9	20 450	2.24	MR CI 160 - N280TC 286 TC	4 19.7
	86.3	21 050	2.8	MR CI 180 - N280TC 286 TC	4 20.3
	88.9	20 450	4.5	MR CI 200 - N280TC 286 TC	4 19.7
	97.2	18 650	1.6	MR CI 140 - N280TC 286 TC	4 18.0
	97.2	18 650	2.5	MR CI 160 - N280TC 286 TC	4 18.0
	93.8	19 350	3.15	MR CI 180 - N280TC 286 TC	4 18.7
	109	16 600	1.25	MR CI 125 - N280TC 286 TC	4 16.0
	111	16 350	1.8	MR CI 140 - N280TC 286 TC	4 15.8
	106	17 150	2.5	MR CI 160 - N280TC 286 TC	4 16.5
	109	16 600	3.75	MR CI 180 - N280TC 286 TC	4 16.0
	123	14 700	2.12	MR CI 140 - N280TC 286 TC	4 14.2
	123	14 700	3.35	MR CI 160 - N280TC 286 TC	4 14.2
	139	13 100	1.8	MR CI 125 - N280TC 286 TC	4 12.6
	136	13 350	2.12	MR CI 140 - N280TC 286 TC	4 12.9
	134	13 500	3.55	MR CI 160 - N280TC 286 TC	4 13.0
	152	11 900	2.12	MR CI 140 - N280TC 286 TC	4 11.5
	153	11 850	3.55	MR CI 160 - N280TC 286 TC	4 11.4

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
30	169	10 750	1.8	MR CI 125 - N280TC 286 TC	4 10.4
	178	10 200	2.12	MR CI 140 - N280TC 286 TC	4 9.86
	177	10 250	3.55	MR CI 160 - N280TC 286 TC	4 9.88
	219	8 270	1.8	MR CI 125 - N280TC 286 TC	4 7.98
	227	8 000	3.55	MR CI 160 - N280TC 286 TC	4 7.71
	277	6 540	1.8	MR CI 125 - N280TC 286 TC	4 6.31
	284	6 390	3.55	MR CI 160 - N280TC 286 TC	4 6.16
40	7.48	317 000	1	MR C2I 280 - N360TC 364 TC	6 154
	7.36	321 900	1.18	MR C2I 320 - N360TC 364 TC	6 156
	7.36	321 900	1.5	MR C2I 321 - N360TC 364 TC	6 156
	7.15	331 600	2	MR C2I 360 - N360TC 364 TC	6 161
	9.34	253 600	1.06	MR C2I 250 - N360TC 364 TC	6 123
	9.17	258 500	1.25	MR C2I 280 - N360TC 364 TC	6 125
	8.91	265 900	1.8	MR C2I 320 - N360TC 364 TC	6 129
	8.91	265 900	2.24	MR C2I 321 - N360TC 364 TC	6 129
	9.06	261 500	2.5	MR C2I 360 - N360TC 364 TC	6 127
	11.2	211 500	1.06	MR C2I 250 - N320TC 324 TC	4 156
	11.7	202 900	1.32	MR C2I 250 - N360TC 364 TC	6 98.5
	11.4	208 300	1.4	MR C2I 280 - N320TC 324 TC	4 154
	11.2	211 500	1.7	MR C2I 320 - N320TC 324 TC	4 156
	11.1	212 700	2.12	MR C2I 320 - N360TC 364 TC	6 103
	11.2	211 500	2.12	MR C2I 321 - N320TC 324 TC	4 156
	11.1	212 700	2.65	MR C2I 321 - N360TC 364 TC	6 103
	10.9	217 900	3	MR C2I 360 - N320TC 324 TC	4 161
	12.9	183 400	1.4	MR C2I 250 - N360TC 364 TC	6 89.0
	12.8	184 800	1.9	MR C2I 280 - N360TC 364 TC	6 89.7
	12.9	183 100	2.36	MR C2I 320 - N360TC 364 TC	6 88.8
	12.9	183 100	2.8	MR C2I 321 - N360TC 364 TC	6 88.8
	12.6	188 300	3.55	MR C2I 360 - N360TC 364 TC	6 91.4
	14.0	169 600	0.9	MR C2I 225 - N320TC 324 TC	4 125
	14.2	166 700	1.5	MR C2I 250 - N320TC 324 TC	4 123
	14.0	169 900	1.9	MR C2I 280 - N320TC 324 TC	4 125
	13.6	174 700	2.5	MR C2I 320 - N320TC 324 TC	4 129
	13.6	174 700	3.15	MR C2I 321 - N320TC 324 TC	4 129
	16.2	146 700	1.7	MR C2I 250 - N360TC 364 TC	6 71.2
	16.0	147 800	2.36	MR C2I 280 - N360TC 364 TC	6 71.7
	16.2	146 500	2.8	MR C2I 320 - N360TC 364 TC	6 71.1
	16.2	146 500	3.55	MR C2I 321 - N360TC 364 TC	6 71.1
	17.2	137 800	0.9	MR C2I 200 - N320TC 324 TC	4 102
	17.5	135 700	1.25	MR C2I 225 - N320TC 324 TC	4 100
	17.8	133 300	1.8	MR C2I 250 - N320TC 324 TC	4 98.5
	17.4	135 900	2.36	MR C2I 280 - N320TC 324 TC	4 100
	17.0	139 800	3	MR C2I 320 - N320TC 324 TC	4 103
	17.0	139 800	3.75	MR C2I 321 - N320TC 324 TC	4 103
	19.9	119 000	1.06	MR C2I 200 - N320TC 324 TC	4 87.9
	19.4	122 200	1.32	MR C2I 225 - N320TC 324 TC	4 90.3
	19.7	120 500	2.12	MR C2I 250 - N320TC 324 TC	4 89.0
	19.5	121 400	2.8	MR C2I 280 - N320TC 324 TC	4 89.7
	19.7	120 300	3.35	MR C2I 320 - N320TC 324 TC	4 88.8
	21.5	110 200	1.12	MR C2I 200 - N320TC 324 TC	4 81.4
	21.8	108 600	1.5	MR C2I 225 - N320TC 324 TC	4 80.2
	22.2	106 700	2.24	MR C2I 250 - N320TC 324 TC	4 78.8
	21.8	108 700	3	MR C2I 280 - N320TC 324 TC	4 80.3
	21.2	111 800	3.75	MR C2I 320 - N320TC 324 TC	4 82.6
	24.9	95 250	1.32	MR C2I 200 - N320TC 324 TC	4 70.3
	24.2	97 800	1.6	MR C2I 225 - N320TC 324 TC	4 72.2
	24.6	96 400	2.65	MR C2I 250 - N320TC 324 TC	4 71.2
	24.4	97 150	3.35	MR C2I 280 - N320TC 324 TC	4 71.7
	27.3	86 900	1.4	MR C2I 200 - N320TC 324 TC	4 64.2
	27.7	85 600	1.9	MR C2I 225 - N320TC 324 TC	4 63.2
	28.2	84 100	2.8	MR C2I 250 - N320TC 324 TC	4 62.1
	27.6	85 700	3.75	MR C2I 280 - N320TC 324 TC	4 63.3
	31.6	75 100	1.7	MR C2I 200 - N320TC 324 TC	4 55.5
	30.7	77 100	2	MR C2I 225 - N320TC 324 TC	4 56.9
	31.2	76 000	3.15	MR C2I 250 - N320TC 324 TC	4 56.1

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
40	37.4	64 750	1.12	MR CI 200 - N360TC 364 TC	6 30.8
	32.5	72 950	1.6	MR C2I 200 - N320TC 324 TC	4 53.9
	33.0	71 850	2.12	MR C2I 225 - N320TC 324 TC	4 53.1
	33.6	70 600	3.35	MR C2I 250 - N320TC 324 TC	4 52.1
	37.6	63 050	1.9	MR C2I 200 - N320TC 324 TC	4 46.6
	36.6	64 750	2.5	MR C2I 225 - N320TC 324 TC	4 47.8
	37.1	63 800	3.75	MR C2I 250 - N320TC 324 TC	4 47.1
	46.7	51 800	1.7	MR CI 200 - N360TC 364 TC	6 24.6
	41.1	57 650	2	MR C2I 200 - N320TC 324 TC	4 42.6
	42.3	56 050	2.8	MR C2I 225 - N320TC 324 TC	4 41.4
	40.9	58 000	4.25	MR C2I 250 - N320TC 324 TC	4 42.8
	49.6	47 800	2.36	MR C2I 200 - N320TC 324 TC	4 35.3
	48.3	49 050	3.15	MR C2I 225 - N320TC 324 TC	4 36.2
	56.9	42 550	0.8	MR CI 160 - N320TC 324 TC	4 30.8
	56.9	42 550	1.7	MR CI 200 - N320TC 324 TC	4 30.8
	58.4	41 450	2.36	MR CI 200 - N360TC 364 TC	6 19.7
	54.2	43 700	2.65	MR C2I 200 - N320TC 324 TC	4 32.3
	56.7	42 700	2.8	MR CI 225 - N360TC 364 TC	6 20.3
	55.8	42 500	3.15	MR C2I 225 - N320TC 324 TC	4 31.4
	63.9	37 900	2.5	MR CI 200 - N360TC 364 TC	6 18.0
	62.6	37 900	3	MR C2I 200 - N320TC 324 TC	4 28.0
	61.6	39 300	2.8	MR CI 225 - N360TC 364 TC	6 18.7
	60.9	38 900	4	MR C2I 225 - N320TC 324 TC	4 28.7
	71.1	34 050	1.25	MR CI 160 - N320TC 324 TC	4 24.6
	71.1	34 050	2.5	MR CI 200 - N320TC 324 TC	4 24.6
	68.4	34 650	3.15	MR C2I 200 - N320TC 324 TC	4 25.6
	81.0	29 850	3.35	MR CI 200 - N360TC 364 TC	6 14.2
	78.1	30 950	4.25	MR CI 225 - N360TC 364 TC	6 14.7
	78.4	30 900	4.75	MR CI 250 - N320TC 324 TC	4 22.3
	88.9	27 250	1.6	MR CI 160 - N320TC 324 TC	4 19.7
	86.3	28 050	2.12	MR CI 180 - N320TC 324 TC	4 20.3
	88.9	27 250	3.35	MR CI 200 - N320TC 324 TC	4 19.7
	97.2	24 900	1.9	MR CI 160 - N320TC 324 TC	4 18.0
	93.8	25 800	2.5	MR CI 180 - N320TC 324 TC	4 18.7
	97.2	24 900	3.75	MR CI 200 - N320TC 324 TC	4 18.0
	106	22 850	1.9	MR CI 160 - N320TC 324 TC	4 16.5
	109	22 100	2.8	MR CI 180 - N320TC 324 TC	4 16.0
	106	22 850	3.75	MR CI 200 - N320TC 324 TC	4 16.5
	123	19 650	2.5	MR CI 160 - N320TC 324 TC	4 14.2
	119	20 350	3.15	MR CI 180 - N320TC 324 TC	4 14.7
	134	18 050	2.65	MR CI 160 - N320TC 324 TC	4 13.0
	134	18 100	3.15	MR CI 180 - N320TC 324 TC	4 13.1
	153	15 750	2.65	MR CI 160 - N320TC 324 TC	4 11.4
	154	15 700	3.15	MR CI 180 - N320TC 324 TC	4 11.4
	177	13 650	2.65	MR CI 160 - N320TC 324 TC	4 9.88
	171	14 200	3.15	MR CI 180 - N320TC 324 TC	4 10.3
	227	10 650	2.65	MR CI 160 - N320TC 324 TC	4 7.71
	217	11 150	5.3	MR CI 200 - N320TC 324 TC	4 8.06
	284	8 520	2.65	MR CI 160 - N320TC 324 TC	4 6.16
	271	8 930	5.3	MR CI 200 - N320TC 324 TC	4 6.46

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
50	11.2	264 400	0.85	MR C2I 250 - N320TC 326 TC	4 156
	11.7	253 600	1	MR C2I 250 - N360TC 365 TC	6 98.5
	11.4	260 400	1.12	MR C2I 280 - N320TC 326 TC	4 154
	11.2	264 400	1.4	MR C2I 320 - N320TC 326 TC	4 156
	11.1	265 900	1.7	MR C2I 320 - N360TC 365 TC	6 103
	11.2	264 400	1.7	MR C2I 321 - N320TC 326 TC	4 156
	11.1	265 900	2.12	MR C2I 321 - N360TC 365 TC	6 103
	10.9	272 400	2.36	MR C2I 360 - N320TC 326 TC	4 161
	12.9	229 200	1.18	MR C2I 250 - N360TC 365 TC	6 89.0
	12.8	231 000	1.5	MR C2I 280 - N360TC 365 TC	6 89.7
	12.9	228 900	1.9	MR C2I 320 - N360TC 365 TC	6 88.8
	12.9	228 900	2.36	MR C2I 321 - N360TC 365 TC	6 88.8
	12.6	235 400	2.8	MR C2I 360 - N360TC 365 TC	6 91.4
	14.2	208 300	1.18	MR C2I 250 - N320TC 326 TC	4 123
	14.0	212 300	1.5	MR C2I 280 - N320TC 326 TC	4 125
	13.6	218 400	2	MR C2I 320 - N320TC 326 TC	4 129
	13.6	218 400	2.5	MR C2I 321 - N320TC 326 TC	4 129
	13.8	214 800	3	MR C2I 360 - N320TC 326 TC	4 127
	16.2	183 400	1.4	MR C2I 250 - N360TC 365 TC	6 71.2
	16.0	184 800	1.9	MR C2I 280 - N360TC 365 TC	6 71.7
	16.2	183 100	2.24	MR C2I 320 - N360TC 365 TC	6 71.1
	16.2	183 100	2.8	MR C2I 321 - N360TC 365 TC	6 71.1
	15.7	188 300	3.35	MR C2I 360 - N360TC 365 TC	6 73.1
	17.5	169 600	1	MR C2I 225 - N320TC 326 TC	4 100
	17.8	166 700	1.5	MR C2I 250 - N320TC 326 TC	4 98.5
	17.4	169 900	1.9	MR C2I 280 - N320TC 326 TC	4 100
	17.0	174 700	2.36	MR C2I 320 - N320TC 326 TC	4 103
	17.0	174 700	3	MR C2I 321 - N320TC 326 TC	4 103
	17.2	171 900	3.75	MR C2I 360 - N320TC 326 TC	4 102
	19.9	148 800	0.85	MR C2I 200 - N320TC 326 TC	4 87.9
	19.4	152 800	1.06	MR C2I 225 - N320TC 326 TC	4 90.3
	19.7	150 600	1.7	MR C2I 250 - N320TC 326 TC	4 89.0
	19.5	151 800	2.24	MR C2I 280 - N320TC 326 TC	4 89.7
	19.7	150 400	2.65	MR C2I 320 - N320TC 326 TC	4 88.8
	19.7	150 400	3.35	MR C2I 321 - N320TC 326 TC	4 88.8
	21.5	137 800	0.9	MR C2I 200 - N320TC 326 TC	4 81.4
	21.8	135 700	1.25	MR C2I 225 - N320TC 326 TC	4 80.2
	22.2	133 300	1.8	MR C2I 250 - N320TC 326 TC	4 78.8
	21.8	135 900	2.36	MR C2I 280 - N320TC 326 TC	4 80.3
	21.2	139 800	3	MR C2I 320 - N320TC 326 TC	4 82.6
	21.2	139 800	3.75	MR C2I 321 - N320TC 326 TC	4 82.6
	24.9	119 000	1.06	MR C2I 200 - N320TC 326 TC	4 70.3
	24.2	122 200	1.32	MR C2I 225 - N320TC 326 TC	4 72.2
	24.6	120 500	2	MR C2I 250 - N320TC 326 TC	4 71.2
	24.4	121 400	2.8	MR C2I 280 - N320TC 326 TC	4 71.7
	24.6	120 300	3.35	MR C2I 320 - N320TC 326 TC	4 71.1
	27.3	108 600	1.12	MR C2I 200 - N320TC 326 TC	4 64.2
	27.7	107 000	1.5	MR C2I 225 - N320TC 326 TC	4 63.2
	28.2	105 100	2.24	MR C2I 250 - N320TC 326 TC	4 62.1
	27.6	107 100	3	MR C2I 280 - N320TC 326 TC	4 63.3
	26.9	110 200	3.75	MR C2I 320 - N320TC 326 TC	4 65.1
	31.6	93 850	1.32	MR C2I 200 - N320TC 326 TC	4 55.5
	30.7	96 350	1.6	MR C2I 225 - N320TC 326 TC	4 56.9
	31.2	95 000	2.65	MR C2I 250 - N320TC 326 TC	4 56.1
	30.9	95 750	3.35	MR C2I 280 - N320TC 326 TC	4 56.6
	37.4	80 950	0.9	MR CI 200 - N360TC 365 TC	6 30.8
	32.5	91 200	1.32	MR C2I 200 - N320TC 326 TC	4 53.9
	33.0	89 850	1.7	MR C2I 225 - N320TC 326 TC	4 53.1
	33.6	88 250	2.8	MR C2I 250 - N320TC 326 TC	4 52.1
	32.9	89 950	3.35	MR C2I 280 - N320TC 326 TC	4 53.1
	37.6	78 800	1.5	MR C2I 200 - N320TC 326 TC	4 46.6
	36.6	80 900	2	MR C2I 225 - N320TC 326 TC	4 47.8
	37.1	79 800	3	MR C2I 250 - N320TC 326 TC	4 47.1
	36.9	80 400	4	MR C2I 280 - N320TC 326 TC	4 47.5

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
50	46.7	64 750	1.32	MR CI 200 - N360TC 365 TC	6 24.6
	41.1	72 100	1.6	MR C2I 200 - N320TC 326 TC	4 42.6
	42.3	70 100	2.24	MR C2I 225 - N320TC 326 TC	4 41.4
	45.3	66 800	2.65	MR CI 250 - N360TC 365 TC	6 25.4
	40.9	72 500	3.35	MR C2I 250 - N320TC 326 TC	4 42.8
	49.6	59 750	1.9	MR C2I 200 - N320TC 326 TC	4 35.3
	48.3	61 350	2.5	MR C2I 225 - N320TC 326 TC	4 36.2
	47.0	63 050	3.55	MR C2I 250 - N320TC 326 TC	4 37.2
	56.9	53 200	1.32	MR CI 200 - N320TC 326 TC	4 30.8
	58.4	51 800	1.9	MR CI 200 - N360TC 365 TC	6 19.7
	54.2	54 650	2	MR C2I 200 - N320TC 326 TC	4 32.3
	56.7	53 350	2.24	MR CI 225 - N360TC 365 TC	6 20.3
	55.8	53 150	2.5	MR C2I 225 - N320TC 326 TC	4 31.4
	55.2	54 850	2.65	MR CI 250 - N320TC 326 TC	4 31.7
	51.7	57 300	4	MR C2I 250 - N320TC 326 TC	4 33.9
	63.9	47 350	2	MR CI 200 - N360TC 365 TC	6 18.0
	62.6	47 350	2.36	MR C2I 200 - N320TC 326 TC	4 28.0
	61.6	49 100	2.24	MR CI 225 - N360TC 365 TC	6 18.7
	60.9	48 600	3.15	MR C2I 225 - N320TC 326 TC	4 28.7
	71.1	42 550	1	MR CI 160 - N320TC 326 TC	4 24.6
	71.1	42 550	2	MR CI 200 - N320TC 326 TC	4 24.6
	68.4	43 300	2.65	MR C2I 200 - N320TC 326 TC	4 25.6
	71.9	42 100	3	MR CI 225 - N360TC 365 TC	6 16.0
	70.3	42 100	3.35	MR C2I 225 - N320TC 326 TC	4 24.9
	81.0	37 350	2.65	MR CI 200 - N360TC 365 TC	6 14.2
	78.1	38 700	3.35	MR CI 225 - N360TC 365 TC	6 14.7
	78.4	38 600	3.75	MR CI 250 - N320TC 326 TC	4 22.3
	88.9	34 050	1.32	MR CI 160 - N320TC 326 TC	4 19.7
	86.3	35 050	1.7	MR CI 180 - N320TC 326 TC	4 20.3
	88.9	34 050	2.8	MR CI 200 - N320TC 326 TC	4 19.7
	86.3	35 050	3.35	MR CI 225 - N320TC 326 TC	4 20.3
	97.2	31 100	1.5	MR CI 160 - N320TC 326 TC	4 18.0
	93.8	32 250	1.9	MR CI 180 - N320TC 326 TC	4 18.7
	97.2	31 100	3	MR CI 200 - N320TC 326 TC	4 18.0
	93.8	32 250	3.35	MR CI 225 - N320TC 326 TC	4 18.7
	106	28 600	1.5	MR CI 160 - N320TC 326 TC	4 16.5
	109	27 650	2.24	MR CI 180 - N320TC 326 TC	4 16.0
	106	28 600	3	MR CI 200 - N320TC 326 TC	4 16.5
	109	27 650	4.5	MR CI 225 - N320TC 326 TC	4 16.0
	123	24 550	2	MR CI 160 - N320TC 326 TC	4 14.2
	119	25 450	2.5	MR CI 180 - N320TC 326 TC	4 14.7
	123	24 550	4	MR CI 200 - N320TC 326 TC	4 14.2
	119	25 450	5	MR CI 225 - N320TC 326 TC	4 14.7
	134	22 550	2.12	MR CI 160 - N320TC 326 TC	4 13.0
	134	22 650	2.5	MR CI 180 - N320TC 326 TC	4 13.1
	134	22 550	4.25	MR CI 200 - N320TC 326 TC	4 13.0
	136	22 200	5	MR CI 225 - N320TC 326 TC	4 12.8
	153	19 700	2.12	MR CI 160 - N320TC 326 TC	4 11.4
	154	19 650	2.5	MR CI 180 - N320TC 326 TC	4 11.4
	155	19 450	4.25	MR CI 200 - N320TC 326 TC	4 11.3
	151	20 000	5	MR CI 225 - N320TC 326 TC	4 11.6
	177	17 100	2.12	MR CI 160 - N320TC 326 TC	4 9.88
	171	17 700	2.5	MR CI 180 - N320TC 326 TC	4 10.3
	170	17 800	4.25	MR CI 200 - N320TC 326 TC	4 10.3
	175	17 300	5	MR CI 225 - N320TC 326 TC	4 10.0
	227	13 350	2.12	MR CI 160 - N320TC 326 TC	4 7.71
	217	13 950	4.25	MR CI 200 - N320TC 326 TC	4 8.06
	284	10 650	2.12	MR CI 160 - N320TC 326 TC	4 6.16
	271	11 150	4.25	MR CI 200 - N320TC 326 TC	4 6.46
60	7.36	482 900	0.8	MR C2I 320 - N400TC 404 TC	6 156
	7.36	482 900	1	MR C2I 321 - N400TC 404 TC	6 156
	7.15	497 400	1.32	MR C2I 360 - N400TC 404 TC	6 161

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
60	9.17	387 700	0.8	MR C2I 280 - N400TC 404 TC	6 125
	8.91	398 900	1.18	MR C2I 320 - N400TC 404 TC	6 129
	8.91	398 900	1.5	MR C2I 321 - N400TC 404 TC	6 129
	9.06	392 300	1.7	MR C2I 360 - N400TC 404 TC	6 127
	11.7	304 300	0.85	MR C2I 250 - N400TC 404 TC	6 98.5
	11.4	312 500	0.95	MR C2I 280 - N360TC 364 TC	4 154
	11.2	317 300	1.18	MR C2I 320 - N360TC 364 TC	4 156
	11.1	319 100	1.4	MR C2I 320 - N400TC 404 TC	6 103
	11.2	317 300	1.4	MR C2I 321 - N360TC 364 TC	4 156
	11.1	319 100	1.8	MR C2I 321 - N400TC 404 TC	6 103
	10.9	326 900	2	MR C2I 360 - N360TC 364 TC	4 161
	11.3	313 900	2.24	MR C2I 360 - N400TC 404 TC	6 102
	12.9	275 100	0.95	MR C2I 250 - N400TC 404 TC	6 89.0
	12.8	277 200	1.25	MR C2I 280 - N400TC 404 TC	6 89.7
	12.9	274 600	1.5	MR C2I 320 - N400TC 404 TC	6 88.8
	12.9	274 600	1.9	MR C2I 321 - N400TC 404 TC	6 88.8
	12.6	282 500	2.36	MR C2I 360 - N400TC 404 TC	6 91.4
	14.2	250 000	1	MR C2I 250 - N360TC 364 TC	4 123
	14.0	254 800	1.25	MR C2I 280 - N360TC 364 TC	4 125
	13.6	262 100	1.7	MR C2I 320 - N360TC 364 TC	4 129
	13.6	262 100	2.12	MR C2I 321 - N360TC 364 TC	4 129
	13.8	257 800	2.5	MR C2I 360 - N360TC 364 TC	4 127
	16.2	220 100	1.18	MR C2I 250 - N400TC 404 TC	6 71.2
	16.0	221 700	1.6	MR C2I 280 - N400TC 404 TC	6 71.7
	16.2	219 700	1.9	MR C2I 320 - N400TC 404 TC	6 71.1
	16.2	219 700	2.36	MR C2I 321 - N400TC 404 TC	6 71.1
	15.7	226 000	2.8	MR C2I 360 - N400TC 404 TC	6 73.1
	17.8	200 000	1.25	MR C2I 250 - N360TC 364 TC	4 98.5
	17.4	203 800	1.6	MR C2I 280 - N360TC 364 TC	4 100
	17.0	209 700	2	MR C2I 320 - N360TC 364 TC	4 103
	17.0	209 700	2.5	MR C2I 321 - N360TC 364 TC	4 103
	17.2	206 200	3.15	MR C2I 360 - N360TC 364 TC	4 102
	19.7	180 800	1.4	MR C2I 250 - N360TC 364 TC	4 89.0
	19.5	182 100	1.9	MR C2I 280 - N360TC 364 TC	4 89.7
	19.7	180 500	2.24	MR C2I 320 - N360TC 364 TC	4 88.8
	19.7	180 500	2.8	MR C2I 321 - N360TC 364 TC	4 88.8
	19.1	185 600	3.35	MR C2I 360 - N360TC 364 TC	4 91.4
	22.2	160 000	1.5	MR C2I 250 - N360TC 364 TC	4 78.8
	21.8	163 100	1.9	MR C2I 280 - N360TC 364 TC	4 80.3
	21.2	167 700	2.5	MR C2I 320 - N360TC 364 TC	4 82.6
	21.2	167 700	3.15	MR C2I 321 - N360TC 364 TC	4 82.6
	24.6	144 600	1.7	MR C2I 250 - N360TC 364 TC	4 71.2
	24.4	145 700	2.24	MR C2I 280 - N360TC 364 TC	4 71.7
	24.6	144 400	2.8	MR C2I 320 - N360TC 364 TC	4 71.1
	24.6	144 400	3.35	MR C2I 321 - N360TC 364 TC	4 71.1
	28.2	126 200	1.9	MR C2I 250 - N360TC 364 TC	4 62.1
	27.6	128 600	2.5	MR C2I 280 - N360TC 364 TC	4 63.3
	26.9	132 300	3.15	MR C2I 320 - N360TC 364 TC	4 65.1
	31.2	114 000	2.12	MR C2I 250 - N360TC 364 TC	4 56.1
	30.9	114 900	2.8	MR C2I 280 - N360TC 364 TC	4 56.6
	31.2	113 800	3.55	MR C2I 320 - N360TC 364 TC	4 56.0
	36.2	100 200	1.5	MR CI 250 - N400TC 404 TC	6 31.7
	33.6	105 900	2.24	MR C2I 250 - N360TC 364 TC	4 52.1
	32.9	108 000	2.8	MR C2I 280 - N360TC 364 TC	4 53.1
	34.1	104 200	4	MR C2I 320 - N360TC 364 TC	4 51.3
	41.2	88 150	1.5	MR CI 250 - N400TC 404 TC	6 27.9
	37.1	95 750	2.5	MR C2I 250 - N360TC 364 TC	4 47.1
	36.9	96 450	3.15	MR C2I 280 - N360TC 364 TC	4 47.5
	46.7	77 700	1.12	MR CI 200 - N400TC 404 TC	6 24.6
	45.3	80 150	2.24	MR CI 250 - N400TC 404 TC	6 25.4
	40.9	87 000	2.8	MR C2I 250 - N360TC 364 TC	4 42.8
	42.1	84 400	3.75	MR C2I 280 - N360TC 364 TC	4 41.6
	51.5	70 500	2.24	MR CI 250 - N400TC 404 TC	6 22.3
	47.0	75 650	3	MR C2I 250 - N360TC 364 TC	4 37.2
	46.6	76 250	4	MR C2I 280 - N360TC 364 TC	4 37.5

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
2)					
60	56.9	63 850	1.12	MR CI 200 - N360TC 364 TC	4 30.8
	58.4	62 150	1.6	MR CI 200 - N400TC 404 TC	6 19.7
	56.7	64 050	1.9	MR CI 225 - N400TC 404 TC	6 20.3
	55.2	65 800	2.24	MR CI 250 - N360TC 364 TC	4 31.7
	51.7	68 750	3.35	MR C2I 250 - N360TC 364 TC	4 33.9
	63.9	56 800	1.7	MR CI 200 - N400TC 404 TC	6 18.0
	61.6	58 950	1.9	MR CI 225 - N400TC 404 TC	6 18.7
	62.7	57 900	2.24	MR CI 250 - N360TC 364 TC	4 27.9
	59.3	59 950	3.75	MR C2I 250 - N360TC 364 TC	4 29.5
	71.1	51 050	1.7	MR CI 200 - N360TC 364 TC	4 24.6
	71.9	50 500	2.5	MR CI 225 - N400TC 404 TC	6 16.0
	68.9	52 650	3.15	MR CI 250 - N360TC 364 TC	4 25.4
	81.0	44 800	2.24	MR CI 200 - N400TC 404 TC	6 14.2
	78.1	46 450	2.8	MR CI 225 - N400TC 404 TC	6 14.7
	78.4	46 350	3.15	MR CI 250 - N360TC 364 TC	4 22.3
	88.9	40 850	2.24	MR CI 200 - N360TC 364 TC	4 19.7
	86.3	42 100	2.8	MR CI 225 - N360TC 364 TC	4 20.3
	86.2	42 150	4.25	MR CI 250 - N360TC 364 TC	4 20.3
	97.2	37 350	2.5	MR CI 200 - N360TC 364 TC	4 18.0
	93.8	38 700	2.8	MR CI 225 - N360TC 364 TC	4 18.7
	97.9	37 050	5	MR CI 250 - N360TC 364 TC	4 17.9
	106	34 300	2.5	MR CI 200 - N360TC 364 TC	4 16.5
	109	33 200	3.75	MR CI 225 - N360TC 364 TC	4 16.0
	123	29 450	3.35	MR CI 200 - N360TC 364 TC	4 14.2
	134	27 050	3.55	MR CI 200 - N360TC 364 TC	4 13.0
	155	23 350	3.55	MR CI 200 - N360TC 364 TC	4 11.3
	170	21 350	3.55	MR CI 200 - N360TC 364 TC	4 10.3
	217	16 700	3.55	MR CI 200 - N360TC 364 TC	4 8.06
	271	13 400	3.55	MR CI 200 - N360TC 364 TC	4 6.46
75	7.36	603 600	0.8	MR C2I 321 - N400TC 405 TC	6 156
	7.15	621 800	1.06	MR C2I 360 - N400TC 405 TC	6 161
	8.91	498 600	0.95	MR C2I 320 - N400TC 405 TC	6 129
	8.91	498 600	1.18	MR C2I 321 - N400TC 405 TC	6 129
	9.06	490 400	1.32	MR C2I 360 - N400TC 405 TC	6 127
	11.5	387 700	0.85	MR C2I 280 - N400TC 405 TC	6 100
	11.2	396 600	0.9	MR C2I 320 - N360TC 365 TC	4 156
	11.1	398 900	1.12	MR C2I 320 - N400TC 405 TC	6 103
	11.2	396 600	1.18	MR C2I 321 - N360TC 365 TC	4 156
	11.1	398 900	1.4	MR C2I 321 - N400TC 405 TC	6 103
	10.9	408 600	1.6	MR C2I 360 - N360TC 365 TC	4 161
	12.8	346 500	1	MR C2I 280 - N400TC 405 TC	6 89.7
	12.9	343 300	1.25	MR C2I 320 - N400TC 405 TC	6 88.8
	12.9	343 300	1.5	MR C2I 321 - N400TC 405 TC	6 88.8
	12.6	353 100	1.9	MR C2I 360 - N400TC 405 TC	6 91.4
	14.2	312 500	0.8	MR C2I 250 - N360TC 365 TC	4 123
	14.0	318 500	1	MR C2I 280 - N360TC 365 TC	4 125
	13.6	327 600	1.32	MR C2I 320 - N360TC 365 TC	4 129
	13.6	327 600	1.7	MR C2I 321 - N360TC 365 TC	4 129
	13.8	322 300	2	MR C2I 360 - N360TC 365 TC	4 127
	16.2	275 100	0.95	MR C2I 250 - N400TC 405 TC	6 71.2
	16.0	277 200	1.32	MR C2I 280 - N400TC 405 TC	6 71.7
	16.2	274 600	1.5	MR C2I 320 - N400TC 405 TC	6 71.1
	16.2	274 600	1.9	MR C2I 321 - N400TC 405 TC	6 71.1
	15.7	282 500	2.24	MR C2I 360 - N400TC 405 TC	6 73.1
	17.8	250 000	1	MR C2I 250 - N360TC 365 TC	4 98.5
	17.4	254 800	1.25	MR C2I 280 - N360TC 365 TC	4 100
	17.0	262 100	1.6	MR C2I 320 - N360TC 365 TC	4 103
	17.0	262 100	2	MR C2I 321 - N360TC 365 TC	4 103
	17.2	257 800	2.5	MR C2I 360 - N360TC 365 TC	4 102
	19.7	226 000	1.12	MR C2I 250 - N360TC 365 TC	4 89.0
	19.5	227 700	1.5	MR C2I 280 - N360TC 365 TC	4 89.7
	19.7	225 600	1.8	MR C2I 320 - N360TC 365 TC	4 88.8
	19.7	225 600	2.24	MR C2I 321 - N360TC 365 TC	4 88.8
	19.1	232 000	2.65	MR C2I 360 - N360TC 365 TC	4 91.4

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
2)					
75	22.2	200 000	1.18	MR C2I 250 - N360TC 365 TC	4 78.8
	21.8	203 800	1.5	MR C2I 280 - N360TC 365 TC	4 80.3
	21.2	209 700	2	MR C2I 320 - N360TC 365 TC	4 82.6
	21.2	209 700	2.5	MR C2I 321 - N360TC 365 TC	4 82.6
	21.5	206 200	3	MR C2I 360 - N360TC 365 TC	4 81.2
	24.6	180 800	1.4	MR C2I 250 - N360TC 365 TC	4 71.2
	24.4	182 100	1.8	MR C2I 280 - N360TC 365 TC	4 71.7
	24.6	180 500	2.24	MR C2I 320 - N360TC 365 TC	4 71.1
	24.6	180 500	2.8	MR C2I 321 - N360TC 365 TC	4 71.1
	23.9	185 600	3.35	MR C2I 360 - N360TC 365 TC	4 73.1
	28.2	157 700	1.5	MR C2I 250 - N360TC 365 TC	4 62.1
	28.6	160 700	1.9	MR C2I 280 - N360TC 365 TC	4 63.3
	26.9	165 300	2.5	MR C2I 320 - N360TC 365 TC	4 65.1
	26.9	165 300	3.15	MR C2I 321 - N360TC 365 TC	4 65.1
	31.2	142 500	1.7	MR C2I 250 - N360TC 365 TC	4 56.1
	30.9	143 600	2.24	MR C2I 280 - N360TC 365 TC	4 56.6
	31.2	142 300	2.8	MR C2I 320 - N360TC 365 TC	4 56.0
	31.2	142 300	3.55	MR C2I 321 - N360TC 365 TC	4 56.0
	33.6	132 400	1.8	MR C2I 250 - N360TC 365 TC	4 52.1
	32.9	134 900	2.24	MR C2I 280 - N360TC 365 TC	4 53.1
	34.1	130 300	3.15	MR C2I 320 - N360TC 365 TC	4 51.3
	41.2	110 200	1.18	MR CI 250 - N400TC 405 TC	6 27.9
	37.1	119 700	2	MR C2I 250 - N360TC 365 TC	4 47.1
	36.9	120 600	2.65	MR C2I 280 - N360TC 365 TC	4 47.5
	39.6	112 100	3.55	MR C2I 320 - N360TC 365 TC	4 44.2
	46.7	97 150	0.9	MR CI 200 - N400TC 405 TC	6 24.6
	45.3	100 200	1.8	MR CI 250 - N400TC 405 TC	6 25.4
	40.9	108 800	2.24	MR C2I 250 - N360TC 365 TC	4 42.8
	42.1	105 500	3	MR C2I 280 - N360TC 365 TC	4 41.6
	44.3	100 400	4	MR C2I 320 - N360TC 365 TC	4 39.5
	51.5	88 150	1.8	MR CI 250 - N400TC 405 TC	6 22.3
	47.0	94 550	2.36	MR C2I 250 - N360TC 365 TC	4 37.2
	46.6	95 300	3.15	MR C2I 280 - N360TC 365 TC	4 37.5
	56.9	79 800	0.9	MR CI 200 - N360TC 365 TC	4 30.8
	58.4	77 700	1.32	MR CI 200 - N400TC 405 TC	6 19.7
	56.7	80 050	1.5	MR CI 225 - N400TC 405 TC	6 20.3
	55.2	82 300	1.8	MR CI 250 - N360TC 365 TC	4 31.7
	51.7	85 950	2.65	MR C2I 250 - N360TC 365 TC	4 33.9
	53.3	83 400	3.35	MR C2I 280 - N360TC 365 TC	4 32.8
	63.9	71 050	1.4	MR CI 200 - N400TC 405 TC	6 18.0
	61.6	73 650	1.5	MR CI 225 - N400TC 405 TC	6 18.7
	62.7	72 400	1.8	MR CI 250 - N360TC 365 TC	4 27.9
	59.3	74 950	3	MR C2I 250 - N360TC 365 TC	4 29.5
	58.8	75 550	4	MR C2I 280 - N360TC 365 TC	4 29.8
	71.1	63 850	1.32	MR CI 200 - N360TC 365 TC	4 24.6
	71.9	63 100	2	MR CI 225 - N400TC 405 TC	6 16.0
	68.9	65 800	2.5	MR CI 250 - N360TC 365 TC	4 25.4
	65.2	68 150	3.35	MR C2I 250 - N360TC 365 TC	4 26.8
	81.0	56 000	1.8	MR CI 200 - N400TC 405 TC	6 14.2
	78.1	58 100	2.24	MR CI 225 - N400TC 405 TC	6 14.7
	78.4	57 900	2.5	MR CI 250 - N360TC 365 TC	4 22.3
	81.6	55 600	3.55	MR CI 250 - N400TC 405 TC	6 14.1
	88.9	51 050	1.8	MR CI 200 - N360TC 365 TC	4 19.7
	86.3	52 600	2.24	MR CI 225 - N360TC 365 TC	4 20.3
	86.2	52 650	3.55	MR CI 250 - N360TC 365 TC	4 20.3
	97.2	46 650	2	MR CI 200 - N360TC 365 TC	4 18.0
	93.8	48 400	2.24	MR CI 225 - N360TC 365 TC	4 18.7
	97.9	46 350	4	MR CI 250 - N360TC 365 TC	4 17.9
	106	42 850	2	MR CI 200 - N360TC 365 TC	4 16.5
	109	41 450	3	MR CI 225 - N360TC 365 TC	4 16.0
	109	41 500	4	MR CI 250 - N360TC 365 TC	4 16.0
	123	36 800	2.65	MR CI 200 - N360TC 365 TC	4 14.2
	119	38 150	3.35	MR CI 225 - N360TC 365 TC	4 14.7

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.


2) For complete designation when ordering see ch. 3.1.


Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s			Gear ratio i
75	134	33 800	3	MR CI 200 - N360TC	365 TC	4 13.0
	136	33 300	3.35	MR CI 225 - N360TC	365 TC	4 12.8
	155	29 200	3	MR CI 200 - N360TC	365 TC	4 11.3
	151	30 000	3.35	MR CI 225 - N360TC	365 TC	4 11.6
	170	26 700	3	MR CI 200 - N360TC	365 TC	4 10.3
	175	26 000	3.35	MR CI 225 - N360TC	365 TC	4 10.0
	217	20 900	3	MR CI 200 - N360TC	365 TC	4 8.06
	271	16 750	3	MR CI 200 - N360TC	365 TC	4 6.46
100	7.15	829 000	0.8	MR C2I 360 - N440TC	444 TC	6 161
	8.91	664 800	0.9	MR C2I 321 - N440TC	444 TC	6 129
	9.06	653 900	1	MR C2I 360 - N440TC	444 TC	6 127
	11.2	528 800	0.85	MR C2I 321 - N400TC	405 TC	4 156
	11.1	531 800	1.06	MR C2I 321 - N440TC	444 TC	6 103
	10.9	544 800	1.18	MR C2I 360 - N400TC	405 TC	4 161
	12.9	457 700	0.95	MR C2I 320 - N440TC	444 TC	6 88.8
	12.9	457 700	1.18	MR C2I 321 - N440TC	444 TC	6 88.8
	12.6	470 800	1.4	MR C2I 360 - N440TC	444 TC	6 91.4
	13.6	436 800	1	MR C2I 320 - N400TC	405 TC	4 129
	13.6	436 800	1.25	MR C2I 321 - N400TC	405 TC	4 129
	13.8	429 700	1.5	MR C2I 360 - N400TC	405 TC	4 127
	16.2	366 200	1.12	MR C2I 320 - N440TC	444 TC	6 71.1
	16.2	366 200	1.4	MR C2I 321 - N440TC	444 TC	6 71.1
	15.7	376 600	1.7	MR C2I 360 - N440TC	444 TC	6 73.1
	17.4	339 700	0.95	MR C2I 280 - N400TC	405 TC	4 100
	17.0	349 500	1.18	MR C2I 320 - N400TC	405 TC	4 103
	17.0	349 500	1.5	MR C2I 321 - N400TC	405 TC	4 103
	17.2	343 700	1.9	MR C2I 360 - N400TC	405 TC	4 102
	19.7	301 300	0.85	MR C2I 250 - N400TC	405 TC	4 89.0
	19.5	303 600	1.12	MR C2I 280 - N400TC	405 TC	4 89.7
	19.7	300 800	1.32	MR C2I 320 - N400TC	405 TC	4 88.8
	19.7	300 800	1.7	MR C2I 321 - N400TC	405 TC	4 88.8
	19.1	309 400	2	MR C2I 360 - N400TC	405 TC	4 91.4
	22.2	266 700	0.9	MR C2I 250 - N400TC	405 TC	4 78.8
	21.8	271 800	1.18	MR C2I 280 - N400TC	405 TC	4 80.3
	21.2	279 600	1.5	MR C2I 320 - N400TC	405 TC	4 82.6
	21.2	279 600	1.9	MR C2I 321 - N400TC	405 TC	4 82.6
	21.5	275 000	2.24	MR C2I 360 - N400TC	405 TC	4 81.2
	24.6	241 000	1	MR C2I 250 - N400TC	405 TC	4 71.2
	24.4	242 900	1.4	MR C2I 280 - N400TC	405 TC	4 71.7
	24.6	240 600	1.7	MR C2I 320 - N400TC	405 TC	4 71.1
	24.6	240 600	2	MR C2I 321 - N400TC	405 TC	4 71.1
	23.9	247 500	2.5	MR C2I 360 - N400TC	405 TC	4 73.1
	28.2	210 300	1.12	MR C2I 250 - N400TC	405 TC	4 62.1
	27.6	214 300	1.5	MR C2I 280 - N400TC	405 TC	4 63.3
	26.9	220 400	1.9	MR C2I 320 - N400TC	405 TC	4 65.1
	26.9	220 400	2.36	MR C2I 321 - N400TC	405 TC	4 65.1
	27.3	216 800	2.8	MR C2I 360 - N400TC	405 TC	4 64.0
	31.2	190 000	1.32	MR C2I 250 - N400TC	405 TC	4 56.1
	30.9	191 500	1.7	MR C2I 280 - N400TC	405 TC	4 56.6
	31.2	189 700	2.12	MR C2I 320 - N400TC	405 TC	4 56.0
	31.2	189 700	2.65	MR C2I 321 - N400TC	405 TC	4 56.0
	30.4	195 100	3.15	MR C2I 360 - N400TC	405 TC	4 57.6
	33.6	176 500	1.4	MR C2I 250 - N400TC	405 TC	4 52.1
	32.9	179 900	1.7	MR C2I 280 - N400TC	405 TC	4 53.1
	34.1	173 700	2.36	MR C2I 320 - N400TC	405 TC	4 51.3
	34.1	173 700	2.8	MR C2I 321 - N400TC	405 TC	4 51.3
	34.7	170 800	3.55	MR C2I 360 - N400TC	405 TC	4 50.5
	41.2	146 900	0.9	MR CI 250 - N440TC	444 TC	6 27.9
	37.1	159 600	1.5	MR C2I 250 - N400TC	405 TC	4 47.1
	36.9	160 800	1.9	MR C2I 280 - N400TC	405 TC	4 47.5
	39.6	149 500	2.65	MR C2I 320 - N400TC	405 TC	4 44.2
	39.6	149 500	3.35	MR C2I 321 - N400TC	405 TC	4 44.2

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s			Gear ratio i
100	45.3	133 600	1.32	MR CI 250 - N440TC	444 TC	6 25.4
	40.9	145 000	1.7	MR C2I 250 - N400TC	405 TC	4 42.8
	42.1	140 700	2.24	MR C2I 280 - N400TC	405 TC	4 41.6
	44.3	133 800	3	MR C2I 320 - N400TC	405 TC	4 39.5
	44.3	133 800	3.75	MR C2I 321 - N400TC	405 TC	4 39.5
	51.5	117 500	1.32	MR CI 250 - N440TC	444 TC	6 22.3
	47.0	126 100	1.8	MR C2I 250 - N400TC	405 TC	4 37.2
	46.6	127 100	2.36	MR C2I 280 - N400TC	405 TC	4 37.5
	48.3	122 800	3.15	MR C2I 320 - N400TC	405 TC	4 36.3
	55.2	109 700	1.32	MR CI 250 - N400TC	405 TC	4 31.7
	51.7	114 600	2	MR C2I 250 - N400TC	405 TC	4 33.9
	57.5	105 200	2.24	MR CI 280 - N440TC	444 TC	6 20.0
	53.3	111 200	2.5	MR C2I 280 - N400TC	405 TC	4 32.8
	53.9	109 900	3.55	MR C2I 320 - N400TC	405 TC	4 32.5
	62.7	96 500	1.32	MR CI 250 - N400TC	405 TC	4 27.9
	59.3	99 950	2.24	MR C2I 250 - N400TC	405 TC	4 29.5
	63.9	94 700	2.24	MR CI 280 - N440TC	444 TC	6 18.0
	58.8	100 700	3.15	MR C2I 280 - N400TC	405 TC	4 29.8
	60.9	97 350	4	MR C2I 320 - N400TC	405 TC	4 28.8
	60.9	97 350	5	MR C2I 321 - N400TC	405 TC	4 28.8
	59.2	100 100	6.3	MR C2I 360 - N400TC	405 TC	4 29.6
	71.1	85 100	1	MR CI 200 - N400TC	405 TC	4 24.6
	68.9	87 750	1.9	MR CI 250 - N400TC	405 TC	4 25.4
	65.2	90 850	2.5	MR C2I 250 - N400TC	405 TC	4 26.8
	67.2	88 150	3.35	MR C2I 280 - N400TC	405 TC	4 26.0
	78.4	77 200	1.9	MR CI 250 - N400TC	405 TC	4 22.3
	81.6	74 100	2.8	MR CI 250 - N440TC	444 TC	6 14.1
	81.0	74 650	3.35	MR CI 280 - N440TC	444 TC	6 14.2
	88.9	68 100	1.4	MR CI 200 - N400TC	405 TC	4 19.7
	86.3	70 150	1.7	MR CI 225 - N400TC	405 TC	4 20.3
	86.2	70 200	2.65	MR CI 250 - N400TC	405 TC	4 20.3
	87.5	69 150	3.35	MR CI 280 - N400TC	405 TC	4 20.0
	97.2	62 250	1.5	MR CI 200 - N400TC	405 TC	4 18.0
	93.8	64 550	1.7	MR CI 225 - N400TC	405 TC	4 18.7
	97.9	61 750	3	MR CI 250 - N400TC	405 TC	4 17.9
	97.2	62 250	3.35	MR CI 280 - N400TC	405 TC	4 18.0
	106	57 150	1.5	MR CI 200 - N400TC	405 TC	4 16.5
	109	55 300	2.24	MR CI 225 - N400TC	405 TC	4 16.0
	109	55 300	3	MR CI 250 - N400TC	405 TC	4 16.0
	111	54 500	4.5	MR CI 280 - N400TC	405 TC	4 15.8
	123	49 050	2	MR CI 200 - N400TC	405 TC	4 14.2
	119	50 900	2.5	MR CI 225 - N400TC	405 TC	4 14.7
	124	48 700	4	MR CI 250 - N400TC	405 TC	4 14.1
	134	45 050	2.12	MR CI 200 - N400TC	405 TC	4 13.0
	136	44 400	2.5	MR CI 225 - N400TC	405 TC	4 12.8
	139	43 600	4.25	MR CI 250 - N400TC	405 TC	4 12.6
	155	38 950	2.12	MR CI 200 - N400TC	405 TC	4 11.3
	151	40 000	2.5	MR CI 225 - N400TC	405 TC	4 11.6
	153	39 400	4.25	MR CI 250 - N400TC	405 TC	4 11.4
	170	35 600	2.12	MR CI 200 - N400TC	405 TC	4 10.3
	175	34 650	2.5	MR CI 225 - N400TC	405 TC	4 10.0
	169	35 850	4.25	MR CI 250 - N400TC	405 TC	4 10.4
	217	27 850	2.12	MR CI 200 - N400TC	405 TC	4 8.06
	271	22 350	2.12	MR CI 200 - N400TC	405 TC	4 6.46
125	9.06	817 300	0.8	MR C2I 360 - N440TC	445 TC	6 127
	11.1	664 800	0.85	MR C2I 321 - N440TC	445 TC	6 103
	10.9	681 000	0.95	MR C2I 360 - N440TC	444 TC	4 161
	12.9	572 100	0.95	MR C2I 321 - N440TC	445 TC	6 88.8
	12.6	588 500	1.12	MR C2I 360 - N440TC	445 TC	6 91.4
	13.6	546 100	0.8	MR C2I 320 - N440TC	444 TC	4 129
	13.6	546 100	1	MR C2I 321 - N440TC	444 TC	4 129
	13.8	537 100	1.18	MR C2I 360 - N440TC	444 TC	4 127

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
125	16.2	457 700	0.9	MR C2I 320 - N440TC 445 TC 6	71.1
	16.2	457 700	1.12	MR C2I 321 - N440TC 445 TC 6	71.1
	15.7	470 800	1.32	MR C2I 360 - N440TC 445 TC 6	73.1
	17.0	436 800	0.95	MR C2I 320 - N440TC 444 TC 4	103
	17.0	436 800	1.18	MR C2I 321 - N440TC 444 TC 4	103
	17.2	429 700	1.5	MR C2I 360 - N440TC 444 TC 4	102
	19.7	376 000	1.06	MR C2I 320 - N440TC 444 TC 4	88.8
	19.7	376 000	1.32	MR C2I 321 - N440TC 444 TC 4	88.8
	19.1	386 700	1.6	MR C2I 360 - N440TC 444 TC 4	91.4
	21.2	349 500	1.18	MR C2I 320 - N440TC 444 TC 4	82.6
	21.2	349 500	1.5	MR C2I 321 - N440TC 444 TC 4	82.6
	21.5	343 700	1.8	MR C2I 360 - N440TC 444 TC 4	81.2
	24.6	300 800	1.32	MR C2I 320 - N440TC 444 TC 4	71.1
	24.6	300 800	1.6	MR C2I 321 - N440TC 444 TC 4	71.1
	23.9	309 400	2	MR C2I 360 - N440TC 444 TC 4	73.1
	26.9	275 500	1.5	MR C2I 320 - N440TC 444 TC 4	65.1
	26.9	275 500	1.9	MR C2I 321 - N440TC 444 TC 4	65.1
	27.3	271 000	2.24	MR C2I 360 - N440TC 444 TC 4	64.0
	31.2	237 200	1.7	MR C2I 320 - N440TC 444 TC 4	56.0
	31.2	237 200	2.12	MR C2I 321 - N440TC 444 TC 4	56.0
	30.4	243 900	2.65	MR C2I 360 - N440TC 444 TC 4	57.6
	34.1	217 100	1.9	MR C2I 320 - N440TC 444 TC 4	51.3
	34.1	217 100	2.24	MR C2I 321 - N440TC 444 TC 4	51.3
	34.7	213 500	2.8	MR C2I 360 - N440TC 444 TC 4	50.5
	39.6	186 800	2.12	MR C2I 320 - N440TC 444 TC 4	44.2
	39.6	186 800	2.65	MR C2I 321 - N440TC 444 TC 4	44.2
	38.5	192 200	3.35	MR C2I 360 - N440TC 444 TC 4	45.4
	45.3	166 900	1.06	MR CI 250 - N440TC 445 TC 6	25.4
	44.3	167 300	2.36	MR C2I 320 - N440TC 444 TC 4	39.5
	44.3	167 300	3	MR C2I 321 - N440TC 444 TC 4	39.5
	42.7	173 500	3.55	MR C2I 360 - N440TC 444 TC 4	41.0
	51.5	146 900	1.06	MR CI 250 - N440TC 445 TC 6	22.3
	48.3	153 500	2.65	MR C2I 320 - N440TC 444 TC 4	36.3
	48.3	153 500	3.15	MR C2I 321 - N440TC 444 TC 4	36.3
	55.2	137 100	1.06	MR CI 250 - N440TC 444 TC 4	31.7
	56.6	133 600	1.4	MR CI 250 - N440TC 445 TC 6	20.3
	57.5	131 500	1.8	MR CI 280 - N440TC 445 TC 6	20.0
	53.9	137 400	2.8	MR C2I 320 - N440TC 444 TC 4	32.5
	53.9	137 400	3.55	MR C2I 321 - N440TC 444 TC 4	32.5
	62.7	120 600	1.06	MR CI 250 - N440TC 444 TC 4	27.9
	64.4	117 500	1.6	MR CI 250 - N440TC 445 TC 6	17.9
	63.9	118 400	1.8	MR CI 280 - N440TC 445 TC 6	18.0
	60.9	121 700	3.15	MR C2I 320 - N440TC 444 TC 4	28.8
	68.9	109 700	1.5	MR CI 250 - N440TC 444 TC 4	25.4
	72.9	103 700	2.5	MR CI 280 - N440TC 445 TC 6	15.8
	68.0	108 900	3.55	MR C2I 320 - N440TC 444 TC 4	25.7
	78.4	96 500	1.5	MR CI 250 - N440TC 444 TC 4	22.3
	81.6	92 650	2.12	MR CI 250 - N440TC 445 TC 6	14.1
	81.0	93 350	2.65	MR CI 280 - N440TC 445 TC 6	14.2
	86.2	87 750	2.12	MR CI 250 - N440TC 444 TC 4	20.3
	87.5	86 450	2.65	MR CI 280 - N440TC 444 TC 4	20.0
	97.9	77 200	2.36	MR CI 250 - N440TC 444 TC 4	17.9
	97.2	77 800	2.65	MR CI 280 - N440TC 444 TC 4	18.0
	109	69 150	2.36	MR CI 250 - N440TC 444 TC 4	16.0
	111	68 150	3.55	MR CI 280 - N440TC 444 TC 4	15.8
	124	60 900	3.15	MR CI 250 - N440TC 444 TC 4	14.1
	139	54 500	3.55	MR CI 250 - N440TC 444 TC 4	12.6
	153	49 300	3.55	MR CI 250 - N440TC 444 TC 4	11.4
	169	44 800	3.55	MR CI 250 - N440TC 444 TC 4	10.4
150	10.9	817 200	0.8	MR C2I 360 - N440TC 445 TC 4	161
	13.6	655 300	0.85	MR C2I 321 - N440TC 445 TC 4	129
	13.8	644 500	1	MR C2I 360 - N440TC 445 TC 4	127

Motor power P_1 hp 1)	Output speed n_2 rpm	Output torque T_2 lb in	Service factor f_s		Gear ratio i
150	17.0	524 200	0.8	MR C2I 320 - N440TC 445 TC 4	103
	17.0	524 200	1	MR C2I 321 - N440TC 445 TC 4	103
	17.2	515 600	1.25	MR C2I 360 - N440TC 445 TC 4	102
	19.7	451 200	0.9	MR C2I 320 - N440TC 445 TC 4	88.8
	19.7	451 200	1.12	MR C2I 321 - N440TC 445 TC 4	88.8
	19.1	464 100	1.32	MR C2I 360 - N440TC 445 TC 4	91.4
	21.2	419 400	1	MR C2I 320 - N440TC 445 TC 4	82.6
	21.2	419 400	1.25	MR C2I 321 - N440TC 445 TC 4	82.6
	21.5	412 500	1.5	MR C2I 360 - N440TC 445 TC 4	81.2
	24.6	360 900	1.12	MR C2I 320 - N440TC 445 TC 4	71.1
	24.6	360 900	1.4	MR C2I 321 - N440TC 445 TC 4	71.1
	23.9	371 200	1.7	MR C2I 360 - N440TC 445 TC 4	73.1
	26.9	330 700	1.25	MR C2I 320 - N440TC 445 TC 4	65.1
	26.9	330 700	1.6	MR C2I 321 - N440TC 445 TC 4	65.1
	27.3	325 200	1.9	MR C2I 360 - N440TC 445 TC 4	64.0
	31.2	284 600	1.4	MR C2I 320 - N440TC 445 TC 4	56.0
	31.2	284 600	1.7	MR C2I 321 - N440TC 445 TC 4	56.0
	30.4	292 700	2.12	MR C2I 360 - N440TC 445 TC 4	57.6
	34.1	260 500	1.6	MR C2I 320 - N440TC 445 TC 4	51.3
	34.1	260 500	1.9	MR C2I 321 - N440TC 445 TC 4	51.3
	34.7	256 200	2.36	MR C2I 360 - N440TC 445 TC 4	50.5
	39.6	224 200	1.8	MR C2I 320 - N440TC 445 TC 4	44.2
	39.6	224 200	2.24	MR C2I 321 - N440TC 445 TC 4	44.2
	38.5	230 600	2.65	MR C2I 360 - N440TC 445 TC 4	45.4
	44.3	200 700	2	MR C2I 320 - N440TC 445 TC 4	39.5
	44.3	200 700	2.5	MR C2I 321 - N440TC 445 TC 4	39.5
	42.7	208 200	3	MR C2I 360 - N440TC 445 TC 4	41.0
	48.3	184 200	2.12	MR C2I 320 - N440TC 445 TC 4	36.3
	48.3	184 200	2.65	MR C2I 321 - N440TC 445 TC 4	36.3
	46.9	189 400	3.15	MR C2I 360 - N440TC 445 TC 4	37.3
	55.2	164 600	0.9	MR CI 250 - N440TC 445 TC 4	31.7
	53.9	164 900	2.36	MR C2I 320 - N440TC 445 TC 4	32.5
	53.9	164 900	3	MR C2I 321 - N440TC 445 TC 4	32.5
	52.0	171 000	3.35	MR C2I 360 - N440TC 445 TC 4	33.7
	62.7	144 800	0.9	MR CI 250 - N440TC 445 TC 4	27.9
	60.9	146 000	2.65	MR C2I 320 - N440TC 445 TC 4	28.8
	60.9	146 000	3.35	MR C2I 321 - N440TC 445 TC 4	28.8
	68.9	131 600	1.25	MR CI 250 - N440TC 445 TC 4	25.4
	68.0	130 700	3	MR C2I 320 - N440TC 445 TC 4	25.7
	68.0	130 700	3.75	MR C2I 321 - N440TC 445 TC 4	25.7
	78.4	115 800	1.25	MR CI 250 - N440TC 445 TC 4	22.3
	86.2	105 300	1.7	MR CI 250 - N440TC 445 TC 4	20.3
	87.5	103 700	2.24	MR CI 280 - N440TC 445 TC 4	20.0
	97.9	92 650	2	MR CI 250 - N440TC 445 TC 4	17.9
	97.2	93 350	2.24	MR CI 280 - N440TC 445 TC 4	18.0
	109	83 000	2	MR CI 250 - N440TC 445 TC 4	16.0
	111	81 800	3	MR CI 280 - N440TC 445 TC 4	15.8
	124	73 050	2.65	MR CI 250 - N440TC 445 TC 4	14.1
	123	73 600	3.35	MR CI 280 - N440TC 445 TC 4	14.2
	139	65 400	3	MR CI 250 - N440TC 445 TC 4	12.6
	136	66 700	3.35	MR CI 280 - N440TC 445 TC 4	12.9
	153	59 150	3	MR CI 250 - N440TC 445 TC 4	11.4
	152	59 600	3.35	MR CI 280 - N440TC 445 TC 4	11.5
	169	53 750	3	MR CI 250 - N440TC 445 TC 4	10.4
	174	52 150	3.35	MR CI 280 - N440TC 445 TC 4	10.1

1) Powers valid for continuous duty S1; **increase possible** for duty cycles S2 ... S10: in which case T_2 increases and f_s decreases.

2) For complete designation when ordering see ch. 3.1.


blank page

Dimensions, designs, mounting pos. (bevel helical gearmotors) 3.9

Gearmotors MR CI

Dimensions

MR CI 125 ... 280

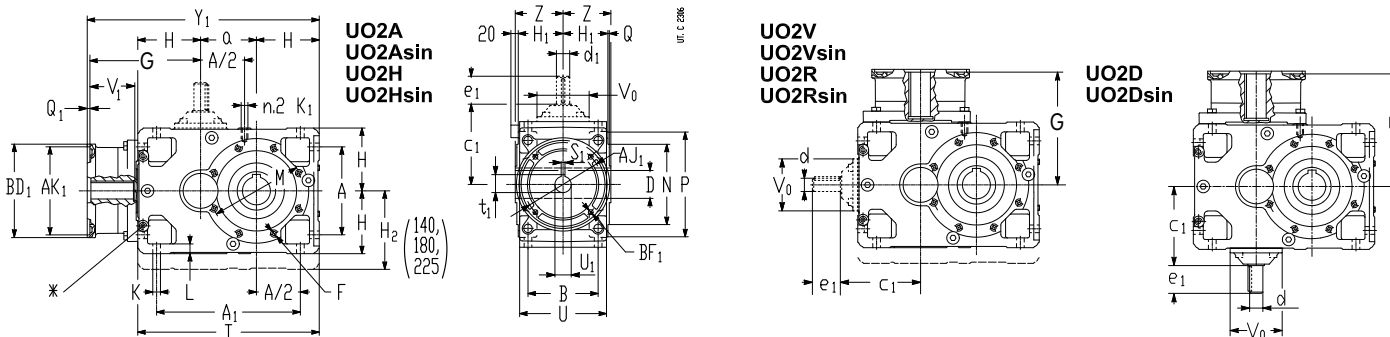

																							NEMA C-Face input side																						
Gear red.	Size NEMA motor frame	a	A	A1	B	D Ø	F	G	H	H1	H2	K Ø	K1	L	M Ø	N Ø h6	P Ø	Q	T	U	V0 Ø h8	Z	U1 Ø	V1	S1	t1	BF1 Ø	AJ1 Ø	AK1 Ø	BD1 Ø	Q1	Y1	Mass												
						in	1)			h11	h12	h11		2)		Ø	Ø							in	in	in	in	in	in	in	in	in													
125	N210TC N250TC N280TC	125	212	337	162	2.375	3)	238	150	103.5	-	18	M12	23	215	180	250	4	425	201	122	110	1.375	3.125	0.312	1.518	0.551	7.25	8.5	9.055	0.217	519	235												
						238																																							
						259																																							
140	N210TC N250TC N280TC	140	212	352	162	2.75	3)	238	150	103.5	180	18	M12	23	265	230	300	4	440	201	122	125	1.375	3.125	0.312	1.518	0.551	7.25	8.5	9.055	0.217	534	265												
						238																																							
						259																																							
160	N250TC N280TC N320TC	160	252	412	201	3.25	M16	269	180	128.5	-	22	M16	28	265	230	300	4	520	249	155	136	1.625	3.750	0.375	1.796	0.551	7.25	8.5	9.640	0.217	615	390												
						285																																							
						301																																							
180	N280TC N320TC	180	252	432	201	3.625	M16	285	180	128.5	225	22	M16	28	300	250	350	5	540	249	155	150	1.875	4.375	0.500	2.096	0.551	9	10.5	11.25	0.217	651	440												
						301																																							
200	N280TC N320TC N360TC N400TC	200	320	520	250	4	3)	330	225	158	-	27	M20	34	350	300	400	5	650	307	190	167	1.875	4.375	0.500	2.096	0.551	9	10.5	11.25	0.217	761	660												
						346																																							
						395																																							
225	N320TC N360TC N400TC	225	320	545	250	4.25	M20	346	225	158	280	27	M20	34	400	350	450	5	675	307	190	180	2.125	5.000	0.500	2.350	0.689	11	12.5	13.07	0.217	802	730												
						395																																							
						395																																							
250	N320TC N360TC N400TC N440TC	250	396	646	310	5	4)	451	280	195	-	33	M24	42	500	450	550	5	810	380	235	206	2.125	5	0.5	2.35	0.689	11	12.5	14	0.217	987	1305												
						451																																							
						451																																							
280	N400TC N440TC	280	396	676	310	5.5	M24	451	280	195	355	33	M24	42	500	450	550	5	840	380	235	222	2.875	7	0.75	3.205	0.689	11	12.5	14	0.217	1017	1470												
						483																																							

Gear red. size	2nd input shaft end				
	c1	d1	e1	d1	e1
125	188	$i_N \leq 14$ 28	60	$i_N \geq 16$ 24	50
140	188	$i_N \leq 16$ 28	60	$i_N \geq 18$ 24	50
160	226	$i_N \leq 14$ 38	80	$i_N \geq 16$ 32	80
180	226	$i_N \leq 16$ 38	80	$i_N \geq 18$ 32	80
200	282	$i_N \leq 14$ 48	110	$i_N \geq 16$ 38	80
225	282	$i_N \leq 16$ 48	110	$i_N \geq 18$ 38	80
250	357	$i_N \leq 14$ 55	110	$i_N \geq 16$ 48	110
280	357	$i_N \leq 16$ 55	110	$i_N \geq 18$ 48	110

*Machined surface and N.2 threaded holes (dimensions in ch. 6 <<Input face>>) on opposite side (not in view) too.

1) Working length of thread 2 · F.

2) Working length of thread 2 · K₁.

3) For holes dimensions, number and angular position see ch. 3.5.

4) Tolerance +0.0004/+0.001 in (+0.009/+0.025 mm) for motors size ≤ N280TC, -0.0012/0 in (-0.030/0 mm) for N320TC, N360TC, N400TC, -0.0014/0 in (-0.035/0 mm) for N440TC

5) Tolerance 0/+0.0014 in (0/+0.036 mm) for N210TC and N250TC, 0/+0.0017 in (0/+0.043 mm) for N280TC, N320TC, N360TC, 0/+0.002 in (0/+0.052 mm) for N400TC and N440TC.

6) Tolerance -0.0007/+0.0007 in (-0.017/+0.017 mm), -0.0011/+0.0011 in (-0.028/+0.028 mm) for motor size ≥ N320TC.


7) Out of standard dimension; a suitable modified key is supplied together with the gearmotor.



33

Designs (direction of rotation)

MR CI 125 ... 280

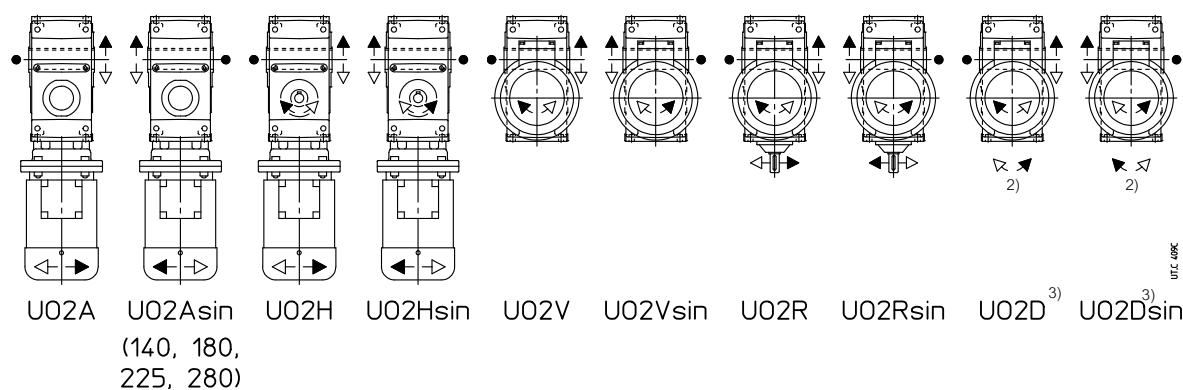

● Position of reference groove (see ch. 3.5) for radial load verification.


2) Direction of rotation of high speed shaft extension not in view.

3) Design **not possible** for size 140, 180, 225, 280.

Mounting positions

Unless otherwise stated, gear reducers are supplied in mounting position **B3** (see ch. 3).

MR CI 125 ... 280

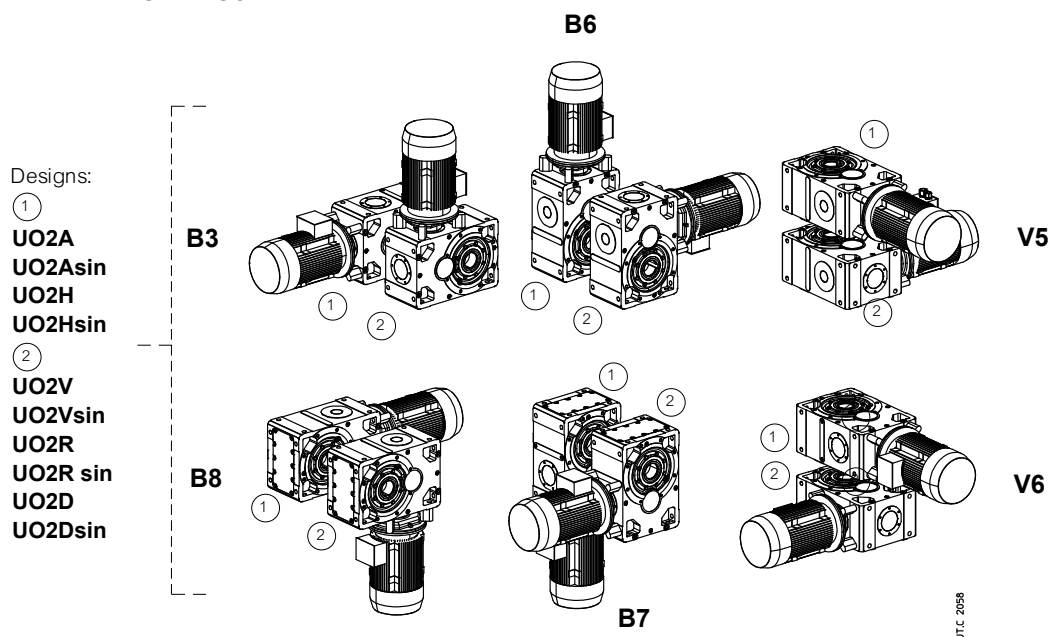

Oil quantity


MR CI 125 ... 280

Lubricant quantities [gal] stated are approximate for provisioning. The exact oil quantity the gear reducer is to be filled with is defined by the level plug.

Mounting position	125	140	160	180	200	225	250	280
B3	1.4	2.2	2.8	4.3	5.4	8.3	11	16
B8	1.4	1.5	2.8	2.8	5.4	5.5	11	11
B6	1.8	2.3	3.6	4.5	7.1	8.8	14	17
B7	2	2.6	4	5	7.7	9.8	15	19
V5	2.4	2.7	4.6	5.3	9	10	18	20
V6	2.4	2.7	4.6	5.3	9	10	18	20

Lubrication details

MR CI 125 ... 280

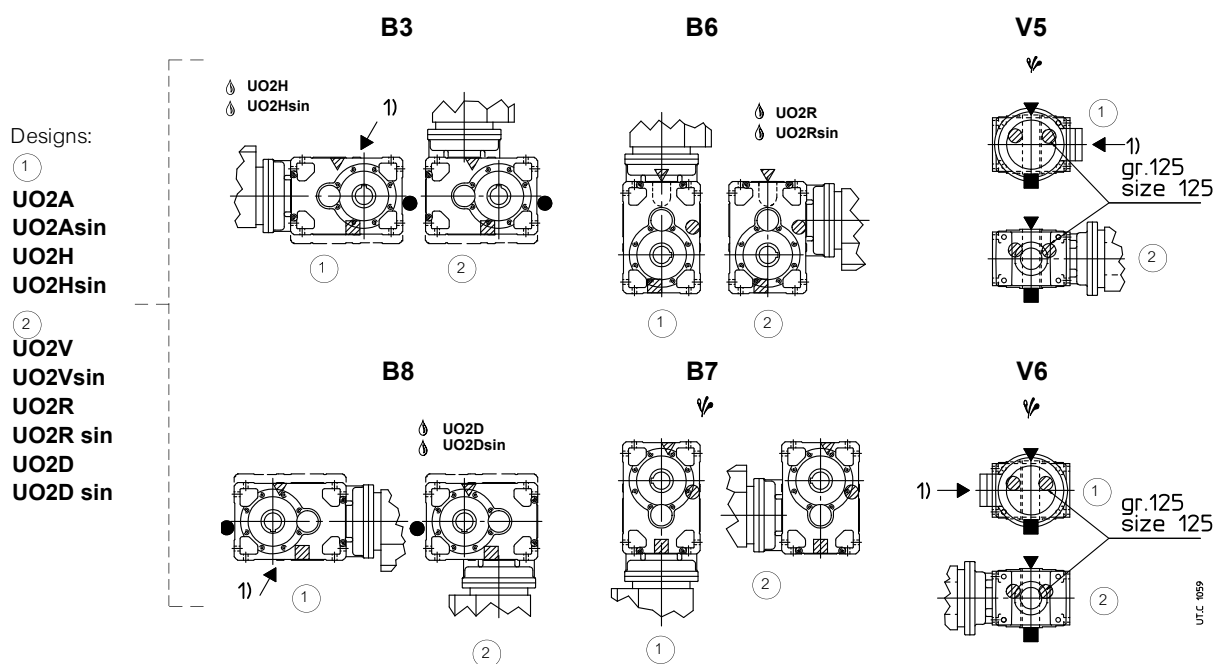

▼ Possible high oil splash: for the corrective factor f_{ts} of nominal thermal power P_{tN} see ch. 3.3.

● Possible bearing lubrication pump (see ch. 4 (19)).




1) Threaded hole position for mounting position identification.

▼ oil filler plug
● oil level plug
■ oil drain plug

▽ oil filler plug on opposite side (not in view)
◐ oil level plug on opposite side (not in view)
◑ oil drain plug on opposite side (not in view)

Gearmotors MR C2I

Dimensions MR C2I 140 ... 360

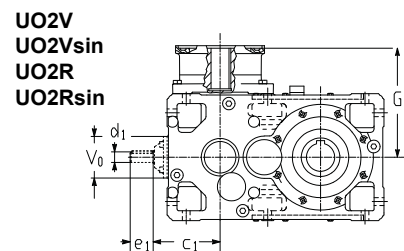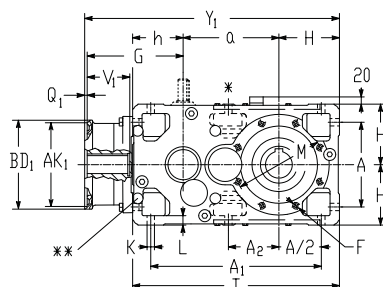

																					NEMA C-Face input side													
Gear red.	Size NEMA motor frame	a	A	A1	A2	B	D Ø	F	G	H	H1	h	K Ø	L	M	N Ø	P	Q	T	U	V0 Ø	Z	U1 Ø	V1	S1	t1	BF1 Ø	AJ1 Ø	AK1 Ø	BD1 Ø	Q1	Y1	Mass	
							in	1)	2)		h11	h12	h11			h6							in 4)	in	in 5)	in	in	in	in 6)	in 8)				
140	N180TC N210TC	240	212	427	127	162	2.75	3)	213 213 243		150	103.5	125	18	23	265	230	300	4	515	201	104	125	1.125 1.375	2.620 3.125	0.250 0.312	1.241 1.518	0.551 0.551	7.25 7.25	8.5 8.5	9.055 9.055	0.217 0.217	609 609	290 290
160	N180TC N210TC N250TC N280TC	285	252	507	150*	201	3.25	M16	238 238 238 259	269 269 269 284	180	128.5	150	22	28	265	230	300	4	615	249	122	136	1.125 1.375 1.625 1.875	2.620 3.125 3.750 4.375	0.250 0.312 0.375 0.500	1.241 1.518 1.796 2.017 ⁷⁾	0.551 0.551 0.551 0.551	7.25 7.25 7.25 9	8.5 8.5 8.5 10.5	9.055 9.055 9.055 11.024	0.217 0.217 0.217 0.217	709 709 709 730	445 445 445 445
180	N180TC N210TC N250TC N280TC	305	252	527	170	201	3.625	M16	238 238 238 259	269 269 269 284	180	128.5	150	22	28	300	250	350	5	635	249	122	150	1.125 1.375 1.625 1.875	2.620 3.125 3.750 4.375	0.250 0.312 0.375 0.500	1.241 1.518 1.796 2.017 ⁷⁾	0.551 0.551 0.551 0.551	7.25 7.25 7.25 9	8.5 8.5 8.5 10.5	9.055 9.055 9.055 11.024	0.217 0.217 0.217 0.217	2349 2349 2349 2370	490 490 490 490
200	N210TC N250TC N280TC N320TC	360	320	635	198*	250	4	3)	269 269 285 301	329 329 329 352	225	158	180	27	34	350	300	400	5	765	307	155	167	1.375 1.625 1.875 2.125	3.125 3.750 4.375 5.000	0.313 0.375 0.500 0.500	1.518 1.796 2.096 2.350	0.551 0.551 0.551 0.689	7.25 7.25 9	8.5 8.5 10.5	9.640 ⁸⁾ 9.640 ⁸⁾ 11.250 13.071	0.217 0.217 0.217 0.217	860 860 876 892	750 750 760 760
225	N210TC N250TC N280TC N320TC	385	320	660	223	250	4.25	M20	269 269 285 301	329 329 329 352	225	158	180	27	34	400	350	450	5	790	307	155	180	1.375 1.625 1.875 2.125	3.125 3.750 4.375 5.000	0.313 0.375 0.500 0.500	1.518 1.796 2.096 2.350	0.551 0.551 0.551 0.689	7.25 7.25 9	8.5 8.5 10.5	9.640 ⁸⁾ 9.640 ⁸⁾ 11.250 13.071	0.217 0.217 0.217 0.217	885 885 901 917	815 815 825 825
250	N250TC N280TC N320TC N360TC N400TC	450	396	791	247*	310	5	3)	314 330 395 395 395	390 390 430 430 430	280	195	225	33	42	500	450	550	5	955	380	190	206	1.625 1.875 2.125 2.375 2.875	3.750 4.375 5 5.625 7	0.375 0.5 0.5 0.625 0.75	1.796 2.096 2.35 2.651 3.205	0.551 0.551 0.689 0.689 0.689	7.25 9	8.5 10.5	10 11.27 14 14 14	0.217 0.217 0.217 0.217 0.217	1050 1066 1131 1131 1131	1295 1295 1335 1335 1335
280	N250TC N280TC N320TC N360TC N400TC	480	396	821	277	310	5.5	M24	314 330 395 395 395	390 390 430 430 430	280	195	225	33	42	500	450	550	5	985	380	190	222	1.625 1.875 2.125 2.375 2.875	3.750 4.375 5 5.625 7	0.375 0.375 0.5 0.625 0.75	1.796 2.096 2.35 2.651 3.205	0.551 0.551 0.689 0.689 0.689	7.25 9	8.5 10.5	10 11.27 14 14 14	0.217 0.217 0.217 0.217 0.217	1080 1096 1161 1161 1161	1415 1415 1455 1455 1455
320 321	N250TC N360TC N400TC N440TC	570	510	1005	318*	386	6.25	3)	451 451 451 483	496 496 496 541	355	241	280	39	52	600	550	660	6	1205	470	235	254	2.125 2.375 2.875 3.375	5 5.625 7 8.25	0.5 0.625 0.75 0.875	2.35 2.651 3.205 3.76	0.689 0.689 0.689 0.689	11 11 11	12.5 12.5 12.5	14 14 14 16	0.217 0.217 0.217 0.217	1382 1382 1382 1414	2305 2305 2305 2354
360	N320TC N360TC N400TC N440TC	610	510	1045	358	386	7	M30	451 451 451 483	496 496 496 541	355	241	280	39	52	600	550	660	6	1245	470	235	273	2.125 2.375 2.875 3.375	5 5.625 7 8.25	0.5 0.625 0.75 0.875	2.35 2.651 3.205 3.76	0.689 0.689 0.689 0.689	11 11 11	12.5 12.5 12.5	14 14 14 16	0.217 0.217 0.217 0.217	1422 1422 1422 1454	2515 2515 2515 2564

Gear reducer size	2nd input shaft end								
	c1	d1	e1	c1	d1	e1	c1	d1	e1
		$i_N \leq 28$			$i_N = 31,5 \dots 63$			$i_N \geq 71$	
140	157	24	50	157	24	50	157	19	40
160	188	28	60	188	28	60	188	24	50
180	188	28	60	188	28	60	188	24	50
200	226	38	80	226	38	80	226	32	80
225	226	38	80	226	38	80	226	32	80
250	282	48	110	282	48	110	282	38	80
280	282	48	110	282	48	110	282	38	80
320	380	70	140	357	55	110	357	48	110
321									
360	380	70	140	357	55	110	357	48	110

* Machined surface and N. 4 threaded holes (dimensions in ch. 6 «Input face») on opposite side (not in view) too.

** Only No. 2 holes M 16 x 32 (size 160), M 20 x 38 (size 200), M 24 x 46 (size 250), and M 30 x 58 (size 320), and not for UO2A design.

1) Working length for thread 2 - F.

2) Values valid for ...V, ...Vsin, ...R, ...Rsin design.

3) For holes dimensions, number and angular position see ch. 3.5..


4) Tolerance 0/+0.0005 in (0/+0.013 mm) for N180TC, +0.0004/+0.001 in (+0.009/+0.025 mm) for motors size ≤ N280TC, -0.0012/0 in (-0.030/0 mm) for N320TC, N360TC, N400TC, -0.0014/0 in (-0.035/0 mm) for N440TC.

5) Tolerance 0/+0.0014 in (0/+0.036 mm) for N180TC, N210TC and N250TC, 0/+0.0017 in (0/+0.043 mm) for N280TC, N320TC, N360TC, 0/+0.002 in (0/+0.052 mm) for N400TC and N440TC.

6) Tolerance -0.0007/+0.0007 in (-0.017/+0.017 mm), -0.0011/+0.0011 in (-0.028/+0.028 mm) for motor size ≥ N320TC


7) Out of standard dimension; a suitable modified key is supplied together with the gearmotor.

8) BD1 = 9.055 for ...V, ...Vsin, ...R, ...Rsin design.



Designs (direction of rotation)

MR C2I 140 ... 360

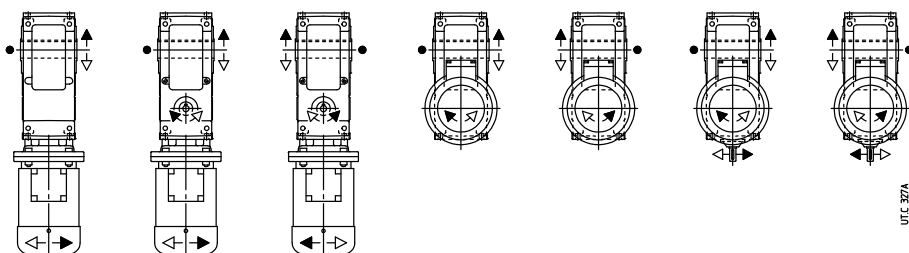


U02A¹⁾ U02H U02Hsin U02V U02Vsin U02R U02Rsin

● Position of reference groove (see ch. 3.5) for radial load verification.
1) The housing of this design is not pre-arranged for other designs.

Mounting positions

Unless otherwise stated, gear reducers are supplied in mounting position **B3** (see ch. 3).

MR C2I 140 ... 360

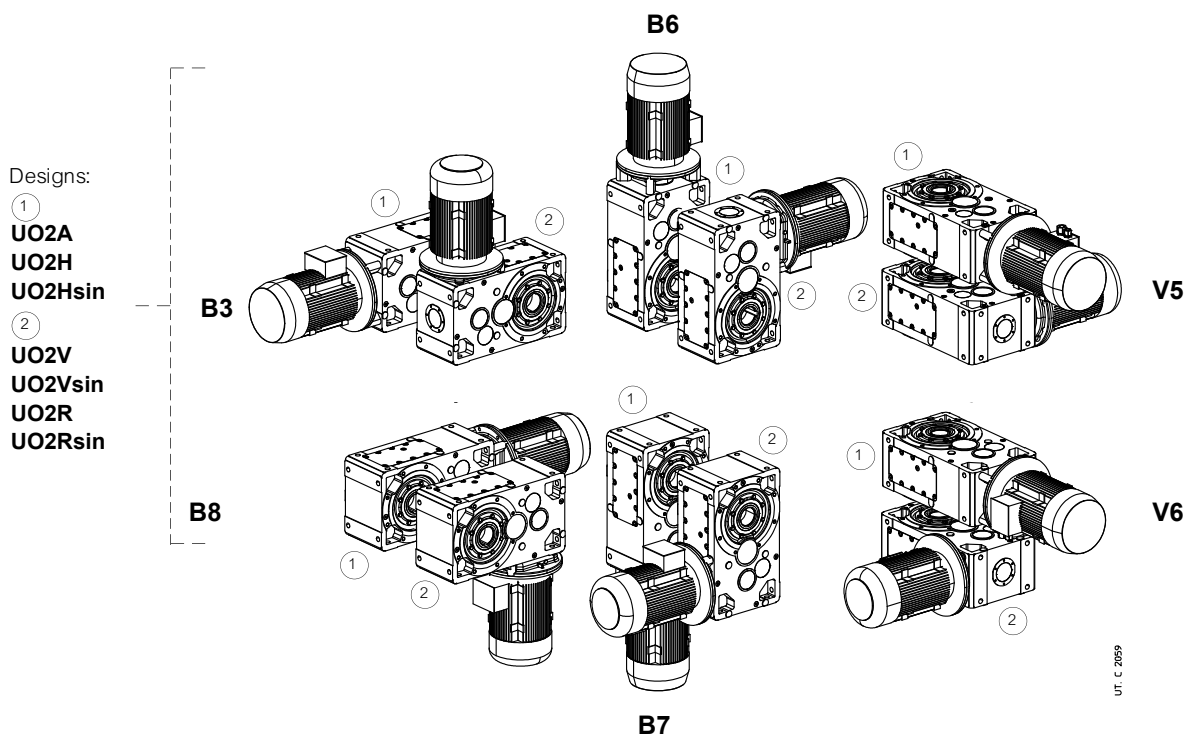


Oil quantity MR C2I 140 ... 360

Lubricant quantities [gal] stated are approximate for provisioning. The exact oil quantity the gear reducer is to be filled with is defined by the level plug.

	140	160	180	200	225	250	280	320, 321	360
B3	1.7	3.2	3.4	6.6	6.9	12	13	26	26
B8	1.7	3.2	3.4	6.6	6.9	12	13	26	26
B6	2.9	5.3	5.5	10	11	20	21	40	41
B7	2.6	4.8	5	9.2	9.8	18	19	36	37
V5	2.6	4.8	5	9.2	9.8	18	19	36	37
V6	2.6	4.8	5	9.2	9.8	18	19	36	37

Lubrication details

MR C2I 140 ... 360

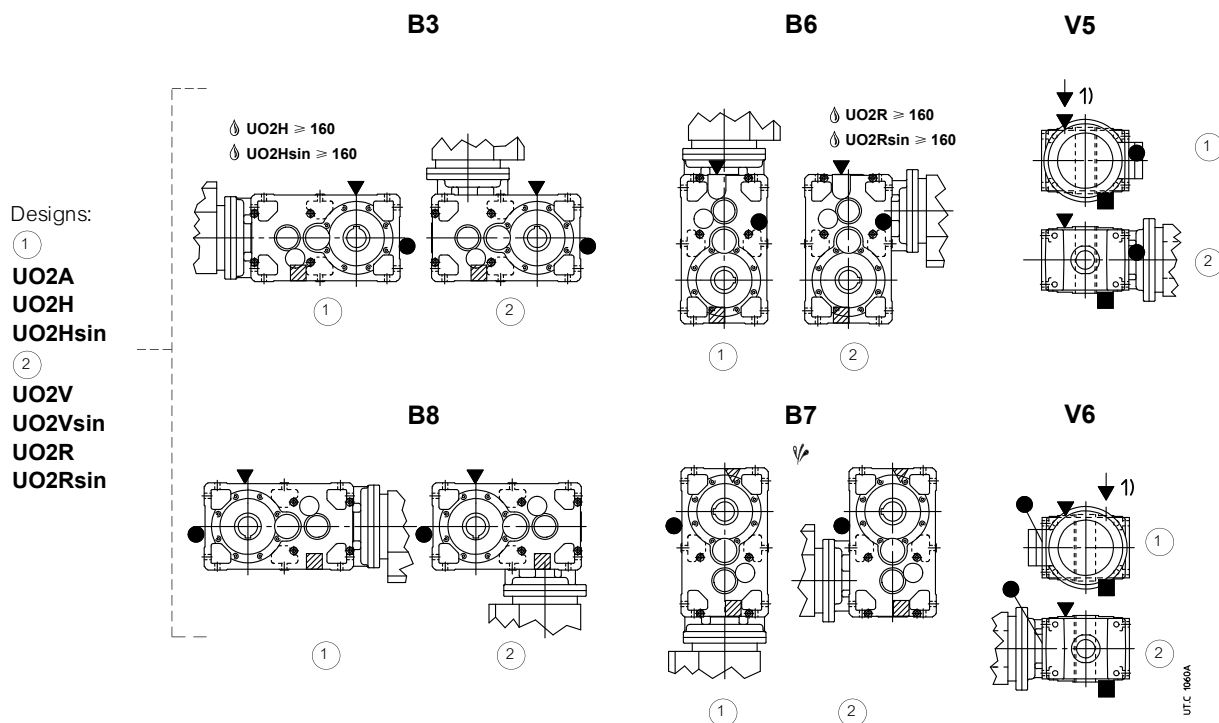

▼ Possible high oil splash: for the corrective factor f_3 of nominal thermal power P_{tN} see ch. 3.3.

⚙ Possible bearing lubrication pump (see ch 4 (19)).

1) Position of intermediate hole for mounting position identification.

▼ oil filler plug

● oil level plug

■ oil drain plug

▼ oil drain plug on opposite side (not in view)

● oil level plug on opposite side (not in view)

■ oil drain plug on opposite side (not in view)


Axial loads F_{a2}

Permissible F_{a2} is shown in the column where direction of rotation of low speed shaft (black or white arrow) and direction of the axial force (solid or broken arrow) correspond to those of the gearmotor in question. Direction of rotation and direction of force may be established viewing the gear reducer from any point (from groove side or from opposite side to groove, indifferently), providing the same point is adopted for rotation and axial load (see fig. below).

Notes:

- White and black arrows of present chapter do not refer to the ones stating the correspondence of direction of rotation for the different designs (see ch. 3.7 and 3.9);
- Wherever possible, choose the load conditions corresponding to the column with the highest admissible values.
- The values stated in the table are valid for the center line axial load; in the event of a misaligned axial load, consult us.

Radial loads F_{r2}

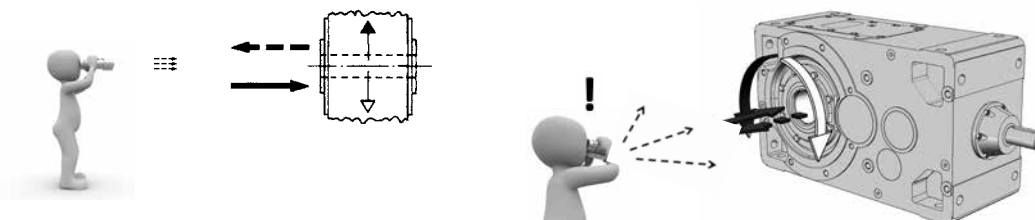

Radial loads generated on the shaft end by a drive connecting gearmotor and machine must be less than or equal to those given in the following pages.

Normally, radial loads on low speed shaft ends are considerable: in fact there is a tendency to connect the gearmotor to the machine by means of a transmission with high transmission ratio (economizing on the gearmotor) and with small diameters (economizing on the drive, and for requirements dictated by overall dimensions).

Bearing life and wear (which also affect gears unfavourably) and low speed shaft strength, clearly impose limits on permissible radial load.

The permissible radial loads stated in the tables are according to: low speed shaft end where the radial load is applied according to reference groove (see ch. 3) of the product of angular speed n_2 [rpm] multiplied by the bearing life required L_h [h], of direction of rotation, of angular position φ [°] of load and of torque required T_2 [lbf in].

The radial loads given in the tables are valid for loads on shaft center line of low speed shaft, i.e. at a distance from shoulder of $0.5 \cdot E$ (E = shaft end length); in the event of radial load acting in a different position (not center line), i.e. at a distance from shoulder different from $0.5 \cdot E$, re-calculate the permissible value of radial load according to the following formula, verifying simultaneously not to exceed the maximum value F_{r2max} given in the tables.

$$F_{r2}' = F_{r2} \cdot \frac{E/2 + y}{x + y} \quad [\text{lb}]$$

where:

F_{r2}' [lb] is the permissible radial load acting at distance x from the shoulder;

F_{r2} [lb] is the permissible radial load acting on center line of high speed shaft end (see table on following pages);

E [mm] is the shaft end length (see ch. 4);

y [mm] is given in the table;

x [mm] is the distance of load application starting from shaft shoulder.

	125	140	160	180	200	size 225 1)	250	280 1)	320, 321	360 1)
y	166	189	205	228	258	287 (279)	318	351 (344)	398	432 (424)

1) Values in brackets are valid for «Solid low speed shaft», see ch. 4.

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Chain drives

This drive is usually advised for low tip speeds ($v \leq 1.5$ ft/s with periodical lubrication, $v \leq 4.5$ ft/s with drop lubrication) and for this reason it is usually placed between gear reducer and machine. Compared with gear transmissions it offers the advantage of a high flexibility, allowing larger misalignments and higher distances among the shaft to be connected.

On the other hand, it is less suitable with alternate shock operations, in particular with high tip speed (shocks, noise, clearance worsening) and requires a specific maintenance as it is subjected to wear and periodic clearance taking up.

For the correct belt drive dimensioning refer to specific manufacturer's literature; as a rough guide, we can assume:

$$p \approx 0.5 \cdot D$$

$$d = p \cdot z / \pi$$

where:

p chain pitch

D diameter of gear reducer shaft end

d pinion pitch diameter

z pinion number of teeth

Keep in mind that the number of pinion teeth **z**, except some particular cases, should be at least **17** (the numbers of teeth classically adopted are: 17, 19, 21, 23) and that the smaller the pitch, the quieter the chain;

As a rough guide, for a rapid evaluation of the radial load generated by the low speed shaft end of gear reducer from chain drive, see the table including:

- the **pitch diameter** values **d** of pinion and the **maximum transmissible power**, for two pinion speeds, according to pitch p and teeth number z
- the **maximum pinion width** b_{max} , the **mass** and the **maximum breaking load** R_R of chain, according to the pitch and to the chain (simple, double or triple).

No. teeth z	Pitch p [in]																	
	0.5 (1/2)		0.625 (5/8)		0.75 (3/4)		1		1.25 (1 1/4)		1.5 (1 1/2)		1.75 (1 3/4)		2			
	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp	d in	P_{max} hp
	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm	50 rpm	100 rpm
15	2.39	0.36	1.22	2.98	0.54	0.94	3.58	0.80	1.61	4.77	2.41	4.56	5.97	4.29	8.05	7.16	6.84	12.7
16	2.55	0.39	1.34	3.18	0.54	1.07	3.82	0.94	1.88	5.09	2.55	4.69	6.37	4.56	8.45	7.64	7.38	13.4
17	2.71	0.43	1.41	3.38	0.67	1.07	4.06	1.07	2.01	5.41	2.68	4.96	6.76	4.83	9.12	8.12	7.78	14.8
18	2.86	0.46	1.50	3.58	0.67	1.21	4.30	1.07	2.01	5.73	2.95	5.36	7.16	5.10	9.66	8.59	8.31	16.1
19	3.02	0.48	1.58	3.78	0.67	1.21	4.54	1.21	2.15	6.05	3.08	5.63	7.56	5.50	10.2	9.07	8.85	16.1
20	3.18	0.50	1.69	3.98	0.80	1.21	4.77	1.21	2.28	6.37	3.22	5.90	7.96	5.77	10.7	9.55	9.25	17.4
21	3.34	0.51	1.78	4.18	0.80	1.34	5.01	1.34	2.41	6.68	3.35	6.30	8.36	6.17	11.4	10.0	9.79	18.8
22	3.50	0.54	1.89	4.38	0.80	1.34	5.25	1.34	2.55	7.00	3.62	6.57	8.75	6.44	11.9	10.5	10.3	18.8
23	3.66	0.55	2.01	4.58	0.80	1.48	5.49	1.48	2.68	7.32	3.75	6.97	9.15	6.71	12.5	11.0	10.9	20.1
24	3.82	0.58	2.12	4.77	0.80	1.48	5.73	1.48	2.82	7.64	3.89	7.24	9.55	7.11	13.1	11.5	11.4	21.5
25	3.98	0.60	2.21	4.97	0.94	1.48	5.97	1.61	2.95	7.96	4.16	7.64	9.95	7.38	13.4	11.9	11.8	22.8
26	4.14	0.63	2.29	5.17	0.98	1.53	6.21	1.68	3.07	8.28	4.26	7.78	10.3	7.58	13.8	12.4	12.2	23.9
27	4.30	0.66	2.39	5.37	1.02	1.60	6.45	1.74	3.19	8.59	4.36	7.91	10.7	7.71	14.2	12.9	12.9	24.8
28	4.46	0.68	2.55	5.57	1.07	1.74	6.68	1.88	3.49	8.91	4.43	8.05	11.1	7.91	14.8	13.4	13.4	25.5
29	4.62	0.71	2.64	5.77	1.11	1.81	6.92	1.94	3.62	9.23	4.56	8.33	11.5	8.18	15.6	13.8	14.2	26.3
30	4.77	0.74	2.68	5.97	1.21	1.88	7.16	2.01	3.75	9.55	4.69	8.72	11.9	8.45	16.1	14.3	14.8	26.8

Pitch p in	Chain type								
	b_{max} in	simple weight lbf / ft	R_R lbf	b_{max} in	double weight lbf / ft	R_R lbf	b_{max} in	triple weight lbf / ft	R_R lbf
1/2	0.94	0.27	3 150	1.54	0.94	6 300	2.09	1.34	9 500
5/8	1.06	0.60	5 000	1.73	1.14	10 000	2.40	1.68	15 000
3/4	1.18	0.81	7 100	2.05	1.61	14 000	2.80	2.49	21 200
1	1.81	1.81	12 500	3.11	3.49	25 000	4.37	5.38	37 500
1 1/4	1.97	2.42	20 000	3.58	4.84	40 000	5.04	7.39	60 000
1 1/2	2.56	4.50	28 000	4.53	9.07	56 000	6.46	14.1	85 000
1 3/4	3.07	5.58	40 000	5.51	11.4	80 000	7.87	16.8	118 000
2	3.07	7.06	50 000	5.55	14.1	100 000	7.87	21.5	150 000

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load F_{r2} for most common drives has the following value and angular position:

$$F_{r2} = \frac{315\,150 \cdot P_2}{d \cdot n_2} \text{ [lb]}$$


for V-belt drive

$$F_{r2} = \frac{134\,110 \cdot P_2}{d \cdot n_2} \text{ [lb]}$$

for spur gear pair drive


$$F_{r2} = \frac{447\,550 \cdot P_2}{d \cdot n_2} \text{ [lb]}$$

for friction wheel drive (rubber-on-metal)

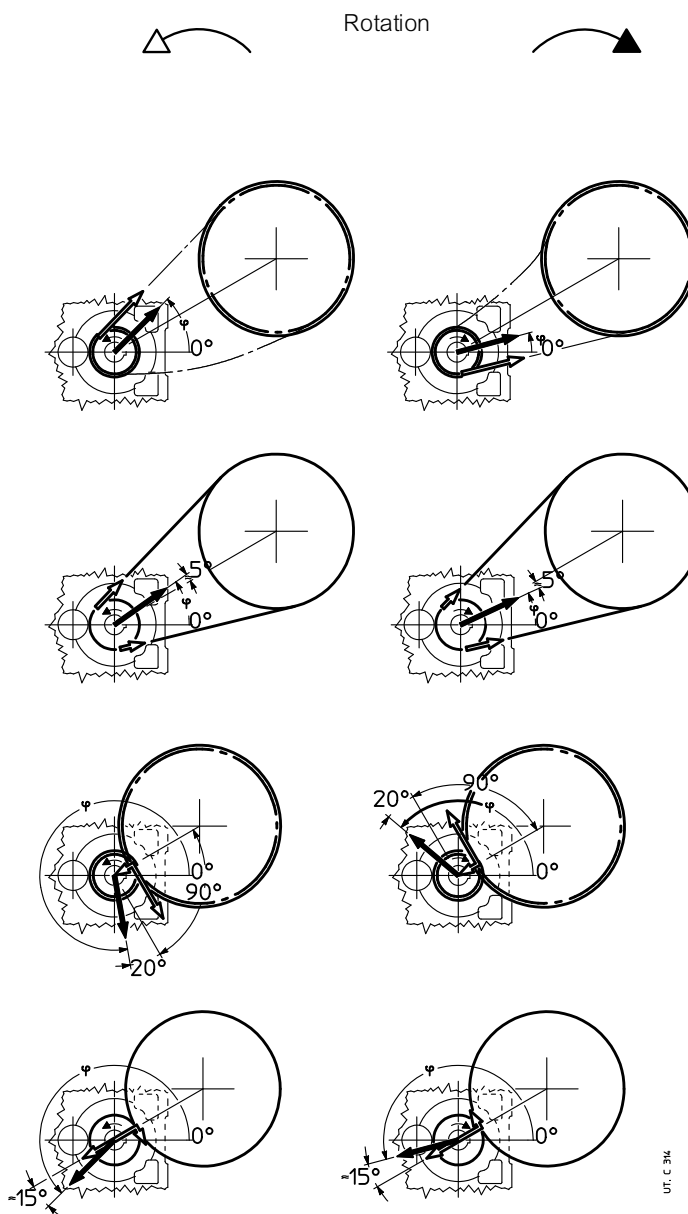

where: P_2 [hp] is power required at the output side of the gear reducer, n_2 [rpm] is the speed, d [in] is the pitch diameter.

IMPORTANT: 0° coincides with a straight line concurrent with the axis of the last reduction and orientated as shown above, and therefore it follows the rotation of the housing, as shown below.

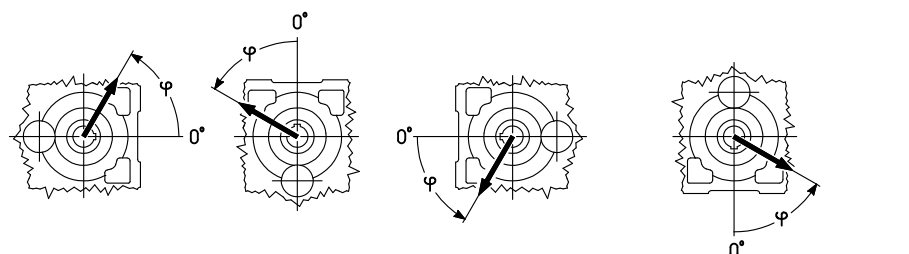


blank page

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **opposite side to groove**

Size **125**

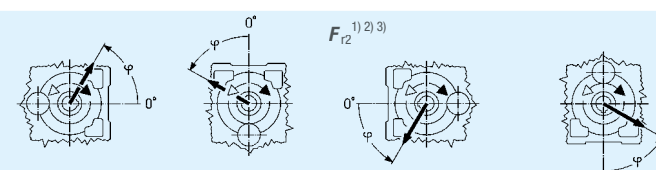$n_2 \cdot L_h$	T_2																	$F_{a2}^{(1)}$	
rpm · h	lb in	0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
355 000	22 400	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 250	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	3 150	1 600
	16 000	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	3 150	1 600
450 000	22 400	4 250	4 500	4 500	4 500	4 500	4 500	4 250	4 000	4 500	4 500	4 500	4 500	4 250	4 500	4 500	4 500	3 150	1 600
	16 000	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 250	4 500	4 500	4 500	4 500	4 500	4 500	4 500	4 500	3 150	1 600
560 000	22 400	3 750	4 250	4 500	4 500	4 500	4 500	4 000	3 550	4 500	4 500	4 000	4 000	3 750	4 000	4 500	4 500	3 150	1 500
	16 000	4 250	4 500	4 500	4 500	4 500	4 500	4 250	4 000	4 500	4 500	4 250	4 250	4 500	4 500	4 500	4 500	3 150	1 600
710 000	22 400	3 350	3 550	4 000	4 500	4 500	4 500	3 550	3 150	4 500	4 250	3 750	3 550	3 350	3 550	4 250	4 500	3 000	1 250
	16 000	3 750	4 500	4 500	4 500	4 500	4 500	4 000	3 550	4 500	4 250	4 000	4 000	4 250	4 500	4 500	4 500	3 000	1 600
900 000	22 400	3 150	3 150	3 550	4 250	4 500	4 250	3 350	3 000	4 500	3 750	3 350	3 150	2 800	3 150	3 550	4 250	2 650	1 060
	16 000	3 550	4 000	4 500	4 500	4 500	4 250	3 550	3 350	4 500	4 000	3 550	3 550	3 750	4 000	4 500	4 500	2 800	1 600
	11 200	3 750	4 250	4 500	4 500	4 500	4 250	3 750	3 550	4 500	4 000	3 750	3 750	4 000	4 500	4 500	4 500	2 800	1 600
1 120 000	22 400	2 800	2 650	3 150	3 750	4 250	4 000	3 000	2 650	4 250	3 550	3 150	2 650	2 360	2 650	3 350	3 750	2 500	850
	16 000	3 150	3 750	4 000	4 500	4 500	4 000	3 350	3 000	4 250	3 750	3 350	3 350	3 350	3 550	4 000	4 500	2 650	1 400
	11 200	3 350	3 750	4 500	4 500	4 500	4 000	3 550	3 350	4 250	3 750	3 550	3 550	3 750	4 250	4 500	4 500	2 650	1 600
1 400 000	16 000	3 000	3 350	3 550	4 000	4 500	3 750	3 150	2 800	4 000	3 350	3 150	3 150	3 150	3 150	3 550	4 000	2 360	1 180
	11 200	3 150	3 550	4 250	4 500	4 250	3 750	3 350	3 150	4 000	3 550	3 350	3 350	3 550	3 750	4 250	4 250	2 500	1 600
1 800 000	16 000	2 650	3 000	3 150	3 550	4 000	3 350	2 800	2 500	3 750	3 150	2 800	2 800	2 650	2 800	3 150	3 550	2 240	1 000
	11 200	3 000	3 350	3 750	4 250	4 000	3 550	3 000	2 800	3 550	3 350	3 150	3 000	3 150	3 550	3 750	4 000	2 240	1 400
2 240 000	16 000	2 500	2 650	2 800	3 350	3 750	3 150	2 500	2 240	3 550	3 000	2 650	2 500	2 240	2 500	3 000	3 350	2 120	900
	11 200	2 650	3 150	3 550	3 750	3 750	3 150	2 800	2 650	3 350	3 150	2 800	2 800	3 000	3 150	3 350	3 750	2 120	1 250
2 800 000	11 200	2 500	3 000	3 150	3 550	3 550	3 000	2 650	2 360	3 150	2 800	2 650	2 650	2 800	3 000	3 150	3 550	2 000	1 120
	8 000	2 650	3 000	3 350	3 550	3 350	3 150	2 650	2 500	3 150	3 000	2 800	2 800	3 000	3 150	3 350	3 350	2 000	1 400
3 550 000	11 200	2 240	2 650	3 000	3 150	3 350	2 800	2 360	2 120	3 000	2 650	2 360	2 360	2 500	2 650	2 800	3 150	1 800	1 000
	8 000	2 500	2 800	3 150	3 350	3 150	2 800	2 500	2 360	3 000	2 650	2 500	2 500	2 650	3 000	3 150	3 150	1 900	1 250
4 500 000	11 200	2 120	2 360	2 650	3 000	3 150	2 650	2 120	2 000	2 800	2 500	2 240	2 240	2 240	2 240	2 650	3 000	1 700	900
	8 000	2 240	2 500	3 000	3 150	3 000	2 650	2 360	2 120	2 800	2 500	2 360	2 360	2 500	2 800	3 000	3 000	1 700	1 120
5 600 000	11 200	1 900	2 120	2 360	2 650	3 000	2 500	2 000	1 800	2 650	2 240	2 000	2 000	1 900	2 000	2 360	2 650	1 600	750
	8 000	2 120	2 360	2 800	3 000	2 800	2 500	2 120	2 000	2 650	2 360	2 120	2 120	2 360	2 500	2 650	2 800	1 600	1 000
7 100 000	11 200	1 800	1 900	2 000	2 360	2 650	2 240	1 800	1 700	2 500	2 120	1 900	1 800	1 700	1 800	2 120	2 360	1 500	630
	8 000	1 900	2 240	2 500	2 800	2 650	2 240	2 000	1 800	2 360	2 120	2 000	2 000	2 120	2 240	2 500	2 650	1 500	900
max		4 500																3 150	1 600


Size **140**

280 000	33 500	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 000	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	4 000	2 000	
	23 600	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	4 000	2 000	
355 000	33 500	5 600	6 300	6 300	6 300	6 300	6 300	6 300	6 000	5 300	6 300	6 300	6 000	6 000	6 300	6 300	6 300	6 300	4 000	2 000	
	23 600	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 000	6 000	6 300	6 300	6 300	6 300	6 300	6 300	6 300	6 300	4 000	2 000	
450 000	33 500	5 300	6 300	6 300	6 300	6 300	6 300	6 300	5 300	4 750	6 300	6 000	5 600	5 600	5 600	6 000	6 300	6 300	4 000	2 000	
	23 600	5 600	6 300	6 300	6 300	6 300	6 300	6 300	6 000	5 300	6 300	6 300	6 000	6 000	6 300	6 300	6 300	6 300	4 000	2 000	
560 000	33 500	4 750	5 300	6 000	6 300	6 300	6 300	6 300	5 000	4 500	6 300	5 600	5 000	5 000	4 750	5 300	6 000	6 300	3 750	1 700	
	23 600	5 300	6 000	6 300	6 300	6 300	6 300	6 300	5 300	5 000	6 300	6 000	5 300	5 300	6 000	6 300	6 300	6 300	4 000	2 000	
710 000	33 500	4 250	4 750	5 300	6 300	6 300	5 600	4 500	4 000		6 300	5 300	4 500	4 500	4 250	5 600	4 500	4 000	3 550	1 400	
	23 600	4 750	5 600	6 300	6 300	6 300	6 000	5 000	4 500		6 300	5 300	5 000	5 000	5 600	6 000	6 300	6 300	3 550	2 000	
	17 000	5 000	5 600	6 300	6 300	6 300	6 000	5 300	5 000		6 000	5 600	5 300	5 300	5 600	6 300	6 300	6 300	3 750	2 000	
900 000	33 500	4 000	4 000	4 750	5 600	6 000	5 300	4 000	3 550		6 000	4 750	4 250	3 750	3 550	4 000	4 750	5 300	3 350	1 120	
	23 600	4 500	5 300	6 000	6 300	6 300	5 300	4 500	4 250		5 600	5 000	4 500	4 750	5 000	5 300	6 000	6 300	3 350	1 900	
	17 000	4 750	5 300	6 000	6 300	6 300	5 600	4 750	4 500		5 600	5 300	4 750	4 750	5 300	5 600	6 300	6 000	3 350	2 000	
1 120 000	23 600	4 000	5 000	5 300	6 000	6 000	5 000	4 250	3 750		5 300	4 750	4 250	4 250	4 500	4 750	5 300	6 000	3 150	1 700	
	17 000	4 500	5 000	5 600	6 000	6 000	5 000	4 500	4 250		5 300	4 750	4 500	4 500	4 750	5 300	5 600	5 600	3 150	2 000	
1 400 000	23 600	3 550	4 250	4 750	5 300	5 600	4 750	3 750	3 350		5 000	4 250	3 750	3 750	3 750	4 250	4 750	5 300	3 000	1 400	
	17 000	4 000	4 750	5 300	5 600	5 300	4 750	4 000	3 750		5 000	4 500	4 000	4 250	4 500	5 000	5 300	5 300	3 000	1 900	
1 800 000	23 600	3 350	3 750	4 250	4 750	5 300	4 250	3 350	3 150		4 750	4 000	3 550	3 550	3 350	3 750	4 250	4 750	2 650	1 180	
	17 000	3 550	4 250	5 000	5 300	5 000	4 500	3 750	3 550		4 750	4 000	3 750	3 750	3 750	4 250	4 500	5 000	2 800	1 700	
2 240 000	17 000	3 350	4 000	4 500	5 000	4 750	4 000	3 350	3 150		4 250	3 750	3 550	3 550	3 750	4 000	4 500	4 750	2 650	1 500	
	11 800	3 550	4 000	4 500	4 750	4 750	4 250	3 550	3 550		4 250	4 000	3 750	3 750	4 000	4 250	4 750	4 500	2 650	1 900	
2 800 000	17 000	3 150	3 750	4 250	4 500	4 500	3 750	3 150	3 000		4 000	3 550	3 150	3 150	3 550	3 550	4 000	4 500	2 360	1 320	
	11 800	3 350	3 750	4 250	4 500	4 250	3 750	3 350	3 350		4 000	3 550	3 350	3 350	3 550	4 000	4 250	4 250	2 500	1 700	
3 550 000	17 000	2 800	3 350	3 750	4 250	4 250	3 550	3 000	2 650		3 750	3 350	3 000	3 000	3 150	3 350	3 550	4 000	2 240	1 120	
	11 800	3 150	3 550	4 000	4 250	4 000	3 550	3 150	3 000		3 750	3 350	3 150	3 150	3 350	3 750	4 000	4 000	2 240	1 500	
4 500 000	17 000	2 650	3 150	3 350	3 750	4 000	3 350	2 650	2 360		3 550	3 000	2 800	2 800	2 800	3 000	3 350	3 550	2 000	1 000	
	11 800	2 800	3 350	3 750	4 000	3 750	3 350	3 000	2 800		3 550	3 150	3 000	3 000	3 150	3 550	3 750	3 750	2 120	1 400	
5 600 000	17 000	2 360	2 650	3 000	3 350	3 750	3 150	2 360	2 240		3 350	2 800	2 500	2 500	2 360	2 650	3 000	3 350	1 900	850	
	11 800	2 650	3 000	3 550	3 750	3 550	3 150	2 650	2 500		3 350	3 000	2 650	2 650	3 000	3 150	3 550	3 550	2 000	1 180	
max		6 300 (3 550 for «short side»)																		4 000	2 000

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **groove side** •

Size **125**

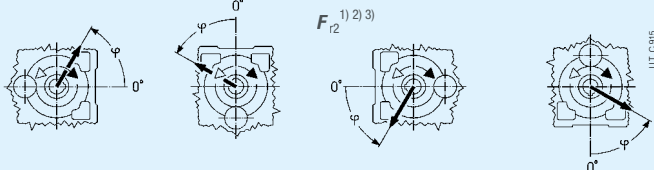$n_2 \cdot L_h$	T_2																	$F_{a2}^{1)}$	
		0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
355 000	22 400	3 750	4 500	4 500	4 500	4 500	4 500	3 350	3 150	4 500	4 000	3 550	4 000	4 500	4 500	4 500	4 500	3 150	1 600
	16 000	4 500	4 500	4 500	4 500	4 500	4 500	4 000	3 750	4 500	4 500	4 250	4 500	4 500	4 500	4 500	4 500	3 150	1 600
450 000	22 400	3 350	4 500	4 500	4 500	4 500	4 250	3 000	2 800	4 500	3 550	3 150	3 550	4 500	4 500	4 500	4 500	3 150	1 600
	16 000	4 000	4 500	4 500	4 500	4 500	4 500	3 550	3 350	4 500	4 000	3 750	4 250	4 500	4 500	4 500	4 500	3 150	1 600
560 000	22 400	3 000	4 500	4 500	4 500	4 500	3 750	2 650	2 360	4 500	3 150	3 000	3 350	4 500	4 500	4 500	4 500	3 150	1 500
	16 000	3 550	4 500	4 500	4 500	4 500	4 250	3 350	3 150	4 500	3 750	3 350	3 750	4 500	4 500	4 500	4 500	3 150	1 600
710 000	22 400	2 650	4 250	4 500	4 500	4 500	3 350	2 240	2 000	4 000	3 000	2 500	3 000	3 750	4 500	4 500	4 500	3 000	1 250
	16 000	3 350	4 500	4 500	4 500	4 500	4 000	3 000	2 800	4 250	3 350	3 150	3 350	4 500	4 500	4 500	4 500	3 000	1 600
900 000	22 400	2 240	3 750	4 500	4 500	4 500	3 150	1 900	1 800	3 550	2 500	2 240	2 650	3 350	4 500	4 500	4 500	2 650	1 060
	16 000	3 000	4 250	4 500	4 500	4 500	3 550	2 650	2 500	4 000	3 150	2 800	3 150	4 000	4 500	4 500	4 500	2 800	1 600
	11 200	3 350	4 250	4 500	4 500	4 500	3 750	3 150	3 000	4 000	3 350	3 150	3 550	4 250	4 500	4 500	4 500	2 800	1 600
1 120 000	22 400	1 900	3 350	4 500	4 500	4 500	2 800	1 700	1 500	3 350	2 240	1 900	2 360	3 000	4 000	4 500	4 500	2 500	850
	16 000	2 650	3 750	4 500	4 500	4 500	3 350	2 500	2 360	3 550	2 800	2 500	2 800	3 750	4 500	4 500	4 500	2 650	1 400
	11 200	3 150	4 000	4 500	4 500	4 500	3 550	3 000	2 800	3 750	3 150	3 000	3 150	3 750	4 500	4 500	4 500	2 650	1 600
1 400 000	16 000	2 360	3 550	4 500	4 500	4 500	3 000	2 120	1 900	3 350	2 500	2 240	2 650	3 550	4 250	4 500	4 500	2 360	1 180
	11 200	2 800	3 750	4 500	4 500	4 500	3 350	2 650	2 500	3 550	3 000	2 800	3 000	3 550	4 500	4 500	4 500	2 500	1 600
1 800 000	16 000	2 000	3 150	4 500	4 500	4 250	2 650	1 800	1 700	3 150	2 240	2 000	2 240	3 150	3 750	4 500	4 250	2 240	1 000
	11 200	2 650	3 350	4 500	4 500	4 000	3 150	2 360	2 240	3 350	2 650	2 500	2 650	3 350	4 250	4 500	4 000	2 240	1 400
2 240 000	16 000	1 800	3 000	4 000	4 500	4 000	2 360	1 600	1 400	2 800	2 000	1 800	2 000	2 650	3 550	4 000	4 000	2 120	900
	11 200	2 360	3 150	4 250	4 500	3 750	2 800	2 120	2 000	3 150	2 360	2 240	2 500	3 150	4 000	4 250	3 750	2 120	1 250
2 800 000	11 200	2 120	3 000	4 000	4 250	3 550	2 650	1 900	1 800	2 800	2 240	2 000	2 240	3 000	3 550	4 000	3 550	2 000	1 120
	8 000	2 360	3 150	3 750	4 000	3 550	2 800	2 240	2 120	3 000	2 500	2 360	2 500	3 000	3 550	3 750	3 550	2 000	1 400
3 550 000	11 200	1 900	2 800	3 750	4 000	3 350	2 360	1 700	1 600	2 650	2 000	1 800	2 000	2 650	3 350	3 550	3 350	1 800	1 000
	8 000	2 240	2 800	3 550	3 750	3 350	2 500	2 000	1 900	2 650	2 240	2 120	2 240	2 800	3 350	3 550	3 350	1 900	1 250
4 500 000	11 200	1 700	2 500	3 350	3 750	3 150	2 120	1 500	1 400	2 360	1 800	1 600	1 800	2 500	3 000	3 350	3 150	1 700	900
	8 000	2 000	2 650	3 350	3 550	3 150	2 360	1 800	1 700	2 500	2 000	1 900	2 120	2 500	3 150	3 350	3 150	1 700	1 120
5 600 000	11 200	1 500	2 360	3 150	3 550	3 000	1 900	1 320	1 180	2 240	1 600	1 400	1 700	2 240	2 800	3 150	3 150	1 600	750
	8 000	1 800	2 500	3 150	3 350	3 000	2 120	1 700	1 600	2 360	1 900	1 700	1 900	2 360	3 000	3 150	3 000	1 600	1 000
7 100 000	11 200	1 320	2 120	2 800	3 150	2 800	1 700	1 120	1 060	2 000	1 400	1 250	1 500	1 900	2 500	3 000	2 800	1 500	630
	8 000	1 700	2 240	3 000	3 150	2 800	2 000	1 500	1 400	2 120	1 700	1 600	1 700	2 240	2 800	3 000	2 800	1 500	900
max		4 500																3 150	1 600



Size **140**

280 000	33 500	5 300	6 300	6 300	6 300	6 300	6 300	5 000	4 500	6 300	5 600	5 000	5 600	6 300	6 300	6 300	6 300	4 000	2 000
	23 600	6 300	6 300	6 300	6 300	6 300	6 300	5 600	5 600	6 300	6 300	6 000	6 300	6 300	6 300	6 300	6 300	4 000	2 000
355 000	33 500	4 750	6 300	6 300	6 300	6 300	6 000	4 250	4 000	6 300	5 000	4 500	5 300	6 300	6 300	6 300	6 300	4 000	2 000
	23 600	5 600	6 300	6 300	6 300	6 300	6 300	5 300	5 000	6 300	6 000	5 300	6 000	6 300	6 300	6 300	6 300	4 000	2 000
450 000	33 500	4 250	6 300	6 300	6 300	6 300	5 600	3 750	3 550	6 300	4 750	4 250	4 750	6 300	6 300	6 300	6 300	4 000	2 000
	23 600	5 300	6 300	6 300	6 300	6 300	6 000	4 750	4 500	6 300	5 300	5 000	5 300	6 300	6 300	6 300	6 300	4 000	2 000
560 000	33 500	3 750	6 000	6 300	6 300	6 300	5 000	3 350	3 150	5 600	4 250	3 550	4 250	5 600	6 300	6 300	6 300	3 750	1 700
	23 600	4 750	6 300	6 300	6 300	6 300	5 600	4 250	4 000	6 000	4 500	4 500	4 750	6 000	6 300	6 300	6 300	4 000	2 000
710 000	33 500	3 350	5 300	6 300	6 300	6 300	4 500	3 000	2 650	5 300	3 550	3 150	3 750	4 750	6 300	6 300	6 300	3 550	1 400
	23 600	4 250	5 600	6 300	6 300	6 300	5 000	3 750	3 550	5 600	4 500	4 000	4 500	5 600	6 300	6 300	6 300	3 550	2 000
	17 000	4 750	6 000	6 300	6 300	6 300	5 300	4 500	4 250	5 600	4 750	4 500	4 750	5 600	6 300	6 300	6 300	3 750	2 000
900 000	33 500	3 000	4 750	6 300	6 300	6 300	4 000	2 500	2 240	4 750	3 350	3 000	3 350	4 250	5 600	6 300	6 300	3 350	1 120
	23 600	3 750	5 300	6 300	6 300	6 300	4 750	3 350	3 150	5 000	4 000	3 550	4 000	5 300	6 300	6 300	6 300	3 350	1 900
	17 000	4 250	5 600	6 300	6 300	6 300	5 000	4 000	3 750	5 300	4 500	4 250	4 500	5 300	6 300	6 300	6 300	3 350	2 000
1 120 000	23 600	3 350	5 000	6 300	6 300	6 300	4 250	3 150	2 800	4 750	3 550	3 350	3 550	4 750	6 000	6 300	6 300	3 150	1 700
	17 000	4 000	5 000	6 300	6 300	6 000	4 750	3 750	3 550	5 000	4 000	3 750	4 000	5 000	6 000	6 300	6 000	3 150	2 000
1 400 000	23 600	3 000	4 500	6 000	6 300	5 600	3 750	2 800	2 500	4 250	3 150	3 000	3 350	4 500	5 300	6 000	6 000	3 000	1 400
	17 000	3 550	4 750	6 000	6 300	5 600	4 250	3 350	3 150	4 500	3 750	3 350	3 750	4 500	5 600	6 000	5 600	3 000	1 900
1 800 000	23 600	2 650	4 250	5 600	6 300	5 300	3 550	2 360	2 240	4 000	3 000	2 650	3 000	3 750	4 750	5 600	5 600	2 650	1 180
	17 000	3 350	4 500	5 600	6 000	5 300	3 750	3 000	2 800	4 250	3 350	3 150	3 350	4 250	5 300	6 000	5 300	2 800	1 700
2 240 000	17 000	3 000	4 000	5 300	6 000	5 000	3 550	2 800	2 500	4 000	3 150	2 800	3 150	4 000	5 000	5 300	5 000	2 650	1 500
	11 800	3 350	4 250	5 000	5 300	4 750	3 750	3 150	3 000	4 000	3 350	3 150	3 350	4 000	4 750	5 000	4 750	2 650	1 900
2 800 000	17 000	2 650	3 750	5 000	5 600	4 750	3 350	2 360	2 240	3 550	2 800	2 500	3 000	3 550	4 500	5 000	4 750	2 360	1 320
	11 800	3 150	3 750	4 750	5 000	4 500	3 550	3 000	2 800	3 750	3 150	3 000	3 150	3 750	4 500	4 750	4 500	2 500	1 70

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **opposite side to groove**

Size **160**

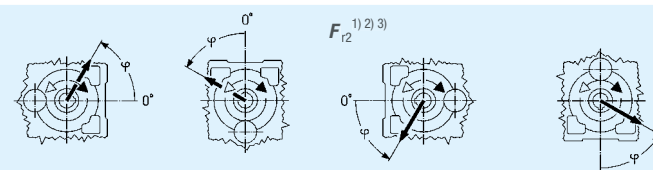$n_2 \cdot L_h$	T_2																		
		0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
280 000	50 000	8 000	8 000	8 000	7 500	7 500	7 100	7 100	7 500	6 700	6 300	6 700	8 000	8 000	8 000	8 000	8 000	2 500	5 000
	35 500	8 000	8 000	8 000	8 000	8 000	7 500	7 500	8 000	7 100	6 700	7 100	8 000	8 000	8 000	8 000	8 000	2 500	5 000
355 000	50 000	8 000	8 000	7 500	6 700	6 300	6 300	6 300	7 100	6 000	5 600	6 300	7 500	8 000	8 000	7 500	7 100	2 500	5 000
	35 500	8 000	8 000	8 000	8 000	7 100	6 700	6 700	7 100	6 700	6 300	6 700	7 500	8 000	8 000	8 000	7 500	2 500	5 000
450 000	50 000	7 500	7 500	6 700	6 000	5 600	6 000	6 000	6 300	5 600	5 300	5 600	7 100	8 000	7 500	6 700	6 300	2 360	4 750
	35 500	7 500	8 000	8 000	7 500	6 700	6 300	6 300	6 700	6 000	6 000	6 300	8 000	8 000	8 000	7 100	7 100	2 500	4 750
560 000	50 000	7 100	7 100	6 000	5 300	5 000	5 300	5 300	6 000	5 000	4 750	5 300	6 300	7 500	7 100	6 000	5 300	2 000	4 250
	35 500	7 100	7 500	7 100	6 700	6 300	5 600	5 600	6 300	5 600	5 300	5 600	6 700	7 500	8 000	7 100	6 300	2 500	4 500
710 000	50 000	6 700	6 300	5 000	4 500	4 250	4 500	5 000	5 600	4 500	4 250	4 750	6 000	6 700	6 300	5 300	4 750	1 700	4 000
	35 500	6 300	7 100	6 300	6 000	5 600	5 300	5 300	5 600	5 000	4 750	5 300	6 300	7 100	7 100	6 700	6 000	2 500	4 250
	25 000	6 300	7 100	7 100	6 300	6 000	5 600	5 600	6 000	5 600	5 300	5 600	6 300	7 100	7 100	6 700	6 000	2 500	4 250
900 000	50 000	6 300	5 600	4 250	3 750	3 550	3 750	4 500	5 000	4 250	3 750	4 250	5 600	6 300	5 600	4 500	4 000	1 320	3 550
	35 500	6 300	6 700	6 000	5 300	5 300	5 000	5 000	5 300	4 750	4 500	4 750	5 600	6 700	6 700	6 000	5 200	2 240	3 750
	25 000	6 000	6 300	6 300	6 000	5 600	5 300	5 300	5 600	5 000	4 750	5 000	6 000	6 700	6 700	6 300	5 600	2 500	4 000
1 120 000	35 500	5 600	6 000	5 300	4 750	4 500	4 500	4 500	5 000	4 250	4 000	4 500	5 300	6 300	6 000	5 300	5 000	1 900	3 550
	25 000	5 600	6 000	6 300	5 600	5 300	4 750	4 750	5 300	4 750	4 500	5 300	6 300	6 300	6 000	5 300	5 000	2 500	3 750
1 400 000	35 500	5 300	5 300	4 750	4 250	4 000	4 000	4 000	4 500	3 750	3 550	4 000	5 000	6 000	5 300	4 750	4 500	1 700	3 350
	25 000	5 300	5 600	5 600	5 000	4 750	4 500	4 500	4 750	4 250	4 000	4 250	5 000	5 600	6 000	5 600	5 000	2 240	3 350
1 800 000	35 500	5 000	5 000	4 250	3 750	3 550	3 750	3 750	4 250	3 550	3 350	3 550	4 750	5 300	4 750	4 250	3 750	1 400	3 150
	25 000	5 000	5 300	5 000	4 750	4 500	4 500	4 000	4 500	4 000	3 750	4 000	4 750	5 600	5 600	5 300	4 500	2 000	3 150
2 240 000	25 000	4 750	5 000	4 750	4 250	4 000	3 750	3 750	4 000	3 550	3 350	3 750	4 500	5 000	5 000	4 750	4 250	1 800	3 000
	18 000	4 500	5 000	5 000	4 500	4 250	4 000	4 000	4 250	3 750	3 750	4 000	4 500	5 000	5 300	4 750	4 250	2 240	3 150
2 800 000	25 000	4 250	4 750	4 250	3 750	3 550	3 350	3 350	3 750	3 350	3 150	3 350	4 000	4 500	4 750	4 250	4 000	1 600	2 800
	18 000	4 250	4 500	4 500	4 250	3 750	3 550	3 550	3 750	3 550	3 350	3 550	4 000	4 750	4 750	4 500	4 000	2 000	2 800
3 550 000	25 000	4 000	4 250	3 750	3 350	3 150	3 150	3 150	3 550	3 000	2 800	3 150	3 750	4 500	4 250	3 750	3 550	1 320	2 500
	18 000	4 000	4 250	4 250	4 000	3 550	3 350	3 350	3 550	3 350	3 150	3 350	3 750	4 250	4 500	4 250	3 750	1 800	2 650
4 500 000	25 000	3 750	3 750	3 350	3 000	2 800	3 000	3 000	3 150	2 800	2 650	2 800	3 550	4 250	3 750	3 350	3 150	1 180	2 360
	18 000	3 750	4 000	4 000	3 550	3 350	3 150	3 150	3 350	3 000	3 000	3 150	3 550	4 000	4 250	4 000	3 350	1 600	2 500
5 600 000	25 000	3 550	3 350	3 000	2 650	2 500	2 650	2 650	3 000	2 500	2 360	2 650	3 350	3 750	3 350	3 000	2 800	1 000	2 120
	18 000	3 550	3 750	3 550	3 350	3 150	3 000	3 000	3 150	2 800	2 650	2 800	3 350	3 750	4 000	3 550	3 150	1 400	2 240
max		8 000																2 500	5 000

Size **180**

280 000	71 000	10 000	10 000	10 000	10 000	10 000	9 500	9 000	10 000	9 000	8 500	9 000	10 000	10 000	10 000	10 000	10 000	3 150	6 300
	50 000	10 000	10 000	10 000	10 000	10 000	10 000	9 500	10 000	9 500	9 000	9 500	10 000	10 000	10 000	10 000	10 000	3 150	6 300
355 000	71 000	10 000	10 000	10 000	9 500	9 000	8 500	8 500	9 500	8 000	7 500	8 000	10 000	10 000	10 000	10 000	10 000	3 150	6 300
	50 000	10 000	10 000	10 000	10 000	10 000	9 000	8 500	9 500	9 000	8 000	9 000	10 000	10 000	10 000	10 000	10 000	3 150	6 300
450 000	71 000	10 000	10 000	10 000	9 000	8 000	8 000	8 000	8 500	7 500	7 100	7 500	9 500	10 000	10 000	10 000	9 000	3 150	6 300
	50 000	10 000	10 000	10 000	10 000	9 000	8 500	8 500	9 000	8 500	8 000	8 500	9 500	10 000	10 000	10 000	9 500	3 150	6 300
560 000	71 000	9 500	10 000	9 000	8 000	7 100	7 100	7 100	8 000	6 700	6 300	7 100	8 500	10 000	10 000	9 000	8 000	2 650	5 600
	50 000	9 500	10 000	10 000	9 500	8 500	8 000	7 500	8 500	7 500	7 100	7 500	9 000	10 000	10 000	10 000	9 000	3 150	6 000
710 000	71 000	9 000	9 000	8 000	6 700	6 300	6 300	6 300	7 500	6 300	5 600	6 300	8 000	9 500	9 000	8 000	6 700	2 240	5 300
	50 000	9 000	9 500	9 500	8 500	8 000	7 100	7 100	7 500	7 100	6 300	7 100	8 500	10 000	10 000	9 500	8 000	3 150	5 600
	35 500	9 000	9 500	9 500	9 000	8 000	7 500	7 500	8 000	7 500	7 100	7 500	8 500	9 500	10 000	9 500	8 500	3 150	5 600
900 000	71 000	8 500	8 000	6 700	6 000	5 300	5 600	6 000	6 700	5 600	5 000	5 600	7 500	9 000	8 000	7 100	6 000	1 900	4 750
	50 000	8 500	9 000	8 500	7 500	7 500	6 700	6 300	7 100	6 300	6 000	6 300	7 500	9 500	9 500	8 500	7 500	3 000	5 000
	35 500	8 500	9 000	9 000	8 500	7 500	7 100	7 100	7 500	6 700	6 300	7 100	8 000	9 000	9 500	9 000	8 000	3 150	5 300
1 120 000	50 000	7 500	8 500	8 000	7 100	6 700	6 000	6 000	6 700	6 000	5 300	6 000	7 100	9 000	8 500	8 000	7 100	2 650	4 750
	35 500	7 500	8 500	8 500	8 000	7 100	6 300	6 300	7 100	6 300	6 000	6 300	7 500	8 500	9 000	8 500	7 100	3 150	5 000
1 400 000	50 000	7 100	7 500	7 100	6 300	5 600	5 600	5 600	6 000	5 300	4 750	5 300	6 700	8 500	8 000	7 100	6 300	2 240	4 250
	35 500	7 100	8 000	8 000	7 500	6 300	6 000	6 000	6 300	5 600	5 300	6 000	6 700	8 000	8 500	8 000	6 700	3 000	4 500
1 800 000	50 000	6 700	7 100	6 300	5 600	5 000	5 000	5 000	5 600	4 750	4 500	5 000	6 300	8 000	7 100	6 300	5 600	1 900	4 000
	35 500	6 700	7 500	7 100	6 700	6 000	5 600	5 600	6 000	5 300	5 000	5 300	6 300	7 500	8 000	7 500	6 300	2 650	4 250
2 240 000	35 500	6 300	7 100	6 700	6 000	5 600	5 000	5 000	5 600	5 000	4 500	5 000	6 000	7 100	7 500	6 700	6 000	2 360	3 750
	25 000	6 300	6 700	6 700	6 300	5 600	5 300	5 300	5 600	5 300	5 000	5 300	6 000	6 700	7 100	6 700	6 000	3 000	4 000
2 800 000	35 500	6 000	6 300	6 000	5 600	5 300	4 750	4 500	5 000	4 500	4 250	4 500	5 600	6 700	6 700	6 000	5 300	2 120	3 550
	25 000	6 000	6 300	6 300	6 000	5 300	5 000	5 000	5 300	4 750	4 500	4 750	5 600	6 300	6 700	6 300	5 600	2 650	3 750
3 550 000	35 500	5 300	6 000	5 300	5 000	4 500	4 250	4 250	4 750	4 000	3 750	4 000	5 000	6 300	6 000	5 600	5 000	1 800	3 350
	25 000	5 300	6 000	6 000	5 600	5 000	4 500	4 500	4 750	4 500	4 250	4 500	5 300	6 000	6 300	6 000	5 000	2 360	3 350
4 500 000	35 500	5 000	5 600	5 000	4 500	4 000	3 750	3 750	4 250	3 750	3 350	3 750	4 750	6 000	5 600	5 000	4 500	1 600	3 150
	25 000	5 000	5 600	5 600	5 300	4 750	4 250	4 250	4 500	4 000	3 750	4 250	4 750	5 600	6 000	5 600	4 750	2 120	3 150
5 600 000	35 500	4 750	5 000	4 500	3 750	3 550	3 550	3 550	4 000	3 350	3 150	3 350	4 500	5 600	5 000	4 500	4 000	1 320	2 800
	25 000	4 750	5 300	5 000	4 750	4 250	3 750	3 750	4 250	3 750	3 550	3 750	4 500	5 300	5 600	5 300	4 500	1 900	3 000
max		10 000 (5 600 for «short side»)																3 150	6 300

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **groove side** •

Size **160**

$n_2 \cdot L_h$ rpm · h	T_2 lb in																	$F_{a2}^{(1)}$	
		0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
280 000	50 000	7 500	8 000	8 000	8 000	8 000	5 600	5 000	5 600	5 300	4 250	4 750	6 300	8 000	8 000	8 000	8 000	2 500	5 000
	35 500	8 000	8 000	8 000	8 000	8 000	6 300	6 000	6 300	6 300	5 300	5 600	7 100	8 000	8 000	8 000	8 000	2 500	5 000
355 000	50 000	6 700	8 000	8 000	8 000	7 100	5 000	4 500	4 750	4 750	3 750	4 000	6 000	8 000	8 000	8 000	7 500	2 500	5 000
	35 500	7 100	8 000	8 000	8 000	7 500	6 000	5 300	5 600	5 600	4 750	5 300	6 700	8 000	8 000	8 000	7 500	2 500	5 000
450 000	50 000	6 300	8 000	8 000	8 000	6 700	4 500	3 750	4 250	4 000	3 150	3 550	5 300	8 000	8 000	8 000	6 700	2 360	4 750
	35 500	6 700	8 000	8 000	8 000	7 100	5 300	4 750	5 300	5 300	4 500	4 750	6 000	8 000	8 000	8 000	7 100	2 500	4 750
560 000	50 000	5 600	8 000	8 000	7 500	6 000	4 000	3 350	3 750	3 550	2 800	3 000	4 750	8 000	8 000	8 000	6 300	2 000	4 250
	35 500	6 300	8 000	8 000	8 000	6 300	5 000	4 250	4 750	4 750	3 750	4 250	5 600	8 000	8 000	8 000	6 700	2 500	4 500
710 000	50 000	5 000	7 500	8 000	7 100	5 000	3 550	3 000	3 350	3 000	2 240	2 500	4 000	7 500	8 000	8 000	5 600	1 700	4 000
	35 500	5 600	7 500	8 000	7 500	6 000	4 500	3 750	4 250	4 250	3 350	3 550	5 000	7 500	8 000	8 000	6 300	2 500	4 250
	25 000	6 000	7 100	8 000	7 500	6 300	5 000	4 500	5 000	5 000	4 250	4 500	5 600	7 100	8 000	8 000	6 300	2 500	4 250
900 000	50 000	4 500	7 100	7 500	6 300	4 500	3 150	2 500	3 000	2 500	1 900	2 120	3 550	7 100	8 000	7 100	5 000	1 320	3 550
	35 500	5 300	7 100	8 000	7 100	5 600	4 000	3 550	3 750	3 750	3 000	3 350	4 500	7 100	8 000	8 000	5 600	2 240	3 750
	25 000	5 600	6 700	7 500	7 100	5 600	4 500	4 250	4 500	4 500	3 750	4 000	5 000	6 700	8 000	7 500	6 000	2 500	4 000
1 120 000	35 500	4 750	6 700	7 100	6 300	5 000	3 550	3 150	3 350	3 350	2 650	3 000	4 250	6 300	8 000	7 100	5 300	1 900	3 550
	25 000	5 000	6 300	7 100	6 700	5 300	4 250	3 750	4 000	4 000	3 350	3 550	4 750	6 300	7 500	7 100	5 600	2 500	3 750
1 400 000	35 500	4 250	6 300	6 700	6 000	4 750	3 150	2 650	3 150	3 000	2 240	2 500	3 550	6 000	7 500	6 700	4 750	1 700	3 350
	25 000	4 750	6 000	6 700	6 300	5 000	3 750	3 350	3 550	3 550	3 150	3 350	4 250	6 000	7 100	6 700	5 000	2 240	3 350
1 800 000	35 500	4 000	6 000	6 300	5 300	4 250	2 800	2 360	2 650	2 500	1 900	2 120	3 350	5 600	7 100	6 000	4 500	1 400	3 150
	25 000	4 250	5 600	6 300	6 000	4 500	3 550	3 150	3 350	3 350	2 800	3 000	4 000	5 600	6 700	6 300	4 750	2 000	3 150
2 240 000	25 000	4 000	5 300	6 000	5 300	4 250	3 150	2 800	3 150	3 000	2 500	2 650	3 550	5 300	6 300	6 000	4 250	1 800	3 000
	18 000	4 250	5 000	5 600	5 300	4 250	3 550	3 150	3 350	3 350	3 000	3 150	4 000	5 000	6 000	5 600	4 500	2 240	3 150
2 800 000	25 000	3 550	5 000	5 600	5 000	3 750	2 800	2 500	2 800	2 650	2 120	2 360	3 150	5 000	6 000	5 600	4 000	1 600	2 800
	18 000	3 750	4 750	5 300	5 000	4 000	3 150	3 000	3 150	3 150	2 650	2 800	3 550	4 750	5 600	5 300	4 250	2 000	2 800
3 550 000	25 000	3 350	4 750	5 000	4 500	3 550	2 500	2 240	2 500	2 360	1 900	2 000	3 000	4 500	5 600	5 000	3 550	1 320	2 500
	18 000	3 550	4 500	5 000	4 750	3 750	3 000	2 650	2 800	2 800	2 360	2 650	3 350	4 500	5 300	5 000	3 750	1 800	2 650
4 500 000	25 000	3 150	4 500	4 750	4 250	3 350	2 240	1 900	2 240	2 120	1 600	1 800	2 650	4 250	5 300	4 750	3 350	1 180	2 360
	18 000	3 350	4 250	4 750	4 500	3 350	2 650	2 360	2 650	2 650	2 240	2 360	3 000	4 250	5 000	4 750	3 550	1 600	2 500
5 600 000	25 000	2 800	4 250	4 500	3 750	3 000	2 000	1 700	1 900	1 800	1 320	1 500	2 360	4 000	4 750	4 250	3 150	1 000	2 120
	18 000	3 150	4 000	4 500	4 250	3 150	2 500	2 120	2 360	2 360	1 900	2 000	2 800	4 000	4 750	4 500	3 350	1 400	2 240
max		8 000																2 500	5 000


Size **180**

280 000	71 000	10 000	10 000	10 000	10 000	10 000	8 000	7 100	7 500	7 500	6 000	6 700	9 000	10 000	10 000	10 000	10 000	3 150	6 300
	50 000	10 000	10 000	10 000	10 000	10 000	9 000	8 500	9 000	9 000	7 500	8 000	10 000	10 000	10 000	10 000	10 000	3 150	6 300
355 000	71 000	9 500	10 000	10 000	10 000	9 500	7 100	6 300	7 100	6 700	5 300	5 600	8 500	10 000	10 000	10 000	10 000	3 150	6 300
	50 000	10 000	10 000	10 000	10 000	10 000	8 500	7 500	8 000	8 000	6 700	7 100	9 000	10 000	10 000	10 000	10 000	3 150	6 300
450 000	71 000	8 500	10 000	10 000	10 000	9 000	6 300	5 600	6 300	6 000	4 750	5 000	7 500	10 000	10 000	10 000	9 000	3 150	6 300
	50 000	9 000	10 000	10 000	10 000	9 500	7 500	6 700	7 500	7 100	6 300	6 700	8 500	10 000	10 000	10 000	9 500	3 150	6 300
560 000	71 000	8 000	10 000	10 000	10 000	8 500	5 600	4 750	5 600	5 000	4 000	4 500	6 700	10 000	10 000	10 000	8 500	2 650	5 600
	50 000	8 500	10 000	10 000	10 000	9 000	6 700	6 300	6 700	6 300	5 600	6 000	7 500	10 000	10 000	10 000	9 000	3 150	6 000
710 000	71 000	7 100	10 000	10 000	9 500	7 100	5 000	4 250	4 750	4 500	3 350	3 750	6 000	10 000	10 000	10 000	7 500	2 240	5 300
	50 000	8 000	10 000	10 000	10 000	8 000	6 300	5 600	6 000	6 000	4 750	5 300	7 100	10 000	10 000	10 000	8 500	3 150	5 600
	35 500	8 000	9 500	10 000	10 000	8 500	7 100	6 300	6 700	6 700	6 000	6 300	7 500	9 500	10 000	10 000	8 500	3 150	5 600
900 000	71 000	6 300	9 500	10 000	8 500	6 300	4 500	3 550	4 250	3 750	2 800	3 150	5 300	9 500	10 000	10 000	7 100	1 900	4 750
	50 000	7 100	9 500	10 000	9 500	7 500	5 600	5 000	5 600	5 300	4 250	4 750	6 300	9 500	10 000	10 000	7 500	3 000	5 000
	35 500	7 500	9 000	10 000	9 500	8 000	6 300	6 000	6 300	6 300	5 300	5 600	7 100	9 000	10 000	10 000	8 000	3 150	5 300
1 120 000	50 000	6 700	9 000	10 000	9 000	7 100	5 000	4 500	5 000	4 750	3 750	4 250	6 000	9 000	10 000	10 000	7 100	2 650	4 750
	35 500	7 100	8 500	9 500	9 000	7 100	6 000	5 300	5 600	5 600	4 750	5 300	6 300	8 500	10 000	9 500	7 500	3 150	5 000
1 400 000	50 000	6 000	8 500	9 000	8 000	6 300	4 500	3 750	4 500	4 000	3 350	3 550	5 300	8 500	10 000	9 000	6 300	2 240	4 250
	35 500	6 300	8 000	9 000	8 500	6 700	5 300	4 750	5 300	5 000	4 250	4 500	6 000	8 000	9 500	9 000	6 700	3 000	4 500
1 800 000	50 000	5 600	8 000	8 500	7 500	6 000	4 000	3 350	3 750	3 550	2 800	3 150	4 750	8 000	9 500	8 500	6 000	1 900	4 000
	35 500	6 000	7 500	8 500	8 000	6 300	4 750	4 250	4 750	4 500	3 750	4 250	5 600	7 500	9 000	8 500	6 300	2 650	4 250
2 240 000	35 500	5 600	7 100	8 000	7 500	5 600	4 500	3 750	4 250	4 250	3 350	3 750	5 000	7 100	8 500	8 000	6 000	2 360	3 750
	25 000	5 600	7 100	7 500	7 100	6 000	5 000	4 500	4 750	4 750	4 250	4 500	5 300	7 100	8 000	7 500	6 000	3 000	4 000
2 800 000	35 500	5 000	6 700	7 500	6 700	5 300	4 000	3 550	3 750	3 750	3 150	3 350	4 500	6 700	8 000	7 500	5 600	2 120	3 550
	25 000	5 300	6 300	7 100	6 700	5 600	4 500	4 000	4 500	4 500	3 750	4 000	5 000	6 300	7 500	7 100	5 600	2 650	3 750
3 550 000	35 500	4 750	6 300	7 100	6 300	5 000	3 550	3 150	3 350	3 350	2 650	3 000	4 000	6 300	7 500	7 100	5 000	1 800	3 350
	25 000	5 000	6 300	6 700	6 300	5 000	4 000	3 750	4 000	4 000	3 350	3 550	4 500	6 000	7 100	6 700	5 300	2 360	3 350
4 500 000	35 500	4 250	6 000	6 300	5 600	4 500	3 150	2 800	3 150	3 000	2 360	2 500	3 750	6 000	7 100	6 300	4 750	1 600	3 150
	25 000	4 500	5 600	6 300	6 000	4 750	3 750	3 350	3 550	3 550	3 150	3 350	4 250	5 600	6 700	6 300	4 750	2 120	3 150
5 600 000	35 500	3 750	5 600	6 000	5 300	4 000	2 800	2 500	2 800	2 500	2 000	2 240	3 350	5 600	6 700	6 000	4 250	1 320	2 800
	25 000	4 250	5 300	6 000	5 600	4 500	3 350	3 150	3 350	3 350	2 800	3 000	3 750	5 300	6 300	6 000	4 500	1 900	3 000
max		10 000 (5 600 for «short side»)																3 150	6 300

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **opposite side to groove**

Size **200**

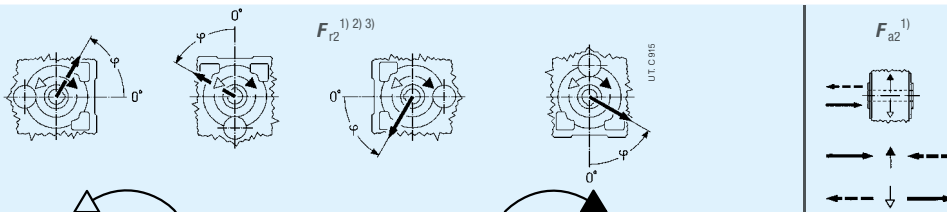$n_2 \cdot L_h$	T_2																	$F_{a2}^{1)}$	
rpm · h	lb in	0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
280 000	100 000	10 600	12 500	12 500	12 500	12 500	12 500	11 200	10 000	12 500	12 500	11 200	11 200	11 200	11 800	12 500	12 500	8 000	4 000
	71 000	11 800	12 500	12 500	12 500	12 500	12 500	11 800	11 200	12 500	12 500	11 800	11 800	12 500	12 500	12 500	12 500	8 000	4 000
355 000	100 000	10 000	11 200	12 500	12 500	12 500	12 500	10 000	9 000	12 500	11 800	10 600	10 600	10 000	10 600	12 500	12 500	8 000	3 750
	71 000	10 600	12 500	12 500	12 500	12 500	12 500	11 200	10 000	12 500	11 800	11 200	11 200	11 800	12 500	12 500	12 500	8 000	4 000
450 000	100 000	9 000	9 500	11 200	12 500	12 500	11 800	9 500	8 500	12 500	10 600	9 500	9 500	9 000	9 500	11 200	12 500	7 500	3 150
	71 000	10 000	11 200	12 500	12 500	12 500	11 800	9 500	8 500	12 500	11 200	10 000	10 000	11 200	11 800	12 500	12 500	7 500	4 000
560 000	100 000	8 000	8 500	9 500	11 200	12 500	10 600	8 500	7 500	11 800	10 000	9 000	8 000	7 500	8 500	9 500	11 200	7 100	2 650
	71 000	9 000	10 600	11 800	12 500	12 500	11 200	9 500	8 500	11 800	10 000	9 500	9 500	10 000	10 600	11 800	12 500	7 100	4 000
710 000	100 000	7 500	7 100	8 500	10 000	11 200	10 000	7 500	6 700	10 600	9 000	8 000	6 700	6 300	7 100	8 500	10 000	6 300	2 120
	71 000	8 500	10 000	10 600	11 800	11 800	10 000	8 500	8 000	11 200	9 500	8 500	8 500	9 000	9 500	10 600	11 800	6 700	3 550
900 000	100 000	6 000	6 000	7 100	9 000	10 000	9 500	7 100	6 300	9 500	8 500	7 500	5 600	5 300	6 000	7 500	9 000	6 000	1 700
	71 000	7 500	9 000	9 500	10 600	11 200	9 500	8 000	7 100	10 000	9 000	8 000	8 000	8 000	8 500	9 500	10 600	6 300	3 150
1 120 000	100 000	8 500	9 500	10 600	11 200	11 200	9 500	8 500	8 000	10 000	9 000	8 500	8 500	9 000	10 000	10 600	10 600	6 300	4 000
	50 000	7 100	8 000	8 500	10 000	10 600	9 000	7 100	6 700	9 500	8 500	7 500	7 500	7 100	7 500	8 500	9 500	5 600	2 650
1 400 000	100 000	6 300	6 700	7 500	9 000	9 500	8 500	6 700	6 000	9 000	7 500	6 700	6 700	6 300	6 700	7 500	8 500	5 300	2 240
	50 000	7 100	8 000	9 500	10 000	9 500	8 500	7 100	6 700	9 000	7 500	7 100	7 100	8 000	8 500	9 000	9 500	5 300	3 350
1 800 000	100 000	6 000	6 000	6 700	8 000	9 000	7 500	6 000	5 300	8 500	7 100	6 300	5 600	5 300	6 000	7 100	8 000	5 000	1 900
	50 000	6 300	7 500	8 500	9 500	9 000	8 000	6 700	6 300	8 500	7 500	6 700	6 700	7 500	7 500	8 500	9 000	5 000	3 000
2 240 000	100 000	6 000	7 100	7 500	8 500	8 500	7 500	6 000	5 600	8 000	6 700	6 300	6 300	6 300	6 700	7 500	8 500	4 750	2 650
	50 000	6 300	7 100	8 000	8 500	8 500	7 500	6 000	6 000	7 500	7 100	6 700	6 300	7 100	7 500	8 500	8 500	4 750	3 150
2 800 000	100 000	5 300	6 300	7 100	7 500	8 000	6 700	5 600	5 000	7 100	6 300	5 600	5 600	5 600	6 000	6 700	7 500	4 250	2 240
	50 000	6 000	6 700	7 500	8 000	8 000	6 700	6 000	5 600	7 100	6 300	6 000	6 000	6 300	7 100	7 500	7 500	4 500	3 000
3 550 000	100 000	5 000	5 600	6 300	7 100	7 500	6 300	5 000	4 750	6 700	6 000	5 300	5 300	5 000	5 300	6 300	6 700	4 000	1 900
	50 000	5 300	6 300	7 100	7 500	7 500	6 300	5 600	5 000	6 700	6 000	5 600	5 600	6 000	6 300	7 100	7 100	4 000	2 650
4 500 000	100 000	4 500	5 000	5 600	6 300	7 100	6 000	4 750	4 250	6 300	5 300	4 750	4 750	4 500	4 750	5 600	6 300	3 750	1 600
	50 000	5 000	5 600	6 700	7 100	7 100	6 000	5 000	4 750	6 300	5 600	5 300	5 300	5 000	5 600	6 300	6 700	3 750	2 360
5 600 000	100 000	4 000	4 250	4 750	5 600	6 300	5 300	4 250	3 750	6 000	5 000	4 500	4 000	3 750	4 250	5 000	5 600	3 350	1 320
	50 000	4 500	5 300	6 000	6 700	6 300	5 600	4 750	4 250	6 000	5 300	4 750	4 750	5 000	5 300	6 000	6 300	3 550	2 000
max		12 500																8 000	4 000

Values valid for metric «Solid low speed shaft»⁴⁾ (see ch.17 (2)).

Size **225**

280 000	140 000	15 000	16 000	16 000	16 000	16 000	16 000	16 000	14 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	10 000	5 000	
	100 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	10 000	5 000	
355 000	140 000	14 000	16 000	16 000	16 000	16 000	16 000	16 000	14 000	12 500	16 000	16 000	15 000	15 000	15 000	16 000	16 000	16 000	10 000	5 000
	100 000	15 000	16 000	16 000	16 000	16 000	16 000	16 000	15 000	14 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	16 000	10 000	5 000
450 000	140 000	12 500	15 000	16 000	16 000	16 000	16 000	16 000	13 200	11 800	16 000	15 000	13 200	13 200	13 200	14 000	16 000	16 000	9 500	4 500
	100 000	14 000	16 000	16 000	16 000	16 000	16 000	16 000	14 000	13 200	16 000	16 000	14 000	14 000	16 000	16 000	16 000	16 000	10 000	5 000
560 000	140 000	11 800	12 500	14 000	16 000	16 000	16 000	15 000	11 800	10 600	16 000	14 000	12 500	11 800	11 200	12 500	14 000	16 000	9 000	3 750
	100 000	12 500	15 000	16 000	16 000	16 000	16 000	15 000	13 200	11 800	16 000	14 000	13 200	13 200	14 000	16 000	16 000	16 000	9 500	5 000
710 000	140 000	10 600	11 200	12 500	15 000	16 000	14 000	10 600	9 500	15 000	12 500	11 200	10 000	9 500	10 600	13 200	14 000	8 500	3 000	
	100 000	11 800	14 000	16 000	16 000	16 000	14 000	11 800	11 200	15 000	13 200	12 500	12 500	13 200	14 000	15 000	16 000	8 500	4 750	
	71 000	12 500	14 000	16 000	16 000	16 000	14 000	12 500	11 800	15 000	13 200	12 500	12 500	14 000	15 000	16 000	16 000	9 000	5 000	
900 000	140 000	9 500	9 500	11 200	13 200	15 000	12 500	10 000	9 000	14 000	11 800	10 000	8 500	8 500	9 500	11 200	13 200	8 000	2 500	
	100 000	10 600	12 500	14 000	16 000	16 000	13 200	11 200	10 000	14 000	12 500	11 200	11 200	11 800	12 500	14 000	16 000	8 000	4 250	
	71 000	11 800	13 200	15 000	16 000	15 000	13 200	11 800	11 200	14 000	12 500	11 800	11 800	12 500	14 000	15 000	15 000	8 500	5 000	
1 120 000	100 000	10 000	11 800	12 500	14 000	15 000	12 500	10 000	9 000	13 200	11 200	10 600	10 600	10 600	11 200	12 500	14 000	7 500	3 550	
	71 000	10 600	12 500	14 000	15 000	14 000	12 500	11 200	10 000	13 200	11 800	11 200	11 200	11 800	13 200	14 000	14 000	7 500	5 000	
1 400 000	100 000	9 000	10 000	11 200	12 500	14 000	11 200	9 000	8 500	12 500	10 600	9 500	9 500	9 000	10 000	11 200	12 500	7 100	3 150	
	71 000	10 000	11 200	13 200	14 000	13 200	11 800	10 000	9 500	12 500	11 200	10 000	10 000	11 200	11 800	13 200	13 200	7 500	4 500	
1 800 000	100 000	8 500	9 000	10 000	11 800	12 500	10 600	8 500	7 500	11 800	10 000	9 000	8 500	8 000	9 000	10 000	11 200	6 300	2 650	
	71 000	9 000	10 600	12 500	13 200	12 500	11 200	9 500	8 500	11 800	10 000	9 500	9 500	10 000	11 200	11 800	12 500	6 700	3 750	
2 240 000	100 000	8 500	10 000	11 200	12 500	11 800	10 000	8 500	8 000	10 600	9 500	8 500	8 500	9 500	10 000	11 200	11 800	6 300	3 350	
	50 000	9 000	10 000	11 200	11 800	11 800	10 000	9 000	8 500	10 600	9 500	9 000	9 000	9 500	10 600	11 200	11 200	6 300	4 500	
2 800 000	100 000	7 500	9 000	10 000	11 200	11 200	9 500	8 000	7 100	10 000	9 000	8 000	8 000	8 500	9 000	10 000	11 200	5 600	3 000	
	50 000	8 500	9 500	10 600	11 200	10 600	9 500	8 500	8 000	10 000	9 000	8 500	8 500	9 000	10 000	10 600	10 600	6 000	3 750	
3 550 000	100 000	7 100	8 500	9 000	10 000	10 600	9 000	7 100	6 300	9 500	8 000	7 500	7 500	7 500	8 000	9 000	10 000	5 300	2 500	
	50 000	7 500	8 500	10 000	10 600	10 000	9 000	7 500	7 100	9 500	8 500	8 000	8 000	8 500	9 500	10 000	10 000	5 300	3 550	
4 500 000	100 000	6 300	7 500	8 000	9 500	10 000	8 500	6 700	6 000	9 000	7 500	6 700	6 700	6 300	7 100	8 000	9 000	5 000	2 240	
	50 000	7 100	8 500	9 500	10 000	9 500	8 500	7 100	6 700	9 000	8 000	7 100	7 100	8 000	8 500	9 500	9 500	5 000	3 150	
5 600 000	100 000	6 000	6 300	7 100	8 500	9 000	7 500	6 000	5 300	8 500	7 100	6 300	6 000	5 600	6 300	7 100	8 000	4 500	1 800	
	50 000	6 300	7 500	9 000	9 500	9 000	7 500	6 700	6 000	8 000	7 100	6 700	6 700	6 700	7 100	8 000	8 500	4 750	2 800	
max		16 000 (9 000 for «short side»)																10 000	5 000	

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **groove side** •

Size **200**

$n_2 \cdot L_h$	T_2																			
		rpm · h	lb in	0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°	
280 000	100 000	8 500	12 500	12 500	12 500	12 500	11 200	7 500	7 100	12 500	9 000	8 500	9 500	12 500	12 500	12 500	12 500	12 500	8 000	4 000
	71 000	10 600	12 500	12 500	12 500	12 500	11 800	9 500	9 000	12 500	10 600	10 000	10 600	12 500	12 500	12 500	12 500	12 500	8 000	4 000
355 000	100 000	7 500	11 800	12 500	12 500	12 500	10 000	6 700	6 300	11 200	8 500	7 500	8 500	11 800	12 500	12 500	12 500	8 000	3 750	
	71 000	9 500	12 500	12 500	12 500	12 500	11 200	8 500	8 000	11 800	9 500	9 000	10 000	12 500	12 500	12 500	12 500	8 000	4 000	
450 000	100 000	6 700	11 200	12 500	12 500	12 500	9 000	6 000	5 300	10 600	7 500	6 700	7 500	10 000	12 500	12 500	12 500	7 500	3 150	
	71 000	8 500	11 800	12 500	12 500	12 500	10 000	8 000	7 100	11 200	9 000	8 000	9 000	11 200	12 500	12 500	12 500	7 500	4 000	
560 000	100 000	6 000	10 000	12 500	12 500	12 500	8 000	5 000	4 500	9 500	6 700	5 600	6 700	9 000	11 800	12 500	12 500	7 100	2 650	
	71 000	7 500	10 600	12 500	12 500	12 500	9 500	7 100	6 300	10 000	8 000	7 100	8 000	10 600	12 500	12 500	12 500	7 100	4 000	
710 000	100 000	5 000	9 000	12 500	12 500	12 500	7 100	4 250	3 750	8 500	5 600	5 000	6 000	7 500	10 600	12 500	12 500	6 300	2 120	
	71 000	6 700	10 000	12 500	12 500	12 500	8 500	6 300	5 600	9 500	7 100	6 300	7 500	9 500	12 500	12 500	12 500	6 700	3 550	
	50 000	8 000	10 600	12 500	12 500	11 800	9 500	7 500	7 100	10 000	8 500	7 500	8 500	10 000	12 500	12 500	11 800	6 700	4 000	
900 000	100 000	4 250	7 500	11 200	12 500	11 800	6 000	3 550	3 150	8 000	5 000	4 250	5 300	6 300	9 500	11 800	11 200	6 000	1 700	
	71 000	6 300	9 500	12 500	12 500	11 800	8 000	5 600	5 000	9 000	6 700	6 000	6 700	9 000	11 200	12 500	11 800	6 300	3 150	
	50 000	7 500	9 500	12 500	12 500	11 200	8 500	6 700	6 300	9 000	7 500	7 100	7 500	9 500	11 200	12 500	11 200	6 300	4 000	
1 120 000	100 000	5 600	8 500	11 800	12 500	11 200	7 100	4 750	4 500	8 000	6 000	5 300	6 000	8 500	10 000	11 800	11 200	5 600	2 650	
	50 000	6 700	9 000	11 800	12 500	10 600	8 000	6 300	6 000	8 500	7 100	6 300	7 100	9 000	10 600	11 800	10 600	6 000	3 750	
1 400 000	100 000	4 750	8 000	10 600	11 800	10 000	6 300	4 000	3 750	7 500	5 300	4 500	5 300	7 100	9 500	10 600	10 600	5 300	2 240	
	50 000	6 000	8 500	10 600	11 800	10 000	7 100	5 600	5 000	8 000	6 300	5 600	6 300	8 000	10 000	11 200	10 000	5 300	3 350	
1 800 000	100 000	4 000	7 100	9 500	11 200	9 500	5 600	3 550	3 150	6 700	4 750	4 000	4 750	6 300	8 500	10 000	9 500	5 000	1 900	
	50 000	5 600	7 500	10 000	11 200	9 500	6 700	5 000	4 500	7 500	5 600	5 300	6 000	7 500	9 500	10 600	9 500	5 000	3 000	
2 240 000	100 000	5 000	7 100	9 500	10 600	9 000	6 000	4 500	4 000	6 700	5 300	4 750	5 300	7 100	8 500	9 500	9 000	4 750	2 650	
	35 500	5 600	7 500	9 000	9 500	8 500	6 700	5 300	5 000	7 100	6 000	5 300	6 000	7 100	8 500	9 500	8 500	4 750	3 150	
2 800 000	100 000	4 500	6 700	9 000	10 000	8 500	5 600	3 750	3 550	6 300	4 750	4 250	4 750	6 300	8 000	9 000	8 500	4 250	2 240	
	35 500	5 300	6 700	8 500	9 000	8 000	6 000	4 750	4 500	6 300	5 300	5 000	5 300	6 700	8 000	9 000	8 000	4 500	3 000	
3 550 000	100 000	3 750	6 000	8 500	9 000	8 000	5 000	3 350	3 150	5 600	4 250	3 550	4 250	6 000	7 100	8 500	8 000	4 000	1 900	
	35 500	4 750	6 300	8 500	9 000	7 500	5 600	4 250	4 000	6 000	4 750	4 500	5 000	6 300	7 500	8 500	7 500	4 000	2 650	
4 500 000	100 000	3 350	5 600	7 500	8 500	7 100	4 500	3 000	2 650	5 300	3 750	3 350	3 750	5 300	6 700	7 500	7 500	3 750	1 600	
	35 500	4 250	6 000	8 000	8 500	7 100	5 000	3 750	3 550	5 600	4 500	4 000	4 500	5 600	7 100	8 000	7 100	3 750	2 360	
5 600 000	100 000	3 000	5 000	6 700	8 000	6 700	4 000	2 500	2 240	4 750	3 350	2 800	3 350	4 500	6 000	7 100	6 700	3 350	1 320	
	35 500	3 750	5 300	7 500	8 000	6 700	4 750	3 350	3 150	5 300	4 000	3 550	4 000	5 300	6 700	7 500	6 700	3 550	2 000	
max		12 500																8 000	4 000	

Values valid for metric «Solid low speed shaft»⁴⁾ (see ch.17 (2)).


Size **225**

280 000	140 000	12 500	16 000	16 000	16 000	16 000	16 000	11 800	10 600	16 000	13 200	12 500	14 000	16 000	16 000	16 000	16 000	10 000	5 000
	100 000	15 000	16 000	16 000	16 000	16 000	16 000	14 000	13 200	16 000	15 000	14 000	15 000	16 000	16 000	16 000	16 000	10 000	5 000
355 000	140 000	11 200	16 000	16 000	16 000	16 000	14 000	10 000	9 500	16 000	12 500	11 200	12 500	16 000	16 000	16 000	16 000	10 000	5 000
	100 000	13 200	16 000	16 000	16 000	16 000	16 000	12 500	11 800	16 000	14 000	12 500	14 000	16 000	16 000	16 000	16 000	10 000	5 000
450 000	140 000	10 000	16 000	16 000	16 000	16 000	13 200	9 000	8 500	15 000	11 200	10 000	11 200	15 000	16 000	16 000	16 000	9 500	4 500
	100 000	12 500	16 000	16 000	16 000	16 000	15 000	11 200	10 600	16 000	12 500	11 800	12 500	16 000	16 000	16 000	16 000	10 000	5 000
560 000	140 000	9 000	14 000	16 000	16 000	16 000	11 800	8 000	7 100	14 000	10 000	9 000	10 000	13 200	16 000	16 000	16 000	9 000	3 750
	100 000	11 200	15 000	16 000	16 000	16 000	13 200	10 000	9 500	15 000	11 800	10 600	11 800	15 000	16 000	16 000	16 000	9 500	5 000
710 000	140 000	8 000	12 500	16 000	16 000	16 000	10 600	6 700	6 000	12 500	9 000	7 500	9 000	11 200	15 000	16 000	16 000	8 500	3 000
	100 000	10 000	14 000	16 000	16 000	16 000	12 500	9 000	8 500	13 200	10 600	9 500	10 600	14 000	16 000	16 000	16 000	8 500	4 750
	71 000	11 200	14 000	16 000	16 000	16 000	13 200	10 600	10 000	14 000	11 800	11 200	11 800	14 000	16 000	16 000	16 000	9 000	5 000
900 000	140 000	6 700	11 200	16 000	16 000	16 000	9 500	6 000	5 300	11 800	8 000	6 700	8 000	10 000	13 200	16 000	16 000	8 000	2 500
	100 000	9 000	13 200	16 000	16 000	16 000	11 200	8 500	7 500	12 500	9 500	9 000	9 500	12 500	16 000	16 000	16 000	8 000	4 250
	71 000	10 600	13 200	16 000	16 000	16 000	12 500	10 000	9 500	12 500	10 600	10 000	11 200	13 200	16 000	16 000	16 000	8 500	5 000
1 120 000	100 000	8 000	11 800	16 000	16 000	15 000	10 000	7 500	6 700	11 800	9 000	8 000	9 000	11 800	14 000	16 000	16 000	7 500	3 550
	71 000	9 500	12 500	16 000	16 000	15 000	11 200	9 000	8 500	11 800	10 000	9 000	10 000	12 500	15 000	16 000	15 000	7 500	5 000
1 400 000	100 000	7 100	11 200	15 000	16 000	14 000	9 000	6 300	5 600	10 600	8 000	7 100	8 000	10 600	12 500	15 000	15 000	7 100	3 150
	71 000	8 500	11 800	15 000	16 000	14 000	10 600	8 000	7 500	11 200	9 000	8 500	9 000	11 200	14 000	15 000	14 000	7 500	4 500
1 800 000	100 000	6 300	10 000	13 200	16 000	13 200	8 500	5 600	5 000	10 000	7 100	6 300	7 100	9 000	11 800	14 000	13 200	6 300	2 650
	71 000	8 000	10 600	14 000	15 000	12 500	9 500	7 100	6 700	10 000	8 500	7 500	8 500	10 600	13 200	14 000	13 200	6 700	3 750
2 240 000	100 000	7 100	10 000	13 200	14 000	12 500	9 000	6 700	6 000	9 500	7 500	7 100	7 500	9 500	12 500	13 200	12 500	6 300	3 350
	50 000	8 500	10 000	12 500	13 200	11 800	9 500	7 500	7 500	10 000	8 500	8 000	8 500	10 000	11 800	12 500	11 800	6 300	4 500
2 800 000	71 000	6 300	9 000	12 500	14 000	11 200	8 000	6 000	5 300	9 000	6 700	6 300	7 100	9 000	11 200	12 500	11 800	5 600	3 000
	50 000	7 500	9 500	11 800	12 500	11 200	8 500	7 100	6 700	9 000	7 500	7 100	8 000	9 500	11 200	11 800	11 200	6 000	3 750
3 550 000	71 000	5 600	8 500	11 800	12 500	10 600	7 100	5 000	4 750	8 500	6 300	5 600	6 300	8 500	10 000	11 200	11 200	5 300	2 500
	50 000	6 700	9 000	11 200	11 800	10 600	8 000	6 300	6 000	8 500	7 100	6 300	7 100	8 500	10 600	11 200	10 600	5 300	3 550
4 500 000	71 000	5 000	8 000	10 600	11 800	10 000	6 700	4 500	4 000	7 500	5 600	5 000	5 600	7 500	9 500	10 600	10 600	5 000	2 240
	50 000	6 300	8 500	10 600	11 200	10 000	7 500	5 600	5 300	8 000	6 300	6 000	6 300	8 000	10 000	10 600	10 600	5 000	3 150
5 600 000	71 000	4 500	7 100	9 500	11 200	9 500	6 000	4 000	3 550	7 100	5 000	4 250	5 000	6 300	8 500	9 500	9 500	4 500	1 800
	50 000	5 600	7 500	10 000	10 600	9 000	6 700	5 000	4 750	7 500	6 000	5 300	6 000	7 500	9 500	10 000	9 500	4 750	2 800
max		16 000 (9 000 for «short side»)																10 000	5 000

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **opposite side to groove**

Size **250**

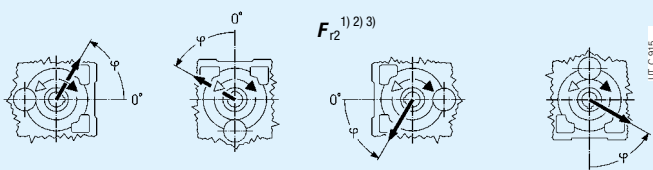$n_2 \cdot L_h$	T_2																	$F_{a2}^{1)}$	
rpm · h	lb in	0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
280 000	200 000	20 000	20 000	20 000	20 000	20 000	20 000	20 000	20 000	19 000	18 000	19 000	20 000	20 000	20 000	20 000	20 000	6 300	12 500
	140 000	20 000	20 000	20 000	20 000	20 000	20 000	20 000	20 000	20 000	19 000	20 000	20 000	20 000	20 000	20 000	20 000	6 300	12 500
355 000	200 000	20 000	20 000	20 000	20 000	19 000	18 000	18 000	20 000	17 000	16 000	18 000	20 000	20 000	20 000	20 000	20 000	6 300	12 500
	140 000	20 000	20 000	20 000	20 000	19 000	18 000	18 000	20 000	19 000	18 000	19 000	20 000	20 000	20 000	20 000	20 000	6 300	12 500
450 000	200 000	20 000	20 000	20 000	18 000	17 000	17 000	17 000	19 000	16 000	15 000	16 000	20 000	20 000	20 000	20 000	19 000	6 300	12 500
	140 000	20 000	20 000	20 000	20 000	19 000	18 000	18 000	19 000	17 000	16 000	18 000	20 000	20 000	20 000	20 000	20 000	6 300	12 500
560 000	200 000	20 000	20 000	18 000	16 000	14 000	15 000	15 000	17 000	14 000	13 200	15 000	19 000	20 000	20 000	18 000	16 000	5 600	11 800
	140 000	20 000	20 000	20 000	19 000	18 000	16 000	16 000	18 000	16 000	15 000	16 000	19 000	20 000	20 000	20 000	18 000	6 300	12 500
710 000	200 000	19 000	18 000	16 000	13 200	12 500	13 200	14 000	16 000	13 200	11 800	13 200	17 000	20 000	18 000	16 000	14 000	4 750	11 200
	140 000	19 000	20 000	19 000	17 000	16 000	15 000	15 000	17 000	14 000	14 000	15 000	18 000	20 000	20 000	19 000	17 000	6 300	11 800
900 000	200 000	18 000	16 000	14 000	11 800	10 600	11 200	12 500	15 000	11 800	11 200	12 500	16 000	18 000	17 000	14 000	11 200	3 750	10 600
	140 000	17 000	19 000	17 000	16 000	15 000	14 000	14 000	15 000	13 200	12 500	13 200	16 000	19 000	19 000	18 000	16 000	6 000	10 600
1 120 000	200 000	17 000	18 000	18 000	17 000	16 000	15 000	15 000	16 000	14 000	13 200	14 000	17 000	19 000	19 000	18 000	16 000	6 300	10 600
	140 000	16 000	17 000	16 000	14 000	13 200	12 500	12 500	14 000	11 800	11 800	12 500	15 000	18 000	18 000	16 000	14 000	5 300	10 000
1 400 000	200 000	16 000	17 000	17 000	16 000	14 000	13 200	13 200	14 000	13 200	12 500	13 200	15 000	17 000	18 000	17 000	15 000	6 300	10 000
	140 000	15 000	16 000	14 000	12 500	11 800	11 800	11 800	13 200	11 200	10 600	11 800	14 000	17 000	16 000	14 000	13 200	4 750	9 000
1 800 000	200 000	15 000	16 000	16 000	15 000	13 200	12 500	12 500	13 200	11 800	11 800	12 500	14 000	16 000	17 000	16 000	13 200	6 000	9 500
	140 000	14 000	14 000	12 500	11 200	10 600	10 600	11 200	11 800	10 000	9 500	10 600	13 200	16 000	14 000	12 500	11 800	4 000	8 500
2 240 000	200 000	14 000	15 000	15 000	13 200	12 500	11 800	11 800	12 500	11 200	10 600	11 200	13 200	15 000	16 000	15 000	12 500	5 600	9 000
	140 000	13 200	14 000	13 200	11 800	11 800	10 600	10 600	11 800	10 000	10 000	10 600	12 500	14 000	15 000	14 000	11 800	5 000	8 000
2 800 000	200 000	13 200	13 200	13 200	12 500	11 800	11 200	11 200	11 800	11 200	10 600	11 200	12 500	14 000	14 000	13 200	11 800	6 000	8 500
	140 000	11 800	13 200	11 800	11 200	10 600	10 000	10 000	10 600	9 500	9 000	9 500	11 800	13 200	13 200	12 500	11 200	4 250	7 500
3 550 000	200 000	11 800	12 500	12 500	11 800	11 200	10 600	10 600	11 200	10 000	9 500	10 600	11 800	13 200	13 200	12 500	11 200	5 300	8 000
	140 000	11 200	11 800	11 200	10 000	9 500	9 000	9 000	10 000	8 500	8 000	9 000	10 600	12 500	12 500	11 200	10 000	3 750	7 100
4 500 000	200 000	11 200	11 800	11 800	11 200	10 000	9 500	9 500	10 600	9 500	9 000	9 500	10 600	11 800	12 500	11 800	10 600	5 000	7 100
	140 000	10 600	11 200	10 000	9 000	8 500	8 500	8 500	9 500	8 000	7 500	8 000	10 000	11 800	11 200	10 000	9 500	3 350	6 700
5 600 000	200 000	10 600	11 200	11 200	10 600	9 500	9 000	9 000	9 500	8 500	8 500	9 000	10 000	11 800	11 800	11 200	10 000	4 500	6 700
	140 000	10 000	10 000	9 000	8 000	7 100	7 500	7 500	8 500	7 100	6 700	7 500	9 500	11 200	10 000	9 000	8 000	2 800	6 000
max	200 000	10 000	10 600	10 600	9 500	9 000	8 000	8 000	9 000	8 000	7 500	8 000	9 500	10 600	11 200	10 600	9 000	4 000	6 300
max		20 000																6 300	12 500

Values valid for metric «Solid low speed shaft»⁴⁾ (see ch.17 (2)).

Size **280**

Table valid for metrics «Short side» (see SW-127)																		Size 100	
280 000	280 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	23 600	25 000	25 000	25 000	25 000	25 000	25 000	8 000	16 000
	200 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	8 000	16 000
355 000	280 000	25 000	25 000	25 000	25 000	25 000	23 600	23 600	25 000	22 400	21 200	23 600	25 000	25 000	25 000	25 000	25 000	8 000	16 000
	200 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	25 000	23 600	25 000	25 000	25 000	25 000	25 000	25 000	8 000	16 000
450 000	280 000	25 000	25 000	25 000	25 000	23 600	22 400	22 400	23 600	21 200	20 000	21 200	25 000	25 000	25 000	25 000	25 000	8 000	16 000
	200 000	25 000	25 000	25 000	25 000	25 000	23 600	23 600	25 000	22 400	21 200	23 600	25 000	25 000	25 000	25 000	25 000	8 000	16 000
560 000	280 000	25 000	25 000	25 000	22 400	21 200	20 000	20 000	22 400	19 000	18 000	19 000	23 600	25 000	25 000	25 000	22 400	7 500	15 000
	200 000	25 000	25 000	25 000	25 000	23 600	21 200	21 200	23 600	21 200	20 000	21 200	25 000	25 000	25 000	25 000	23 600	8 000	15 000
710 000	280 000	25 000	25 000	22 400	20 000	18 000	19 000	18 000	20 000	18 000	16 000	18 000	22 400	25 000	25 000	22 400	20 000	6 300	13 200
	200 000	23 600	25 000	25 000	23 600	22 400	20 000	20 000	21 200	19 000	18 000	19 000	22 400	25 000	25 000	25 000	22 400	8 000	14 000
	140 000	23 600	25 000	25 000	25 000	22 400	21 200	21 200	22 400	20 000	20 000	21 200	23 600	25 000	25 000	25 000	22 400	8 000	14 000
900 000	280 000	22 400	22 400	20 000	17 000	16 000	17 000	17 000	19 000	16 000	14 000	16 000	21 200	25 000	23 600	20 000	18 000	5 300	12 500
	200 000	22 400	25 000	23 600	22 400	20 000	18 000	18 000	20 000	18 000	17 000	18 000	21 200	25 000	25 000	25 000	21 200	8 000	13 200
	140 000	22 400	23 600	23 600	22 400	21 200	19 000	19 000	20 000	19 000	18 000	19 000	21 200	25 000	25 000	23 600	21 200	8 000	13 200
1 120 000	200 000	21 200	23 600	21 200	20 000	19 000	17 000	17 000	18 000	16 000	15 000	17 000	20 000	23 600	25 000	22 400	19 000	7 100	12 500
	140 000	21 200	22 400	22 400	21 200	19 000	18 000	18 000	19 000	18 000	17 000	18 000	20 000	22 400	23 600	22 400	20 000	8 000	12 500
1 400 000	200 000	20 000	21 200	19 000	18 000	17 000	16 000	15 000	17 000	15 000	14 000	15 000	18 000	22 400	22 400	20 000	18 000	6 000	11 200
	140 000	20 000	22 400	20 000	19 000	18 000	16 000	16 000	17 000	16 000	15 000	16 000	19 000	21 200	22 400	21 200	18 000	8 000	11 800
1 800 000	200 000	19 000	19 000	18 000	16 000	14 000	14 000	14 000	16 000	13 200	12 500	14 000	17 000	21 200	20 000	18 000	16 000	5 300	10 600
	140 000	18 000	20 000	20 000	19 000	17 000	15 000	15 000	17 000	15 000	14 000	15 000	18 000	20 000	21 200	20 000	17 000	7 100	10 600
2 240 000	140 000	17 000	19 000	19 000	17 000	16 000	14 000	14 000	15 000	14 000	12 500	14 000	17 000	19 000	20 000	19 000	16 000	6 300	10 000
	100 000	17 000	18 000	18 000	17 000	16 000	15 000	15 000	16 000	15 000	14 000	15 000	17 000	18 000	19 000	18 000	16 000	7 500	10 000
2 800 000	140 000	16 000	18 000	17 000	15 000	14 000	12 500	12 500	14 000	12 500	11 800	12 500	15 000	18 000	19 000	17 000	15 000	5 600	9 500
	100 000	16 000	17 000	17 000	16 000	15 000	13 200	13 200	14 000	13 200	12 500	13 200	15 000	17 000	18 000	17 000	15 000	7 100	9 500
3 550 000	140 000	15 000	17 000	15 000	14 000	13 200	11 800	11 800	12 500	11 200	10 600	11 800	14 000	17 000	17 000	16 000	14 000	5 000	8 500
	100 000	15 000	16 000	16 000	15 000	13 200	12 500	12 500	13 200	12 500	11 800	12 500	14 000	16 000	17 000	16 000	14 000	6 300	9 000
4 500 000	140 000	14 000	15 000	14 000	12 500	11 800	11 200	11 200	11 800	10 600	10 000	10 600	13 200	16 000	16 000	14 000	12 500	4 250	8 000
	100 000	14 000	15 000	15 000	14 000	12 500	11 800	11 800	12 500	11 200	11 200	11 800	13 200	15 000	16 000	15 000	13 200	5 600	8 500
5 600 000	140 000	13 200	14 000	12 500	11 200	10 600	10 000	10 000	11 200	9 500	9 000	10 000	11 800	15 000	14 000	12 500	11 800	3 750	7 500
	100 000	12 500	14 000	14 000	13 200	11 800	10 600	10 600	11 800	10 600	10 000	10 600	12 500	14 000	15 000	14 000	12 500	5 000	7 500
max		25 000 (14 000 for «short side»)																8 000	16 000

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **groove side** •

Size **250**

$n_2 \cdot L_h$	T_2																	$F_{a2}^{(1)}$	
		0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
280 000	200 000	20 000	20 000	20 000	20 000	20 000	17 000	15 000	17 000	16 000	13 200	14 000	19 000	20 000	20 000	20 000	20 000	6 300	12 500
	140 000	20 000	20 000	20 000	20 000	20 000	19 000	17 000	19 000	18 000	16 000	17 000	20 000	20 000	20 000	20 000	20 000	6 300	12 500
355 000	200 000	20 000	20 000	20 000	20 000	20 000	15 000	13 200	15 000	14 000	11 200	12 500	17 000	20 000	20 000	20 000	20 000	6 300	12 500
	140 000	20 000	20 000	20 000	20 000	20 000	17 000	16 000	17 000	17 000	14 000	15 000	19 000	20 000	20 000	20 000	20 000	6 300	12 500
450 000	200 000	18 000	20 000	20 000	20 000	19 000	13 200	11 800	13 200	12 500	10 000	11 200	16 000	20 000	20 000	20 000	19 000	6 300	12 500
	140 000	19 000	20 000	20 000	20 000	20 000	16 000	14 000	16 000	15 000	13 200	14 000	18 000	20 000	20 000	20 000	20 000	6 300	12 500
560 000	200 000	17 000	20 000	20 000	20 000	17 000	11 800	10 600	11 800	11 200	8 500	9 500	14 000	20 000	20 000	20 000	18 000	5 600	11 800
	140 000	18 000	20 000	20 000	20 000	18 000	14 000	13 200	14 000	13 200	11 800	12 500	16 000	20 000	20 000	20 000	19 000	6 300	12 500
710 000	200 000	15 000	20 000	20 000	19 000	15 000	10 600	9 500	10 600	9 500	7 500	8 000	12 500	20 000	20 000	20 000	16 000	4 750	11 200
	140 000	16 000	20 000	20 000	20 000	17 000	13 200	11 800	12 500	12 500	10 600	11 200	15 000	20 000	20 000	20 000	17 000	6 300	11 800
	100 000	17 000	20 000	20 000	20 000	17 000	14 000	13 200	14 000	14 000	12 500	13 200	16 000	20 000	20 000	20 000	18 000	6 300	11 800
900 000	200 000	14 000	20 000	20 000	18 000	12 500	9 500	8 000	9 500	8 000	6 300	7 100	11 200	20 000	20 000	20 000	14 000	3 750	10 600
	140 000	15 000	20 000	20 000	20 000	16 000	11 800	10 600	11 800	11 200	9 500	10 000	13 200	20 000	20 000	20 000	16 000	6 000	10 600
	100 000	16 000	19 000	20 000	19 000	16 000	13 200	11 800	13 200	12 500	11 200	11 800	15 000	19 000	20 000	20 000	16 000	6 300	10 600
1 120 000	140 000	14 000	19 000	20 000	18 000	14 000	10 600	9 500	10 600	10 000	8 500	9 000	12 500	19 000	20 000	20 000	15 000	5 300	10 000
	100 000	15 000	18 000	20 000	18 000	15 000	11 800	11 200	11 800	11 800	10 600	11 200	13 200	18 000	20 000	19 000	15 000	6 300	10 000
1 400 000	140 000	12 500	18 000	19 000	17 000	13 200	9 500	8 500	9 500	9 000	7 100	8 000	11 200	17 000	20 000	19 000	13 200	4 750	9 000
	100 000	13 200	17 000	18 000	17 000	14 000	11 200	10 000	11 200	10 600	9 000	10 000	12 500	17 000	19 000	18 000	14 000	6 000	9 500
1 800 000	140 000	11 800	17 000	17 000	15 000	11 800	8 500	7 500	8 500	8 000	6 300	6 700	10 000	16 000	19 000	17 000	12 500	4 000	8 500
	100 000	12 500	16 000	17 000	16 000	12 500	10 600	9 000	10 000	9 500	8 500	9 000	11 800	16 000	18 000	17 000	13 200	5 600	9 000
2 240 000	100 000	11 800	15 000	17 000	15 000	11 800	9 500	8 500	9 000	9 000	7 500	8 000	10 600	15 000	18 000	16 000	11 800	5 000	8 000
	71 000	11 800	14 000	15 000	14 000	11 800	10 600	9 500	10 000	10 000	9 000	9 500	11 200	14 000	16 000	15 000	12 500	6 000	8 500
2 800 000	100 000	10 600	14 000	16 000	14 000	11 200	8 500	7 500	8 500	8 000	6 700	7 100	9 500	14 000	17 000	15 000	11 200	4 250	7 500
	71 000	11 200	13 200	14 000	13 200	11 200	9 500	8 500	9 500	9 000	8 500	8 500	10 600	13 200	15 000	14 000	11 800	5 300	8 000
3 550 000	100 000	10 000	13 200	14 000	12 500	10 000	7 500	6 700	7 500	7 100	6 000	6 300	9 000	13 200	16 000	14 000	10 600	3 750	7 100
	71 000	10 600	12 500	14 000	12 500	10 600	8 500	8 000	8 500	8 500	7 100	7 500	9 500	12 500	14 000	13 200	10 600	5 000	7 100
4 500 000	100 000	9 000	12 500	13 200	11 800	9 500	6 700	6 000	6 700	6 300	5 000	5 600	8 000	11 800	15 000	13 200	9 500	3 350	6 700
	71 000	9 500	11 800	13 200	11 800	10 000	8 000	7 100	8 000	7 500	6 700	7 100	9 000	11 800	13 200	12 500	10 000	4 500	6 700
5 600 000	100 000	8 500	11 800	11 800	10 600	8 500	6 000	5 300	6 000	5 600	4 500	4 750	7 100	11 200	14 000	11 800	9 000	2 800	6 000
	71 000	9 000	11 200	12 500	11 200	9 000	7 100	6 700	7 100	6 700	6 000	6 300	8 000	11 200	13 200	11 800	9 500	4 000	6 300
max		20 000																6 300	12 500

Values valid for metric «Solid low speed shaft»⁴⁾ (see ch.17 (2)).


Size **280**

280 000	280 000	25 000	25 000	25 000	25 000	25 000	22 400	20 000	22 400	21 200	18 000	19 000	25 000	25 000	25 000	25 000	8 000	16 000	
	200 000	25 000	25 000	25 000	25 000	25 000	25 000	23 600	25 000	25 000	21 200	22 400	25 000	25 000	25 000	25 000	8 000	16 000	
355 000	280 000	25 000	25 000	25 000	25 000	25 000	20 000	18 000	20 000	19 000	16 000	17 000	23 600	25 000	25 000	25 000	8 000	16 000	
	200 000	25 000	25 000	25 000	25 000	25 000	22 400	21 200	22 400	22 400	19 000	20 000	25 000	25 000	25 000	25 000	8 000	16 000	
450 000	280 000	23 600	25 000	25 000	25 000	25 000	18 000	16 000	18 000	17 000	14 000	15 000	21 200	25 000	25 000	25 000	8 000	16 000	
	200 000	25 000	25 000	25 000	25 000	25 000	21 200	19 000	20 000	20 000	18 000	19 000	23 600	25 000	25 000	25 000	8 000	16 000	
560 000	280 000	22 400	25 000	25 000	25 000	23 600	17 000	14 000	16 000	15 000	11 800	12 500	19 000	25 000	25 000	25 000	23 600	7 500	15 000
	200 000	23 600	25 000	25 000	25 000	23 600	19 000	17 000	19 000	18 000	16 000	17 000	21 200	25 000	25 000	25 000	25 000	8 000	15 000
710 000	280 000	20 000	25 000	25 000	25 000	21 200	15 000	12 500	14 000	13 200	10 000	11 200	17 000	25 000	25 000	25 000	21 200	6 300	13 200
	200 000	21 200	25 000	25 000	25 000	22 400	18 000	16 000	17 000	17 000	14 000	15 000	20 000	25 000	25 000	25 000	23 600	8 000	14 000
	140 000	22 400	25 000	25 000	25 000	22 400	19 000	18 000	19 000	19 000	17 000	18 000	21 200	25 000	25 000	25 000	23 600	8 000	14 000
900 000	280 000	18 000	25 000	25 000	25 000	18 000	12 500	11 200	12 500	11 200	9 000	9 500	15 000	25 000	25 000	25 000	20 000	5 300	12 500
	200 000	20 000	25 000	25 000	25 000	21 200	16 000	14 000	15 000	15 000	12 500	13 200	18 000	25 000	25 000	25 000	21 200	8 000	13 200
	140 000	21 200	25 000	25 000	25 000	21 200	18 000	17 000	18 000	17 000	15 000	16 000	20 000	25 000	25 000	25 000	22 400	8 000	13 200
1 120 000	200 000	19 000	25 000	25 000	25 000	19 000	14 000	12 500	14 000	13 200	11 200	11 800	17 000	23 600	25 000	25 000	20 000	7 100	12 500
	140 000	19 000	23 600	25 000	23 600	20 000	17 000	15 000	16 000	16 000	14 000	15 000	18 000	23 600	25 000	25 000	20 000	8 000	12 500
1 400 000	200 000	17 000	23 600	25 000	22 400	18 000	12 500	11 200	12 500	11 800	9 500	10 600	15 000	22 400	25 000	25 000	18 000	6 000	11 200
	140 000	17 000	22 400	25 000	23 600	18 000	13 200	11 800	13 200	14 000	12 500	13 200	17 000	22 400	25 000	23 600	19 000	8 000	11 800
1 800 000	200 000	16 000	22 400	23 600	21 200	17 000	11 800	10 000	11 200	10 600	8 500	9 000	13 200	21 200	25 000	23 600	17 000	5 300	10 600
	140 000	17 000	21 200	23 600	21 200	17 000	13 200	12 500	13 200	12 500	11 200	11 800	15 000	21 200	25 000	22 400	18 000	7 100	10 600
2 240 000	140 000	15 000	20 000	22 400	20 000	16 000	12 500	11 200	11 800	11 800	10 000	10 600	14 000	19 000	23 600	21 200	17 000	6 300	10 600
	100 000	16 000	19 000	20 000	19 000	17 000	14 000	12 500	13 200	13 200	11 800	12 500	15 000	19 000	21 200	20 000	17 000	7 500	10 000
2 800 000	140 000	14 000	18 000	21 200	19 000	15 000	11 200	10 000	11 200	10 600	9 000	9 500	12 500	18 000	22 400	20 000	15 000	5 600	9 500
	100 000	15 000	18 000	19 000	18 000	15 000	12 500	11 200	12 500	12 500	10 600	11 200	14 000	18 000	20 000	19 000	15 000	7 100	9 500
3 550 000	140 000	13 200	18 000	19 000	18 000	13 200	10 000	9 000	10 000	9 500	8 000	8 500	11 800	17 000	21 200	19 000	14 000	5 000	8 500
	100 000	13 200	17 000	18 000	17 000	14 000	11 200	10 600	11 200	11 200	9 500	10 000	12 500	17 000	19 000	18 000	14 000	6 300	9 000
4 500 000	140 000	11 800	17 000	18 000	16 000	12 500	9 000	8 000	9 000	8 500	7 100	7 500	10 600	16 000	20 000	18 000	12 500	4 250	8 000
	100 000	12 500	16 000	17 000	16 000	13 200	10 600	9 500	10 600	10 000	9 000	9 500	11 800	16 000	18 000	17 000	13 200	5 600	8 500
5 600 000	140 000	11 200	16 000	17 000	15 000	11 800	8 500	7 100	8 000	7 500	6 000	6 700	9 500	15 000	19 000	17 000	11 800	3 750	7 500
	100 000	11 800	15 000	17 000	15 000	11 800	9 500	9 000	9 500	9 000	8 000	8 500	10 600	15 000	17 000	16 000	12 500	5 000	7 500
max		25 000 (14 000 for «short side»)															8 000	16 000	

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **opposite side to groove**

Sizes **320, 321**

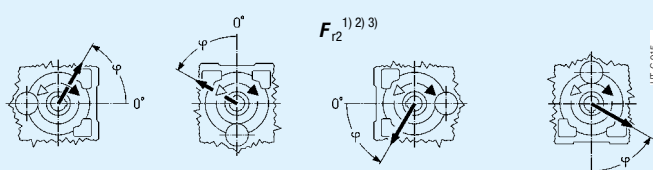$n_2 \cdot L_h$	T_2																	$F_{a2}^{1)}$
rpm · h	lb in	0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°	
280 000	400 000	30 000	31 500	31 500	31 500	31 500	31 500	30 000	26 500	31 500	31 500	30 000	30 000	31 500	31 500	31 500	31 500	20 000
	280 000	31 500	31 500	31 500	31 500	31 500	31 500	31 500	30 000	31 500	31 500	31 500	31 500	31 500	31 500	31 500	31 500	20 000
355 000	400 000	26 500	31 500	31 500	31 500	31 500	31 500	26 500	25 000	31 500	30 000	28 000	28 000	30 000	30 000	31 500	31 500	19 000
	280 000	30 000	31 500	31 500	31 500	31 500	31 500	30 000	28 000	31 500	26 500	30 000	30 000	30 000	31 500	31 500	31 500	20 000
450 000	400 000	23 600	28 000	31 500	31 500	31 500	31 500	25 000	22 400	31 500	28 000	25 000	26 500	25 000	28 000	31 500	31 500	18 000
	280 000	26 500	31 500	31 500	31 500	31 500	31 500	26 500	25 000	31 500	30 000	28 000	28 000	30 000	31 500	31 500	31 500	19 000
560 000	400 000	22 400	25 000	26 500	31 500	31 500	31 500	22 400	20 000	31 500	26 500	23 600	23 600	22 400	23 600	28 000	31 500	17 000
	280 000	25 000	28 000	31 500	31 500	31 500	30 000	25 000	23 600	31 500	26 500	25 000	25 000	28 000	30 000	31 500	31 500	17 000
710 000	400 000	20 000	21 200	23 600	28 000	30 000	26 500	20 000	18 000	30 000	23 600	21 200	20 000	19 000	21 200	25 000	28 000	15 000
	280 000	22 400	26 500	30 000	31 500	31 500	26 500	22 400	21 200	28 000	25 000	23 600	23 600	25 000	26 500	30 000	31 500	16 000
	200 000	23 600	26 500	30 000	31 500	31 500	26 500	23 600	22 400	28 000	26 500	23 600	25 000	26 500	28 000	30 000	30 000	17 000
900 000	400 000	18 000	18 000	21 200	25 000	28 000	25 000	19 000	17 000	26 500	22 400	19 000	17 000	16 000	18 000	21 200	25 000	14 000
	280 000	20 000	25 000	28 000	30 000	30 000	25 000	21 200	19 000	26 500	23 600	21 200	21 200	23 600	23 600	26 500	30 000	15 000
	200 000	22 400	25 000	28 000	30 000	30 000	25 000	22 400	21 200	26 500	23 600	22 400	22 400	25 000	26 500	28 000	28 000	15 000
1 120 000	280 000	19 000	22 400	25 000	28 000	28 000	23 600	19 000	18 000	25 000	21 200	20 000	20 000	21 200	22 400	23 600	26 500	13 200
	200 000	20 000	23 600	26 500	28 000	26 500	23 600	20 000	19 000	25 000	22 400	21 200	21 200	22 400	25 000	26 500	26 500	14 000
1 400 000	280 000	17 000	20 000	21 200	25 000	26 500	21 200	18 000	16 000	23 600	20 000	18 000	18 000	18 000	19 000	21 200	23 600	12 500
	200 000	19 000	21 200	25 000	26 500	25 000	22 400	19 000	18 000	22 400	20 000	19 000	19 000	21 200	23 600	25 000	25 000	13 200
1 800 000	280 000	16 000	18 000	19 000	22 400	23 600	20 000	16 000	14 000	22 400	18 000	17 000	17 000	16 000	17 000	20 000	22 400	11 800
	200 000	17 000	20 000	23 600	25 000	23 600	20 000	18 000	16 000	21 200	19 000	18 000	18 000	19 000	21 200	22 400	23 600	11 800
2 240 000	200 000	16 000	19 000	21 200	23 600	22 400	19 000	16 000	15 000	20 000	18 000	17 000	17 000	18 000	19 000	21 200	22 400	11 200
	140 000	17 000	19 000	21 200	22 400	21 200	19 000	17 000	16 000	20 000	18 000	17 000	17 000	19 000	20 000	21 200	21 200	11 800
2 800 000	200 000	14 000	17 000	19 000	21 200	21 200	18 000	15 000	13 200	19 000	17 000	15 000	15 000	17 000	17 000	19 000	21 200	10 600
	140 000	16 000	18 000	20 000	21 200	20 000	18 000	16 000	15 000	19 000	17 000	16 000	16 000	17 000	19 000	20 000	20 000	10 600
3 550 000	200 000	13 200	16 000	17 000	19 000	20 000	17 000	13 200	12 500	18 000	15 000	14 000	14 000	14 000	15 000	17 000	19 000	9 500
	140 000	14 000	17 000	19 000	20 000	19 000	17 000	15 000	14 000	18 000	16 000	15 000	15 000	16 000	18 000	19 000	19 000	10 000
4 500 000	200 000	12 500	14 000	15 000	17 000	19 000	15 000	12 500	11 200	17 000	14 000	12 500	12 500	12 500	13 200	15 000	17 000	9 000
	140 000	13 200	15 000	18 000	19 000	18 000	16 000	13 200	12 500	17 000	15 000	13 200	14 000	15 000	17 000	18 000	18 000	9 500
5 600 000	200 000	11 200	12 500	13 200	16 000	17 000	14 000	11 200	10 000	15 000	12 500	11 800	11 800	11 200	11 800	14 000	15 000	8 500
	140 000	12 500	14 000	17 000	18 000	17 000	14 000	12 500	11 800	15 000	13 200	12 500	12 500	14 000	15 000	16 000	17 000	8 500
max		31 500																20 000
																		10 000

Values valid for metric «Solid low speed shaft»⁴⁾ (see ch.17 (2)).



Sizes **360**

280 000	560 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	37 500	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	25 000	12 500	
	400 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	40 000	25 000	12 500	
355 000	560 000	35 500	40 000	40 000	40 000	40 000	40 000	40 000	35 500	33 500	40 000	40 000	37 500	37 500	40 000	40 000	40 000	25 000	12 500	
	400 000	37 500	40 000	40 000	40 000	40 000	40 000	40 000	40 000	37 500	40 000	40 000	40 000	40 000	40 000	40 000	40 000	25 000	12 500	
450 000	560 000	33 500	40 000	40 000	40 000	40 000	40 000	40 000	33 500	31 500	40 000	37 500	33 500	35 500	37 500	40 000	40 000	25 000	12 500	
	400 000	35 500	40 000	40 000	40 000	40 000	40 000	40 000	35 500	33 500	40 000	40 000	37 500	37 500	40 000	40 000	40 000	25 000	12 500	
560 000	560 000	30 000	35 500	40 000	40 000	40 000	40 000	37 500	31 500	28 000	40 000	35 500	31 500	31 500	31 500	35 500	40 000	40 000	23 600	11 200
	400 000	33 500	37 500	40 000	40 000	40 000	40 000	33 500	31 500	28 000	40 000	35 500	33 500	33 500	37 500	40 000	40 000	40 000	23 600	12 500
710 000	560 000	28 000	31 500	35 500	40 000	40 000	35 500	28 000	25 000	37 500	31 500	30 000	30 000	28 000	31 500	35 500	40 000	21 200	9 500	
	400 000	30 000	35 500	40 000	40 000	40 000	35 500	31 500	28 000	37 500	33 500	31 500	31 500	33 500	37 500	40 000	40 000	22 400	12 500	
	280 000	31 500	35 500	40 000	40 000	40 000	35 500	33 500	31 500	37 500	35 500	33 500	33 500	35 500	37 500	40 000	40 000	23 600	12 500	
900 000	560 000	25 000	28 000	31 500	35 500	40 000	33 500	25 000	22 400	35 500	30 000	26 500	26 500	25 000	28 000	31 500	35 500	20 000	8 000	
	400 000	28 000	33 500	37 500	40 000	40 000	33 500	28 000	26 500	35 500	31 500	30 000	30 000	31 500	33 500	37 500	40 000	21 200	12 500	
	280 000	30 000	33 500	37 500	40 000	40 000	33 500	30 000	30 000	35 500	31 500	31 500	31 500	33 500	35 500	37 500	37 500	21 200	12 500	
1 120 000	400 000	25 000	31 500	35 500	37 500	37 500	31 500	26 500	23 600	33 500	30 000	26 500	26 500	30 000	31 500	33 500	37 500	19 000	10 600	
	280 000	28 000	31 500	35 500	37 500	35 500	31 500	28 000	26 500	33 500	30 000	28 000	28 000	31 500	33 500	35 500	35 500	20 000	12 500	
1 400 000	400 000	23 600	28 000	31 500	35 500	35 500	30 000	23 600	21 200	31 500	26 500	23 600	25 000	26 500	28 000	31 500	33 500	18 000	9 000	
	280 000	25 000	30 000	33 500	35 500	33 500	30 000	26 500	23 600	31 500	28 000	26 500	26 500	28 000	31 500	33 500	33 500	18 000	12 500	
1 800 000	400 000	21 200	25 000	28 000	31 500	33 500	28 000	21 200	20 000	30 000	25 000	22 400	22 400	22 400	25 000	28 000	31 500	17 000	8 000	
	280 000	23 600	28 000	31 500	33 500	31 500	28 000	23 600	22 400	30 000	26 500	23 600	23 600	26 500	30 000	31 500	31 500	17 000	11 200	
2 240 000	280 000	21 200	25 000	30 000	31 500	30 000	26 500	22 400	20 000	28 000	23 600	22 400	22 400	25 000	26 500	30 000	30 000	16 000	10 000	
	200 000	22 400	26 500	30 000	31 500	30 000	26 500	23 600	22 400	26 500	25 000	23 600	23 600	25 000	28 000	30 000	30 000	17 000	12 500	
2 800 000	280 000	20 000	23 600	28 000	30 000	28 000	23 600	20 000	19 000	25 000	22 400	20 000	20 000	22 400	25 000	26 500	28 000	15 000	9 000	
	200 000	21 200	23 600	28 000	30 000	28 000	23 600	21 200	20 000	25 000	22 400	21 200	21 200	23 600	25 000	28 000	26 500	15 000	11 200	
3 550 000	280 000	18 000	21 200	25 000	28 000	26 500	22 400	18 000	17 000	23 600	20 000	19 000	19 000	21 200	22 400	23 600	26 500	13 200	7 500	
	200 000	19 000	22 400	25 000	26 500	26 500	22 400	20 000	19 000	23 600	21 200	20 000	20 000	21 200	23 600	25 000	25 000	14 000	10 000	
4 500 000	280 000	17 000	20 000	22 400	25 000	25 000	21 200	17 000	15 000	22 400	19 000	17 000	18 000	19 000	20 000	22 400	23 600	12 500	6 700	
	200 000	18 000	21 200	23 600	25 000	23 600	21 200	18 000	17 000	22 400	20 000	18 000	19 000	20 000	22 400	23 600	23 600	13 200	9 000	
5 600 000	280 000	15 000	18 000	20 000	22 400	23 600	19 000	15 000	14 000	21 200	18 000	16 000	16 000	16 000	18 000	20 000	22 400	11 800	5 600	
	200 000	17 000	19 000	22 400	23 600	22 400	19 000	17 000	16 000	20 000	18 000	17 000	17 000	19 000	21 200	22 400	22 400	11 800	8 000	
max		40 000 (22 400 for «short side»)																	25 000	12 500

Axial F_{a2} [lb] or radial loads F_{r2} [lb] on low speed shaft end 3.10

Radial load applied on **groove side** •

Sizes **320, 321**

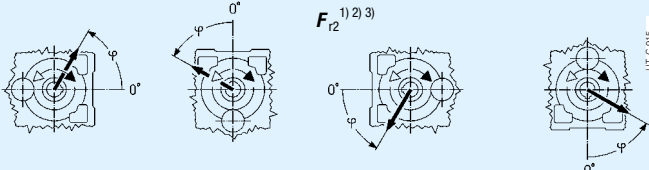$n_2 \cdot L_h$	T_2																		
		0°	45°	90°	135°	180°	225°	270°	315°	0°	45°	90°	135°	180°	225°	270°	315°		
280 000	400 000	23 600	31 500	31 500	31 500	31 500	28 000	20 000	19 000	31 500	23 600	22 400	25 000	31 500	31 500	31 500	31 500	20 000	10 000
	280 000	28 000	31 500	31 500	31 500	31 500	31 500	25 000	23 600	31 500	28 000	26 500	30 000	31 500	31 500	31 500	31 500	20 000	10 000
355 000	400 000	21 200	31 500	31 500	31 500	31 500	26 500	18 000	17 000	30 000	21 200	19 000	22 400	31 500	31 500	31 500	31 500	19 000	10 000
	280 000	25 000	31 500	31 500	31 500	31 500	30 000	22 400	21 200	31 500	25 000	23 600	26 500	31 500	31 500	31 500	31 500	20 000	10 000
450 000	400 000	18 000	30 000	31 500	31 500	31 500	23 600	16 000	14 000	26 500	19 000	17 000	20 000	30 000	31 500	31 500	31 500	18 000	8 500
	280 000	23 600	31 500	31 500	31 500	31 500	26 500	21 200	19 000	30 000	23 600	21 200	23 600	31 500	31 500	31 500	31 500	19 000	10 000
560 000	400 000	16 000	28 000	31 500	31 500	31 500	20 000	13 200	11 800	25 000	17 000	15 000	18 000	26 500	31 500	31 500	31 500	17 000	7 100
	280 000	21 200	30 000	31 500	31 500	31 500	25 000	19 000	17 000	26 500	21 200	19 000	21 200	28 000	31 500	31 500	31 500	17 000	10 000
710 000	400 000	13 200	25 000	31 500	31 500	31 500	18 000	11 200	10 000	22 400	15 000	12 500	16 000	22 400	31 500	31 500	31 500	15 000	5 600
	280 000	19 000	26 500	31 500	31 500	31 500	22 400	17 000	15 000	25 000	19 000	17 000	20 000	26 500	31 500	31 500	31 500	16 000	9 500
900 000	400 000	21 200	28 000	31 500	31 500	31 500	25 000	20 000	19 000	26 500	21 200	20 000	22 400	26 500	31 500	31 500	31 500	17 000	10 000
	280 000	11 200	22 400	31 500	31 500	31 500	16 000	9 500	8 500	20 000	12 500	11 200	14 000	20 000	28 000	31 500	31 500	14 000	4 500
1 120 000	400 000	17 000	25 000	31 500	31 500	31 500	20 000	15 000	13 200	22 400	17 000	16 000	18 000	23 600	31 500	31 500	31 500	15 000	8 500
	280 000	20 000	26 500	31 500	31 500	31 500	22 400	18 000	17 000	23 600	20 000	18 000	20 000	25 000	31 500	31 500	30 000	15 000	10 000
1 400 000	400 000	15 000	23 600	31 500	31 500	28 000	18 000	12 500	11 800	21 200	15 000	14 000	16 000	22 400	30 000	31 500	30 000	13 200	7 100
	280 000	18 000	23 600	31 500	31 500	28 000	20 000	16 000	15 000	22 400	18 000	17 000	19 000	23 600	30 000	31 500	28 000	14 000	9 500
1 800 000	400 000	12 500	21 200	30 000	31 500	26 500	17 000	11 200	10 000	19 000	13 200	11 800	14 000	20 000	26 500	30 000	28 000	12 500	6 000
	280 000	16 000	22 400	30 000	31 500	26 500	19 000	14 000	13 200	20 000	16 000	15 000	17 000	21 200	26 500	30 000	26 500	13 200	8 500
2 240 000	400 000	11 200	19 000	28 000	31 500	25 000	15 000	9 500	9 000	18 000	11 800	10 600	12 500	19 000	23 600	28 000	26 500	11 800	5 000
	280 000	15 000	20 000	28 000	30 000	25 000	17 000	12 500	12 500	19 000	15 000	13 200	15 000	20 000	26 500	28 000	25 000	11 800	7 500
2 800 000	400 000	13 200	19 000	26 500	28 000	22 400	16 000	11 800	11 200	18 000	13 200	12 500	14 000	19 000	23 600	26 500	23 600	11 200	6 700
	280 000	15 000	20 000	23 600	25 000	22 400	17 000	14 000	13 200	18 000	15 000	14 000	16 000	19 000	22 400	25 000	22 400	11 800	8 500
3 550 000	400 000	11 800	18 000	22 400	23 600	21 200	14 000	10 000	9 500	16 000	11 800	11 200	12 500	17 000	22 400	25 000	22 400	10 600	5 600
	280 000	14 000	18 000	22 400	23 600	21 200	16 000	12 500	11 800	17 000	14 000	13 200	14 000	18 000	21 200	23 600	21 200	10 600	7 500
4 500 000	400 000	10 600	16 000	22 400	25 000	20 000	12 500	9 000	8 500	15 000	10 600	9 500	11 200	16 000	20 000	22 400	20 000	9 500	5 000
	280 000	12 500	17 000	21 200	22 400	19 000	15 000	11 200	11 200	16 000	12 500	11 800	13 200	17 000	20 000	22 400	20 000	10 000	6 700
5 600 000	400 000	9 000	15 000	21 200	23 600	19 000	11 800	8 000	7 100	13 200	9 500	8 500	10 000	15 000	19 000	21 200	19 000	9 000	4 250
	280 000	11 800	16 000	20 000	21 200	18 000	13 200	10 600	10 000	15 000	11 800	10 600	11 800	15 000	19 000	21 200	19 000	9 500	6 000
max	400 000	8 000	13 200	19 000	21 200	18 000	10 600	6 700	6 300	12 500	8 500	7 500	9 000	13 200	17 000	19 000	18 000	8 500	3 550
	280 000	10 600	15 000	19 000	20 000	17 000	12 500	9 500	9 000	13 200	10 600	9 500	11 200	14 000	18 000	20 000	18 000	8 500	5 300
max		31 500																20 000	10 000


Values valid for metric «Solid low speed shaft»⁴⁾ (see ch.17 (2)).

Sizes **360**

280 000	560 000	33 500	40 000	40 000	40 000	40 000	40 000	40 000	30 000	28 000	40 000	33 500	31 500	35 500	40 000	40 000	40 000	40 000	25 000	12 500
	400 000	37 500	40 000	40 000	40 000	40 000	40 000	40 000	35 500	33 500	40 000	37 500	35 500	40 000	40 000	40 000	40 000	40 000	25 000	12 500
355 000	560 000	30 000	40 000	40 000	40 000	40 000	40 000	35 500	26 500	23 600	40 000	31 500	28 000	31 500	40 000	40 000	40 000	40 000	25 000	12 500
	400 000	35 500	40 000	40 000	40 000	40 000	40 000	40 000	31 500	30 000	40 000	35 500	33 500	35 500	40 000	40 000	40 000	40 000	25 000	12 500
450 000	560 000	26 500	40 000	40 000	40 000	40 000	40 000	33 500	23 600	21 200	37 500	28 000	25 000	28 000	40 000	40 000	40 000	40 000	25 000	12 500
	400 000	31 500	40 000	40 000	40 000	40 000	40 000	37 500	30 000	28 000	40 000	31 500	30 000	33 500	40 000	40 000	40 000	40 000	25 000	12 500
560 000	560 000	23 600	37 500	40 000	40 000	40 000	40 000	30 000	20 000	18 000	33 500	25 000	22 400	25 000	35 500	40 000	40 000	40 000	23 600	11 200
	400 000	30 000	40 000	40 000	40 000	40 000	40 000	33 500	26 500	25 000	37 500	30 000	26 500	30 000	37 500	40 000	40 000	40 000	23 600	12 500
710 000	560 000	20 000	33 500	40 000	40 000	40 000	40 000	26 500	17 000	16 000	31 500	22 400	19 000	22 400	33 500	40 000	40 000	40 000	21 200	9 500
	400 000	26 500	35 500	40 000	40 000	40 000	40 000	31 500	23 600	21 200	33 500	26 500	23 600	28 000	35 500	40 000	40 000	40 000	22 400	12 500
280 000	560 000	30 000	37 500	40 000	40 000	40 000	40 000	33 500	28 000	26 500	35 500	30 000	28 000	30 000	35 500	40 000	40 000	40 000	23 600	12 500
	400 000	30 000	37 500	40 000	40 000	40 000	40 000	33 500	28 000	26 500	35 500	30 000	28 000	30 000	35 500	40 000	40 000	40 000	23 600	12 500
900 000	560 000	17 000	31 500	40 000	40 000	40 000	40 000	23 600	15 000	13 200	30 000	19 000	17 000	20 000	30 000	37 500	40 000	40 000	20 000	8 000
	400 000	23 600	33 500	40 000	40 000	40 000	40 000	28 000	21 200	19 000	31 500	23 600	23 600	25 000	33 500	40 000	40 000	40 000	21 200	12 500
280 000	560 000	28 000	33 500	40 000	40 000	40 000	40 000	31 500	25 000	23 600	33 500	28 000	26 500	28 000	33 500	40 000	40 000	40 000	21 200	12 500
	400 000	30 000	37 500	40 000	40 000	40 000	40 000	31 500	25 000	23 600	33 500	28 000	26 500	28 000	33 500	40 000	40 000	40 000	21 200	12 500
1 120 000	560 000	21 200	31 500	40 000	40 000	40 000	40 000	37 500	26 500	19 000	17 000	30 000	22 400	20 000	22 400	30 000	40 000	40 000	19 000	10 600
	280 000	25 000	31 500	40 000	40 000	40 000	40 000	37 500	30 000	22 400	21 200	31 500	25 000	23 600	26 500	31 500	37 500	40 000	20 000	12 500
1 400 000	560 000	18 000	28 000	40 000	40 000	40 000	40 000	35 500	23 600	16 000	15 000	26 500	19 000	17 000	20 000	28 000	35 500	40 000	18 000	9 000
	280 000	22 400	30 000	37 500	40 000	40 000	40 000	35 500	26 500	20 000	19 000	28 000	22 400	21 200	23 600	30 000	35 500	37 500	18 000	12 500
1 800 000	560 000	16 000	26 500	37 500	40 000	40 000	40 000	33 500	21 200	14 000	12 500	25 000	18 000	15 000	18 000	26 500	33 500	37 500	17 000	8 000
	280 000	20 000	28 000	35 500	37 500	33 500	33 500	23 600	19 000	17 000	26 500	21 200	19 000	21 200	26 500	33 500	35 500	33 500	17 000	11 200
2 240 000	560 000	19 000	26 500	33 500	35 500	31 500	31 500	22 400	17 000	16 000	23 600	19 000	18 000	19 000	25 000	31 500	35 500	31 500	16 000	10 000
	200 000	21 200	26 500	31 500	33 500	30 000	23 600	19 000	19 000	25 000	21 200	20 000	21 200	26 500	31 500	33 500	30 000	17 000	12 500	
2 800 000	560 000	17 000	23 600	31 500	35 500	30 000	20 000	15 000	14 000	22 400	17 000	16 000	18 000	18 000	23 600	30 000	33 500	30 000	15 000	9 000
	200 000	19 000	25 000	30 000	31 500	28 000	22 400	18 000	17 000	23 600	19 000	18 000	20 000	23 600	30 000	31 500	28 000	15 000	11 200	
3 550 000	560 000	15 000	22 400	31 500	33 500	28 000	18 000	13 200	11 800	20 000	15 000	14 000	16 000	21 200	28 000	31 500	28 000	13 200	7 500	
	200 000	18 000	22 400	28 000	30 000	26 500	20 000	16 000	15 000	21 200	18 000	17 000	18 000	22 400	26 500	30 000	26 500	14 000	10 000	
4 500 000	560 000	13 200	20 000	30 000	31 500	25 000	17 000	11 800	10 600	19 000	14 000	12 500	14 000	20 000	26 500	30 000	26 500	12 500	6 700	
	200 000	16 000	21 200	26 500	30 000	25 000	19 000	14 000	13 200	20 000	16 000	15 000	17 000	20 000	25 000	28 000	25 000	13 200	9 000	
5 600 000	560 000	11 800	19 000	26 500	30 000	23 600	15 000	10 000	9 000	17 000	12 500	11 200	12 500	18 000	23 600	26 500	25 000	11 800	5 600	
	200 000	14 000	20 000	25 000	28 000	23 600	17 000	13 200	12 500	19 000	15 000	13 200	15 000	19 000	23 600	26 500	23 600	11 800	8 000	
max		40 000 (22 400 for «short side»)																25 000	12 500	

Accessories and non-standard designs



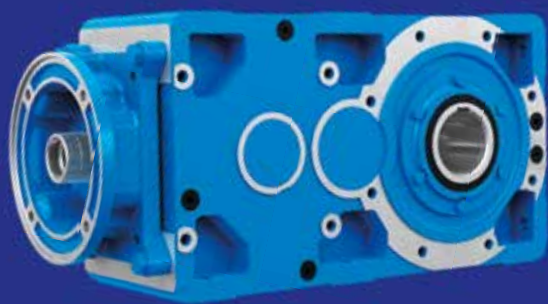

Section content

4.1	Overview	96
4.2	Miscellaneous	119

4.1 - Overview

Ref.	Description	Size	Designation
(8)	Flange	125 ... 360	flange B5
(9)	Backstop device	125 ... 360	backstop device free rotation white arrow backstop device free rotation black arrow
(10)	Reaction bolt using disc springs	125 ... 360	reaction bolt using disc springs
(12)	Reaction bolt using disc springs and bracket	125 ... 225	reaction bolt using disc springs and bracket
(13)	Rigid or flexible torque arm using bracket	125 ... 225	rigid torque arm using bracket flexible torque arm using bracket
(15)	Fan cooling	125 ... 360	fan cooling
(16)	Water cooling by coil	125 ... 360	water cooling by coil water cooling by coil and thermostatic valve
(17)	Independent cooling unit with internal heat exchanger	140 ... 360	Independent cooling unit with internal heat exchanger
(18)	Additional housing hole with oversized for pipe oil cooling	125 ... 360	additional housing hole with oversized diameter
(19)	Bearing lubrication pump	125 ... 360 125 ... 360	bearing lubrication pump high speed shaft lubrication device
(20)	Hollow low speed shaft washer	125 ... 360	hollow low speed shaft washer
(22)	Hollow low speed shaft protection cap	125 ... 360	hollow low speed shaft protection cap
(24)	Option paint	125 ... 360	option paint 1HRAL 5010 option paint 2HRAL 5010 option paint 3HRAL 5010 option paint 2IRAL 5010 option paint 2LRAL 5010
(25)	Heater	125 ... 360	heater
(26)	Seals on high and low speed shafts	125 ... 360	miscellaneous
(27)	Magnetic oil drain plug	125 ... 360	oil drain magnetic plug
(28)	Oil drain tap	125 ... 360	oil drain tap
(29)	Independent cooling unit	–	independent cooling unit oil-air UR O/A ... independent cooling unit oil-water UR O/W ... independent cooling unit oil-air UR O/A ... and bearing and/or gear forced lubrication ... independent cooling unit oil-water UR O/W ... and bearing and/or gear forced lubrication ...
(30)	Oil temperature probe	125 ... 360	oil temperature probe
(31)	Oil temperature probe with terminal box and amperometric transducer	200 ... 360	oil temperature probe with amperometric transducer
(32)	Bearing temperature probe	200 ... 360	bearing temperature probe
(33)	Bearing temperature probe with terminal box and amperometric transducer	200 ... 360	bearing temperature probe with amperometric transducer
(34)	Bi-metal type thermostat	100 ... 360	bi-metal type thermostat
(35)	Oil level switch with float	125 ... 360	oil level switch with float
(36)	Oil optical probe	125 ... 360	oil optical probe
(39)	Solid low speed shaft with inch diameter	125 ... 360	solid low speed shaft with inch diameter opposite to grove side solid low speed shaft with inch diameter to grove side solid low speed shaft with inch diameter double extension


(8) Flange (sizes 125 ... 360)

All gearmotors can be supplied with B5 flange having clearance holes and spigot «recess».

The accessory is supplied fitted onto the gearmotor. Unless otherwise stated, the mounting position is on groove opposite side (input opposite, for helical gear units: consult us). For groove side mounting position (for bevel helical gear units only), state in the designation: «**mounting on groove side**». Locking adhesives such as LOCTITE are recommended both around threads and on mating surfaces.

For dimensions H_1 and Z see ch. 3.7 and 3.9.

Supplementary description when ordering by **designation: flange B5**.

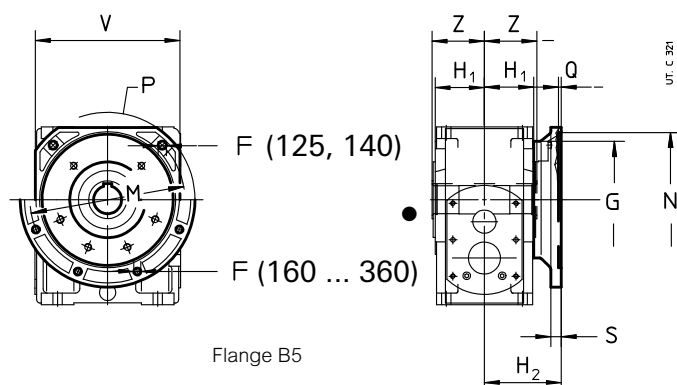


● Position of the reference groove (see ch. 3) for radial load verification.

Size	F Ø	G Ø	H ₂ h12	M Ø	N Ø H7	P Ø	Q	R	S	V □		Designation
125	18	180	154	300	250	350	6	—	20	290	19	Flange B5
140	18	230	165	350	300	400	6	—	22	350	29	Flange B5
160	18 ⁸	230	191	400	350	450	6	—	22	—	33	Flange B5
180	18 ⁸	250	191	400	350	450	6	—	22	—	44	Flange B5
200	18 ⁸	300	231	500	450	550	6	—	25	—	55	Flange B5
225	22 ⁸	350	231	500	450	550	6	—	25	—	68	Flange B5
250, 280	27 ⁸	450	280	600	550	660	7	—	30	—	110	Flange B5
320 ... 360	33 ⁸	550	345	740	680	800	7	—	37	—	176	Flange B5



(9) Backstop device (sizes 125 ... 360)

For the sizes stated in the table, helical and bevel helical **gearmotors** with $n_2 \geq 224$ rpm, can be supplied together with backstop device; the designs and the positions are the ones stated below. For the value of dimensions **a**, **C**, **H**, **H₁**, **H₀** see ch. 3.7 and 3.9.

Supplementary description when ordering by **designation: backstop device, white or black arrow free-rotation**.

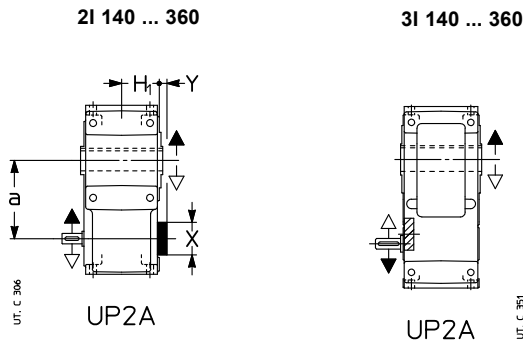

Size	2I, 3I	
	X Ø	Y
125, 140	72	10
160, 180	90	10
200, 225	110	10
250, 280	130	7
320 ... 360	170	7

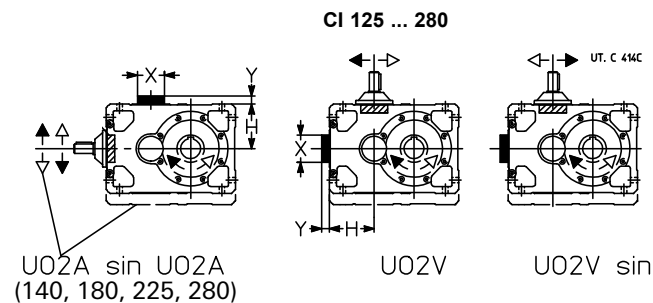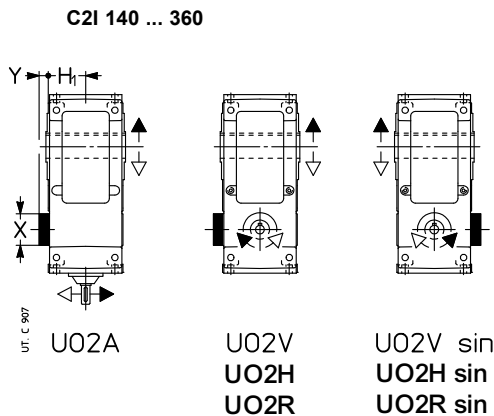

Size	CI		C2I	
	X Ø	Y	X Ø	Y
125, 140	122	16	72	10
160, 180	155	21	90	10
200, 225	190	21	110	10
250, 280	238	26	130	7
320 ... 360	—	—	170	7

Backstop device load capacity

Nominal torque T_{N2} [lb in] of backstop device when lower than T_{N2} of gearmotor (see ch. 3.6 and 3.8). Maximum permissible overload $1.7 \cdot T_{N2}$.

Size	Train of gears (i_N)		
	T_{N2} [lb in]	T_{N2} [lb in]	T_{N2} [lb in]
	3I (28) C2I (20)	2I (10) 3I (31.5) C2I (22.4)	3I (35.5) C2I (25)
140	25 000	28 000	31 500
180	50 000	56 000	63 000
225	100 000	112 000	125 000
280	190 000	206 000	236 000
321, 360	375 000	425 000	475 000

(10) Reaction bolt using disc spring (sizes 125 ... 360)


Reaction arrangement for shaft mounting

See technical explanations in ch. 5.

For dimensions **A**, **A₁**, **B** see ch. 3.7 and 3.9.

For trains of gears CI, apply this system **preferably** on side **1**; for trains of gears 2I, 3I do not apply on side **2**.

Supplementary description when ordering by **designation: reaction bolt using disc springs**.

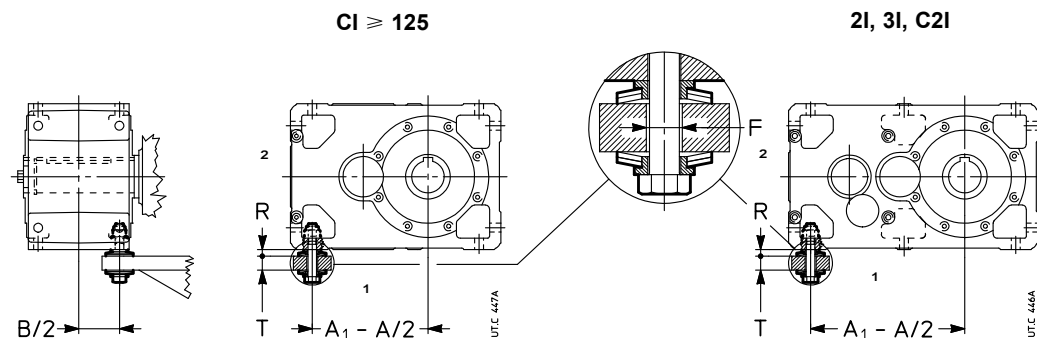

Size	Screw UNI 5737-88	Disc spring DIN 2093	T	F Ø	R 1)	$T_2 \leq$ 2) lb in
125, 140	M 16 × 110	A50 n.2	25 - 32	20	13.1	8 750
160, 180	M 20 × 130	A63 n.3	25 - 38	24	17.9	—
200, 225	M 24 × 160	A80 n.2	29 - 48	30	20.7	—
250, 280	M 30 × 200	A100 n.2	37 - 60	36	26.2	—
320 ... 360	M 36 × 260	A100 n.3	45 - 75	42	32.2	—


* Modified bolt.

1) Theoretical value: tolerance 0 / -1.

2) For higher T_2 values, use 2 reaction bolts or the arrangement with bracket (see following page).

(12) Reaction bolt using disc springs with bracket (sizes 125 ... 225)

Reaction arrangement for shaft mounting
See technical explanations in ch. 5
For dimensions **A**, **A₁**, **B** see ch. 3.7 and 3.9.
This arrangement can be applied, if need be (overall dimension, less stress or other reasons) on the **short** farthest side from low speed shaft also for parallel shaft gear reducers sizes 125 ... 225.
Supplementary description when ordering by **designation: reaction bolt using disc springs and bracket.**

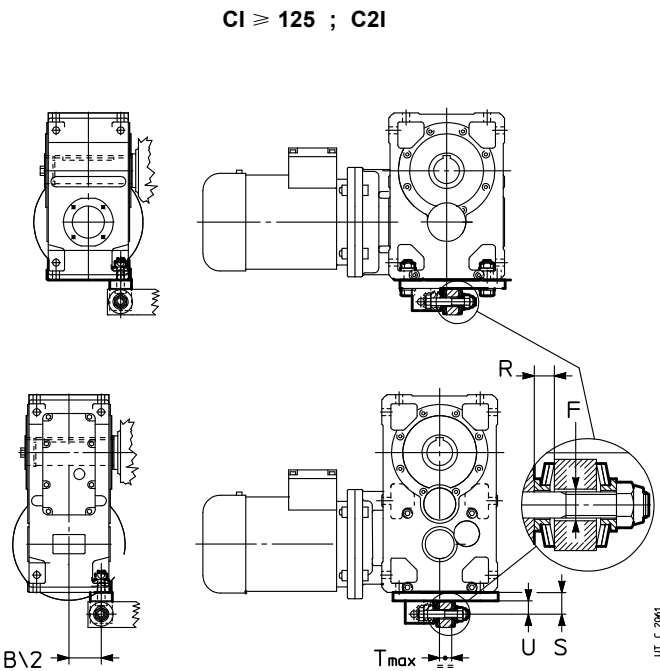

Gear reducer size	Screw	Disc spring	T	F Ø	S	U	R 1)	B/2
	DIN 931	DIN 2093						
125, 140 160, 180 200, 225	M 16 × 110	A 50 n.2	25 – 32	20	50	30	13.1	81
	M 20 × 130	A 63 n.3	23 – 38	24	65	40	17.9	100.5
	M 24 × 160	A 80 n.2	29 – 48	30	80	48	20.7	125

* Modified bolt.
1) Theoretical value: tolerance 0 / -1.

(13) Rigid or flexible torque arm using bracket (sizes 125 ... 225)

Reaction arrangement for shaft mounting


See technical explanations in ch. 5.

For dimensions **A**, **A₁**, **B** see ch. 3.7 and 3.9.

This arrangement can be applied, if need be (overall dimension, less stress or other reasons) on the short farthest side from low speed shaft in all gear reducers sizes 125 ... 225.


Supplementary description when ordering by **designation: rigid or flexible torque arm using bracket.**

CI ≥ 125

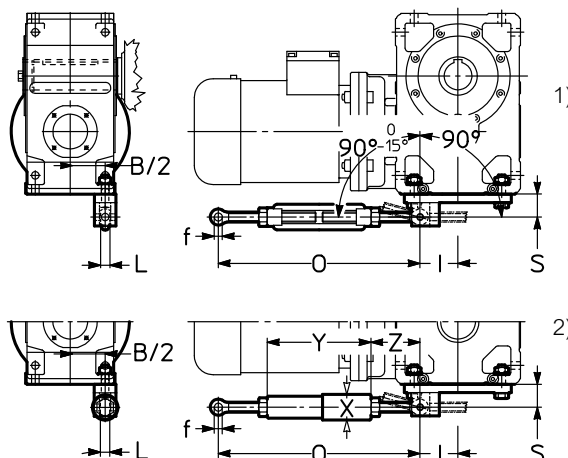

C2I

2I ≥ 140 ; 3I ≥ 140

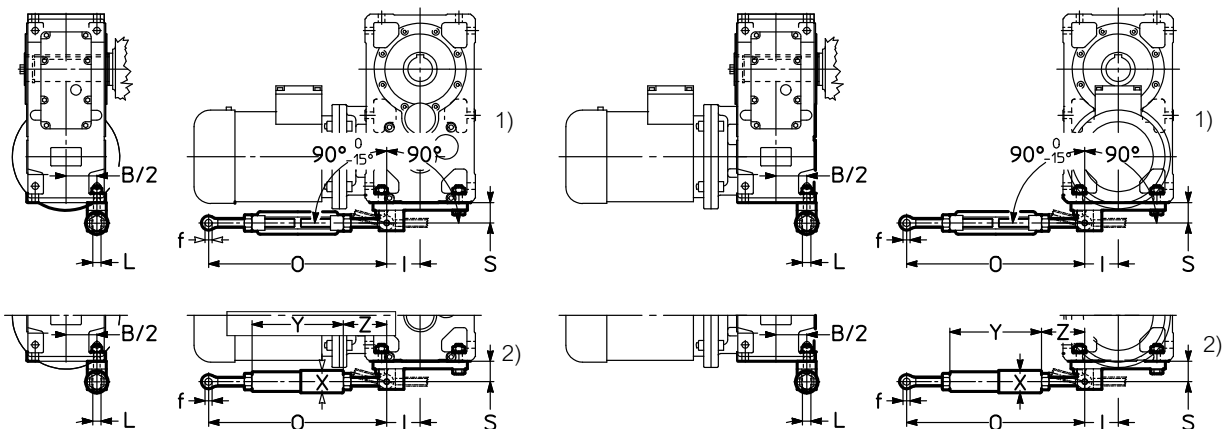


- 1) Rigid torque arm using bracket.
2) Flexible torque arm using bracket.

Gear red. size	f Ø	O	S	L	X Ø	Y	Z ≈	I	B/2
125, 140	16	410 – 510	50	17	52	242	84	74	81
160, 180	22	580 – 680	65	24	64	285	147	92	100.5
200, 225	28	580 – 680	80	30	88	305	137	113	125

(15) Fan cooling (sizes 125 ... 360)

Bevel helical gearmotors MR CI 125 ... 280, MR C2I 160 ... 360 ... **D** ..., ... **H** ..., ... **R** ... can be supplied fitted with **one** fan.

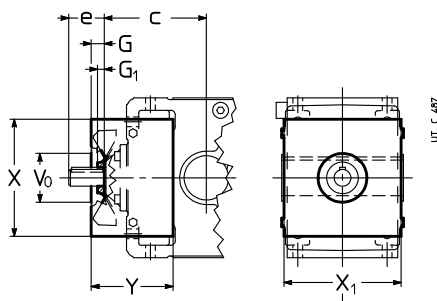

Gear reducer size CI			G	G₁	V₀ Ø	X	X₁ 1)	Y
125	MR		25	15	90	212	212	127
140	MR		25	15	90	212	212	127
160	MR		29	15	110	264	264	184
180	MR		29	15	110	264	264	184
200	MR	$i_N \leq 14$	41	20	130	326	326	232
		$i_N \geq 16$	41	15	130	326	326	232
225	MR	$i_N \leq 16$	41	20	130	326	326	232
		$i_N \geq 18$	41	15	130	326	326	232
250	MR	$i_N \leq 14$	46	25	150	426	404	293
		$i_N \geq 16$	46	20	150	426	404	293
280	MR	$i_N \leq 16$	46	25	150	426	404	293
		$i_N \geq 18$	46	20	150	426	404	293


Gear reducer size C2I			G	G₁	V₀ Ø	X	X₁ 1)	Y
160	MR		25	15	110	264	264	173
180	MR		25	15	110	264	264	173
200	MR		41	15	130	326	326	222
225	MR		41	15	130	326	326	222
250	MR	$i_N \leq 63$	41	20	150	426	404	268
		$i_N \geq 71$	41	15	150	426	404	268
280	MR	$i_N \leq 63$	41	20	150	426	404	268
		$i_N \geq 71$	41	15	150	426	404	268
320	MR	$31.5 \leq i_N \leq 28$	55	32	220	554	500	365
321			46	25	185	554	500	333
360			46	20	185	554	500	333

1) Bolts projecting 6 mm from dimension **X₁**.

1) Bolts projecting 6 mm from dimension **X₁**.

With double extension high speed shaft designs both extensions are **accessible** even with fan fitted: personnel safety-guards are the Buyer's responsibility (2006/42/EC).

Designs and positions are as shown below.

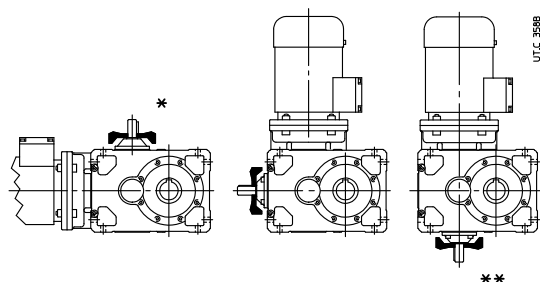

* Fan position is not possible for train of gears C2I.

** Not possible for MR CI sizes 140, 180, 225, 280.

Temperature of cooling air must not exceed ambient temperature.

Supplementary description when ordering by **designation: fan cooling**.

Also available independent cooling unit with heat exchanger (see ch. 4 (29)); consult us, if need be.

(16) Water cooling by coil (sizes 125 ... 360)

Gearmotors sizes 125 ... 360, excluding mounting positions V... with groove side towards the bottom, can be supplied with copper alloy coil for water cooling.

On request, available also stainless steel coil; consult us.

Cooling water specifications:

- be not too hard;
- max temperature 68 °F (20 °C);
- capacity 2.6 – 5.2 gal/min;
- pressure 29 – 58 psi (2 – 4 bar).

A smooth metallic pipe (with external diameter **d** stated on table) is sufficient for the connection.

The load loss in the coil, according to the water flow and pressure, is of 9 – 12 psi for diameters d Ø16 and 12 – 15 bar for diameters d Ø12.

On request **thermostatic valve** which, automatically and without auxiliary supply need, permits water circulation when gear reducer oil reaches the set temperature; the valve sensor is equipped with immersion bulb. Mounting and setting, adjustable within 122 – 194 °F (50 – 90 °C), are Buyer's responsibility.


For ambient temperature lower than 32 °F (0 °C) consult us.

Supplementary description when ordering by **designation: water cooling by coil** or **water cooling by coil and thermostatic valve**.

Gear reducer size	A ¹⁾ ≈	B ¹⁾ ≈	d Ø	T _S ²⁾ lb in
125 ... 180	40	40	12	305
200 ... 225	50	40	12	265
320 ... 360	60	45	16	305

1) Values valid for B3 mounting position and U ... A design. For other mounting positions and/or designs: consult us.

2) Tightening torque.

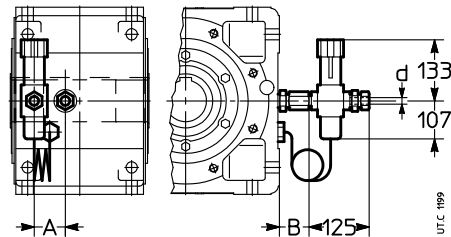

(17) Cooling by internal exchanger (sizes 140 ... 360)

The following gearmotors:


- sizes 140 ... 360;
- mounting positions B3, B6, B7, B8;
- helical gearmotors;
- bevel helical C2I, design UO2A, ...H, ...V, ...R (excluding the relevant versions sin);

can be equipped with **internal** and **extractable** heat exchanger, made of aluminium, finned, mounted on gear reducer inspection cover (facilitating the maintenance operations) for the water cooling of lubrication oil.

In case of gearmotors in mounting position UO2V ... UO2H the heat exchanger may not be fully extractable.



Internal heat exchanger, on gear reducer inspection cover

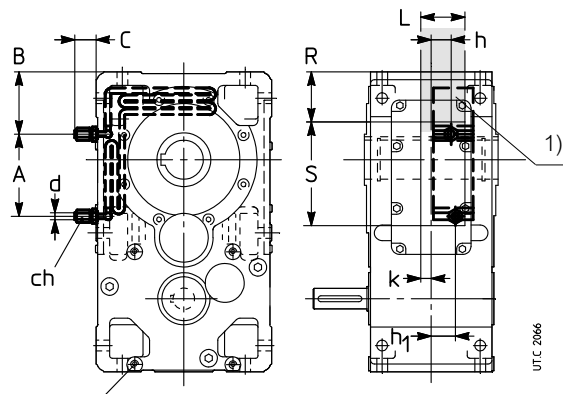

1) Free area for pipe fastening and coil fastening devices.

The value of thermal factor f_{t_b} according to size and mounting position is given in the table.

Gear reducer size	f_{t_b}			A	B	C	ch	d	h	h_1	K	L	R	S
	B3	B6, B7	B8	≈	≈			Ø						
140	1.7	1.9	1.8	30	81.5	54	22	12	32	19	16	68	60	130
160	2.12	2.36	2.24	0	102	54	22	12	20	46	16	86	77	177
180	2	2.24	2.12	0	102	54	22	12	21	47	15	86	77	177
200	2.24	2.5	2.36	190	152	25	22	12	41	41	14	75	105	263
225	2.12	2.36	2.12	190	152	25	22	12	41	41	14	75	105	263
250	2.36	2.65	2.5	180.5	170.5	25	22	12	50.5	50.5	18	100	125	311
280	2.24	2.5	2.36	180.5	170.5	25	22	12	54	54	15	100	125	311
320, 321	2.12	2.36	2.24	60	255	34	30	16	66	66	2	129	177	302
360	2	2.24	2.12	60	255	34	30	16	66	66	2	129	177	302

Cooling water specifications:

- be not too hard;
- max temperature max 68 °F (20 °C);
- capacity 2.6 – 5.2 gal/min;
- pressure 29 – 58 psi (2 – 4 bar).

A smooth metallic pipe (with external diameter **d** stated on table) is sufficient for the connection, paying attention to keep fixed the fillet using a second hexagon wrench, when fastening the pipe on the fillet.

The load loss in the internal exchanger, according to the water flow and pressure, is of 20 – 26 psi for diameter d Ø16 and 26 – 29 bar for d Ø12.

On request **thermostatic valve** which, automatically and without auxiliary supply need, permits water circulation when gear reducer oil reaches the set temperature (after technical feasibility verification, consult us); the valve sensor is equipped with immersion bulb. Mounting and setting, adjustable within 122 – 194 °F (50 – 90 °C), are Buyer's responsibility.

For ambient temperature lower than 32 °F (0 °C) consult us.

Supplementary description when ordering by **designation: independent cooling with internal exchanger.**

(18) Additional oversized housing hole for oil pipe cooling (sizes 160 ... 360)

In the event of oil cooling system through centralized external circuit (e.g.: paper plants) it is necessary to foresee an additional hole of proper dimensions on gearmotor housing in order to allow the lubricant flow for gravity.


The setting of oil flow at gearmotor input must be executed by the Customer during the installation.

The heat quantity dissipated by the system depends on oil flow and on input and output oil temperature difference.

Available only for mounting positions B3 and B8 and sizes 160 ... 360.

Threaded hole **G 2"** for sizes 160 ... 250 and **G 2 1/2"** for sizes 250 ... 360.

Supplementary description when ordering by **designation: additional oversized housing hole.**

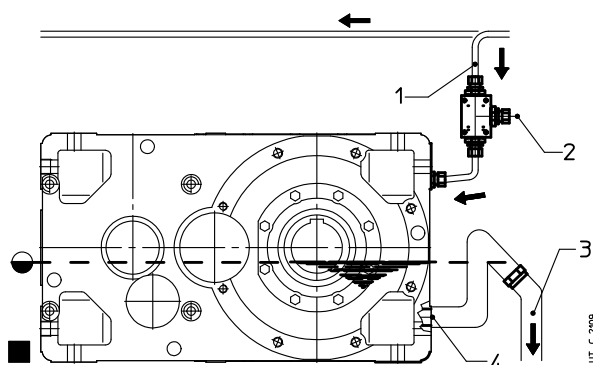

Legend:

- 1 Oil input.
- 2 Flow rate fine tuning value
- 3 Oil drain, towards centralized cooling tank
- 4 Additional oversized diameter housing hole

(19) Bearing lubrication pump (sizes 125 ... 360)

Piston pump (driven by a cam from the low speed shaft) for non oil bath lubrication.

In the following table the cases are stated where for input speed included in the range $n_1 = 1\,400 - 1\,800$ rpm it is necessary to foresee the bearing lubrication pump (see also Φ at ch. 3.7 and 3.9). For other speed values, consult us.

The other cases where according to mounting position, it could be necessary to foresee a bearing lubrication pump, are marked with symbol Φ at ch. 3.7 and 3.9; consult us.

In general, when the maximum system reliability is required, in presence of particularly heavy duty cycles or severe ambient conditions, it is necessary to evaluate the possibility to install a bearing lubrication pump; consult us.

Supplementary description when ordering by **designation: bearings lubrication pump**

Train of gears	Mounting position	Presence of lubrication pump or lubrication device $n_1 = 1\,400 \div 1\,800 \text{ min}^{-1}$				
		Gear reducer size				
		125	140 ... 180	200, 225	250, 280	320, 360
MR CI	B3, B6, B8 with Φ	P	P	P	P	-
MR C2I	B3, B6 with Φ	-	P	P	P	P

- = Bearing lubrication pump not necessary.

P = Lubrication pump.

(20) Hollow low speed shaft washer (sizes 125 ... 360)

All gearmotors can be supplied with washer, retaining ring, bolt for axial fastening and protection cap, see ch. 5.

Supplementary description when ordering by **designation: hollow low speed shaft washer**.

(22) Hollow low speed shaft protection cap (sizes 125 ... 360)

The gearmotors, sizes 125 ... 360, can be supplied with a protection cap of the hollow low speed shaft free area (see ch. 5 «Hollow low speed shaft»).

ATTENTION. The protection cannot be mounted:

- on sizes 180 ... 360 not equipped with the necessary pre-arrangement (e.g.: assembly is not possible for «aftermarket» supplies).

The protection cannot be supplied in presence of:

- double seal on low speed shaft (sizes 125 ... 160);
- labyrinth seal and greaser;

Consult us, if need be.

Supplementary description when ordering by **designation: hollow low speed shaft with protection cap**

(24) Optional paint (sizes 125 ... 360)

Gearmotors can be supplied with optional painting cycles, according to following table.

Additional description when ordering by **designation: optional paint ...** (see code stated in the table; i.e.: «**optional paint 2HRAL5010**»).

Application field	Features	Corrosivity class ISO 12944-2	Durability classes ISO 12944-2	Description	Final thickness on machined parts ISO 19840 μm	Code
Applications in aggressive environments	Good resistance to atmospheric and aggressive agents	C4	L	Dual-compound, high-thickness epoxy primer Water-based dual-compound polyacrylic enamel	≥ 160	1HRAL5010 (blue)
			M ²⁾	Dual-compound, high-thickness epoxy primer Water-based dual-compound polyacrylic enamel	≥ 180	2HRAL5010 (blue)
			H ³⁾	Dual-compound, high-thickness epoxy primer Water-based dual-compound polyacrylic enamel	≥ 240	3HRAL5010 (blue)
Outdoor applications in saline environment 1)	Excellent resistance to atmospheric and aggressive agents Outdoor applications in saline environment	C 5 ¹⁾	M	Sandblasting Zinc-rich dual-compound anti-rust primer Dual-compound, high-thickness epoxy primer Water-based dual-compound polyacrylic enamel	≥ 240	2IRAL5010 (blue) 1)
			H ²⁾	Sandblasting Zinc-rich dual-compound anti-rust primer Dual-compound, high-thickness epoxy primer Sealing with polyurethane sealant Water-based dual-compound polyacrylic enamel	≥ 280	2KRAL5010 (blue) 1)
Outdoor applications in chemically aggressive environment and high humidity industrial areas 1)	Excellent resistance to atmospheric and aggressive agents Outdoor applications in chemically aggressive environment (fertilizers, etc.)	C 5 ¹⁾	M	Sandblasting Zinc-rich dual-compound anti-rust primer Dual-compound, high-thickness epoxy primer Water-based dual-compound polyacrylic enamel	≥ 240	2LRAL5010 (blue) 1)
			H ²⁾	Sandblasting Zinc-rich dual-compound anti-rust primer Dual-compound, high-thickness epoxy primer Sealing with polyurethane sealant Water-based dual-compound polyacrylic enamel	≥ 280	2YRAL5010 (blue) 1)

1) Available for sizes ≥ 63.

2) Not available on motors.

3) For motors ,C4H possible with cycle 2H sp ≥ 180 μm.

Other colors are available on request, preferred RAL codes are as follows:

1000, 1003, 1004, 1013, 1014, 1015, 1016, 1018, 1021, 1023, 1028,
2000, 2001, 2002, 2003, 2004, 2009, 2010,
3000, 3001, 3002, 3003, 3005, 3007, 3011, 3016, 3020,
4003,
5000, 5001, 5002, 5003, 5005, 5007, 5008, 5009, 5011, 5012, 5013, 5015, 5017, 5018, 5019, 5021, 5022, 5023, 5024,
6000, 6001, 6003, 6004, 6005, 6010, 6011, 6012, 6017, 6018, 6019, 6020, 6021, 6024, 6025, 6026, 6027, 6028, 6029,
6032, 6033, 6037,
7000, 7001, 7004, 7006, 7011, 7012, 7015, 7016, 7021, 7022, 7023, 7024, 7030, 7031, 7032, 7033, 7034, 7035, 7036,
7037, 7038, 7040, 7042, 7043, 7044, 7046, 7048,
8012, 8014,
9001, 9002, 9003, 9005, 9011, 9017, 9006, 9007, 9010, 9016, 9018, 9023

(25) Heater (sizes 125 ... 360)

Oil heater for starting at low ambient temperature.

Specify the design «Oil temperature probe» together with this design.

The heater is controlled through a proper device (at customer's care e.g.: PLC or supplied by Rossi e.g. 2-threshold signalling device CT03 or 3 threshold signalling device CT10) releasing when achieving the pre-set oil temperature.


IMPORTANT. The data stated in the table refer to **mounting positions B3 and B8 only**; for other mounting positions, consult us.

The design couldn't be compatible with other designs (e.g. internal pump...), consult us.

Features:

- specific power max 2W/cm²;
- single phase or three-phase supply (see table; for other supply, consult us);
- UL recognized heating elements;
- stainless steel resistors AISI 316Ti;
- metallic terminal box; cable gland protection IP 65;
- horizontal mounting with oil bath lubrication;
- max oil temperature 194 °F (90°C);
- threaded brass joint;


Supplementary description when ordering by **designation: oil heater**.

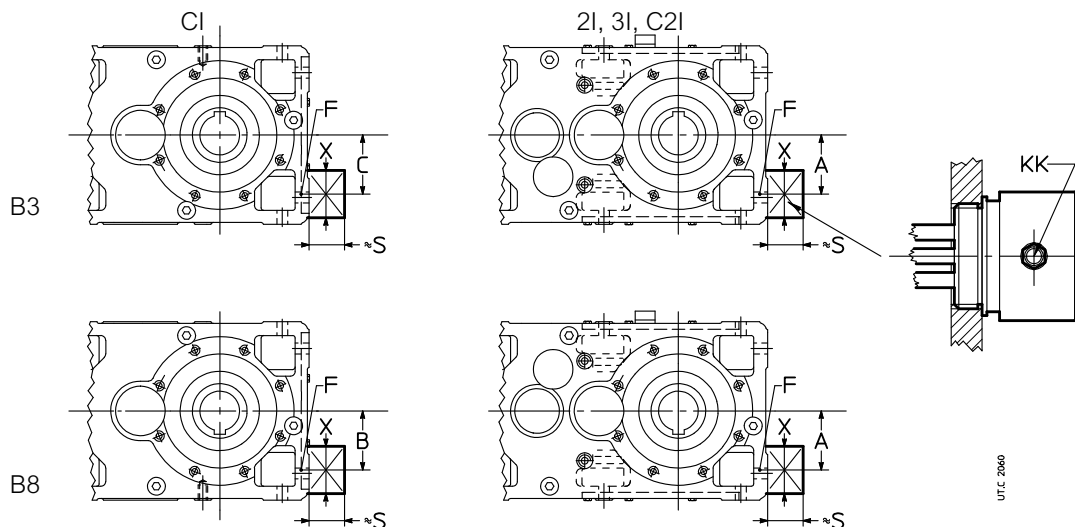

Size	A	B	C	F	L ¹⁾ ≈	S ≈	X ≈	P W	KK	Supply	
125	85	85	85	G 1"	215	85	85	300	Pg 11	1~ 230 V 50-60 Hz	
140	100	85	100	G 1" 1/4	240	600					
160	125	114	114								
180		100	125	G 1" 1/2	360	90		900	Pg 13		3~ Δ230 Y400 V 50-60 Hz
200	150	146	146								
225		140	155				G 2"	310		1500	
250	200	170	170								
280		170	235	410	2100						
320, 321	250	235	235								
360		222	318								





1) Maximum oil heater length.

Wiring schemes:

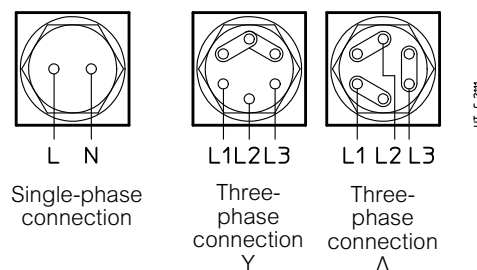

(26) Seals on high and low speed shafts (sizes 125 ... 360)

The seal types available (standard and on request) on low and high speed shaft, are stated in the following table.

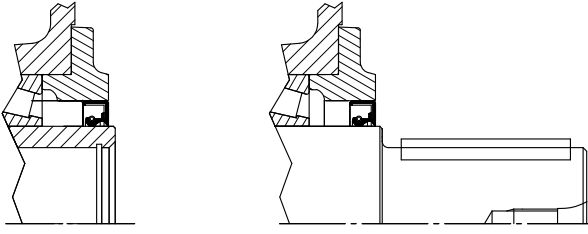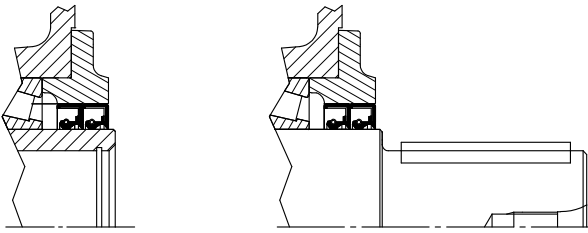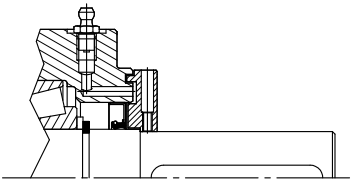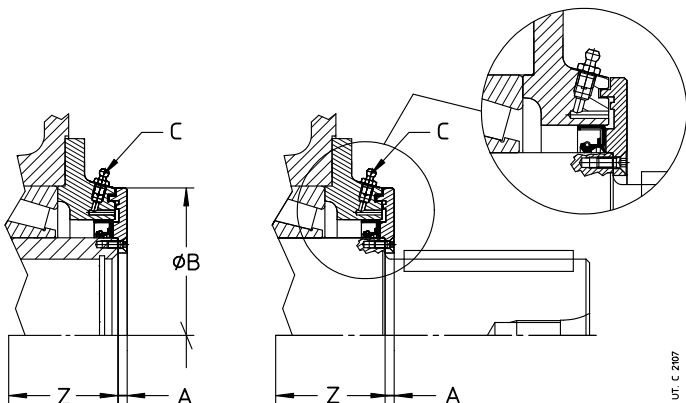Type of seal	Scheme
Standard	
High speed shaft double seal Environment is quite dirty and/or outdoor	
Low speed shaft double seal Environment is quite dirty and/or outdoor	
Labyrinth seal and high speed shaft greaser («taconite») Environment is very dirty (e.g.: mining industry)	 Additional description when ordering by designation: high speed shaft double seal. low speed shaft double seal.
Low speed shaft labyrinth seal greaser («taconite») Environment is very dirty (e.g.: mining industry) 1)	 Additional description when ordering by designation: labyrinth seal and low speed shaft greaser.

Size	A	B	C
		Ø	nr.1
125	5	138	M6
140	5	155	M6
160	6	178	M8
180	6	175	M8
200	8	195	M8
225	8	195	M8
250	8	242	M8
280	9	242	M8
320, 321	9	310	M8
360	9	310	M8

1) The labyrinth disc overhangs from A dimension compared with shaft shoulder; the length of low speed shaft end is equal to E - A.

- Notes.
- The compound of seal rings is acrylonitrilic as standard; on request, seal rings with fluoro compound are available (e.g.: for high temperatures, for aggressive environments or for high rotation speed, etc.); specify in the designation: **seal with fluoro compound**.
 - The **double seal of high speed shaft** is generally **to be avoided** as the bigger localized heating reduces the life of seal; for gearmotors the design can be supplied only on the eventual double extension high speed shaft.
 - In case of **double seal**, the external seal ring can be counter mounted (e.g. in presence of water jets); specify in the designation: **external ring counter mounted**.
 - The design **high speed shaft seal with labyrinth and greaser** can be supplied only after technical verification of feasibility by Rossi: consult us.
 - For the additional description to the **designation** when ordering, see table on the previous page.

(27) Magnetic plug (sizes 125 ... 360)

In order to reduce lubricant contamination and to increase the maintenance interval and oil replacement, gearmotors can be supplied with magnetic plug.


In presence of oil drain tap (28) the oil drain magnetic plug is mounted in a second drain hole on housing and not in the tap.

Additional description when ordering by **designation**: **oil drain magnetic plug**.

(28) Oil drain tap (sizes 125 ... 360)



Gearmotors can be supplied with oil drain tap (accessory already assembled).

Additional description when ordering by **designation**: **oil drain tap**.

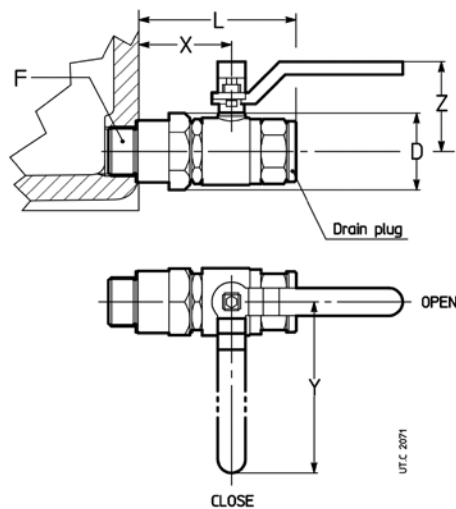

Gear reducer size	F	D Ø	L ≈	X	Y	Z
125, 140	G 1/2"	31	80	50	80	40
160 ÷ 280	G 3/4"	40	90	56	112	55
320 ÷ 360	G 1"	46	106	66	115	60

(29) Independent cooling unit

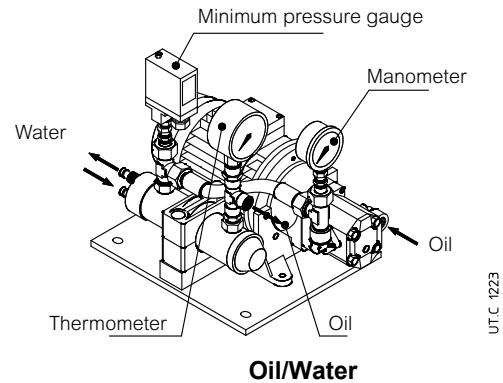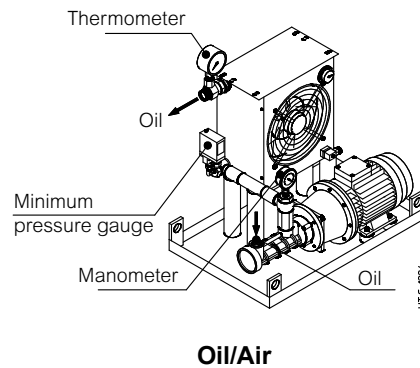

Additional cooling device in the event that the other forced cooling systems are not sufficient for the dissipation of thermal power produced by gear reducer during operation (see ch. 3.3).

Including:

- **oil/air heat exchanger** (O/A; with thermostat and adjustable control knob 32 – 194 °F (0 – 90 °C) or **oil/water heat exchanger** (O/W),
- **motor pump**: screw pump with fluoro rubber seals (gear pump for UR O/W5.4 hp – UR O/W 28 hp); 4 pole motor B3/B5; motor-pump connection with coupling;
- **motor fan** (O/A) (three-phase or single phase supply, see next table)
- **analogic manometer** 0 – 250 psi (0 – 16 bar) mounted between pump and exchanger;
- **analogic thermometer** 32 – 250 °F (0 – 120 °C) mounted at exchanger output;
- **low pressure switch** (with on-off switch) mounted between pump and exchanger;
- **supporting frame** with nameplate.

On request, several accessories are at disposal (supplied separately, assembled by Customer) in order to satisfy all functionality and safety needs.

- **oil temperature probe Pt100**;
- **2-threshold signalling device CT03** (necessary also the oil temperature probe Pt100) for the mounting on rail to DIN EN 50022;
- **3-threshold signalling device CT10** (necessary also the oil temperature probe Pt100) for the mounting on rail to DIN EN 50022;
- **bi-metal type thermostat**;
- **flow gauge**;
- **filter** (with optical-electric blockage warning and one or two filters M60)

Connections realized by flexible pipes (type SAE 100 R1, maximum length 6 ft) between gear reducer and cooling unit and the assembly of accessories and signalling devices are Buyer's responsibility.

For the heat exchanger power required by the independent cooling unit:

$$P_s \geq (P_1 - P_{t_N} \cdot ft_1 \cdot ft_2 \cdot ft_3 \cdot ft_4) \cdot (1 - \eta) \cdot K_1$$

where:

- P_s nominal power of unit [hp], i.e. the power dissipated by hot oil at approx. 176 °F (80 °C) and cooling air at 104 °F (40 °C) (O/A) or cooling water at 68 °F (20°C) (O/W) with stated capacity (see next table);
- P_1 power at gear reducer input [hp] (consider the power installed when being uncertain about the power absorbed).
- P_{t_N} nominal thermal power of gear reducer [hp] (see ch. 3.3);
- ft_1 thermal factor according to input speed (see ch.3.3);
- ft_2 thermal factor according to ambient temperature (see ch. 3.3);
- ft_3 thermal factor according to mounting position (see ch. 3.3);
- ft_4 thermal factor according to altitude (see ch. 3.3); for UR O/A derate also the exchanger power: multiply P_s by 0.85 (for 3 300 – 8 200 ft a.s.l.) or by 0.71 (for 8 200 – 16 400 ft a.s.l.);
- η gear reducer efficiency (see ch. 3.5);
- $K_1 = 1.18$ takes into account the decrease of the exchanger efficiency due to dirt on the external surface.

Notes of page 103.

- 1) Oil connection valid for UR O/A 21 hp.
- 2) Oil connections valid when filter is present.
- 3) It is advisable to delay the gear reducer motor starting by at least 1 min compared to the motor pump starting.
- 4) The oil filter requires that cooling unit is started with oil already warm: refer to case A1 or B1.

Designation	Nominal power P_s hp kW		Heat exchanger code	Oil motor pump motor flow rate 3~ hp ft ³ /min		Motor fan motor flow rate hp ft ³ /min		Oil connections intake delivery		Exchanger capacity ft ³	
UR O/A 7hp	6.7	5	AP 300 E	2	1.1	0.20	1~	1" (1 1/4") ²⁾	1" (1 1/4") ²⁾	0.07	130
UR O/A 9hp	9.4	7	AP 300/2 E	2	1.1	0.20	1~			0.13	145
UR O/A 13hp	13	10	AP 430 E	2	1.1	0.15	3~			0.13	155
UR O/A 17hp	17	13	AP 430/2 E	2	1.1	0.19	3~			0.19	165
UR O/A 21hp	21	16	AP 580 EB	3	2	0.19	3~			0.53	210
UR O/A 28hp	28	21	AP 680 EB	3	2	1.41	3~			0.57	260
UR O/A 35hp	35	26	AP 730 EB	4	2	1.41	3~	1 1/4"	1 1/2" (1") ¹⁾	0.57	280
UR O/A 40hp	40	30	AP 730 EB	4	2.8	1.41	3~			0.57	280
UR O/A 54hp	54	40	AP 830 EB	3	2	1.74	3~			0.71	310
UR O/A 62hp	62	46	AP 830 EB	4	2.8	1.74	3~			0.71	310

Designation	Nominal power P_s hp kW		Heat exchanger code	Oil motor pump motor flow rate 3~ hp ft ³ /min		Water pipe flow rate connections ft ³ /min		Oil connections intake delivery		Exchanger capacity ft ³	
UR O/W 5hp	5.4	4	T60CB1	0.5	0.6	≥ 0.3 (≤ 1.1)	Ø12 mm	G 1/2"	G 1/2"	0.01	30
UR O/W 8hp	8	6	T60CB2	0.5	0.6	≥ 0.4 (≤ 1.1)	Ø12 mm	G 1/2"	G 1/2"	0.02	35
UR O/W 12hp	12	9	T80CB2	0.75	0.6	≥ 0.6 (≤ 1.1)	Ø12 mm	G 1/2"	G 1/2"	0.04	40
UR O/W 17hp	17	13	MS84P2	1.5	1.1	≥ 0.9 (≤ 1.6)	G 1/2"	G 3/4"	G 3/4"	0.04	70
UR O/W 28hp	28	21	MS134P1	2	1.1	≥ 1.4 (≤ 3.9)	G 1"	G 3/4"	G 3/4"	0.11	95
UR O/W 42hp	42	31	MS134P1	3	2	≥ 1.8 (≤ 3.9)	G 1"	G 1 1/4"	G 1 1/4"	0.11	120
UR O/W 67hp	67	50	MS134P2	4	2.8	≥ 2.8 (≤ 3.9)	G 1"	G 1 1/4"	G 1 1/4"	0.16	155

Starting mode and required accessories

Ref.	Gear reducer lubrication system	Gear reducer starting mode	T_{amb} °F (°C)	Required accessories	Required oil type	Description and remarks
A1	Splash lubrication	Without oil pre-heating	32 – 77 (0 – 25)	Pt100 + CT10	Mineral oil or synthetic oil (preferable)	Gear reducer starting and subsequent motor-pump starting with warm oil. The motor-pump is managed by the three-threshold oil temperature control system (Pt100 + CT10). Set the three-threshold device CT10 with: – operating temperature 140 °F (60 °C) (starting of motor-pump); – restoring temperature 104 °F (40 °C); – warning temperature 194 °F (90 °C).
A2	Splash lubrication	Without oil pre-heating	> 77 (> 25)	–	Polyalphaolefine based synthetic oil	Simultaneous starting of gear reducer and motor-pump Oil filter not possible ⁴⁾ .
B1	Forced lubrication (bearings and/or gears)	With oil pre-heating	32– 77 (0 – 25)	Pt100 + CT03 Pt100 + CT10 Oil heater	Mineral oil or synthetic oil (preferable)	Simultaneous starting of gear reducer and motor-pump after oil pre-heating³⁾. The oil heater is managed by the two-threshold oil temperature control system (Pt100 + CT03). The motor-pump and the gear reducer motor are managed by the three-threshold oil temperature control system (Pt100 + CT10). Set the two-threshold device CT03 with: – operating temperature 122 °F (50 °C) (oil heater disconnection); – restoring temperature 86 °F (30 °C). Set the three-threshold device CT10 with: – operating temperature 104 °F (40 °C) (starting of motor-pump and gear reducer motor); – restoring temperature 50 °F (10 °C); – warning temperature 194 °F (90 °C).
B2	Forced lubrication (bearings and/or gears)	Without oil pre-heating	> 77 (> 25)	–	Polyalphaolefine based synthetic oil	Simultaneous starting of gear reducer and motor-pump³⁾ Oil filter not possible ⁴⁾ .

see notes on page 102.

Additional description when ordering by **designation**:

independent oil-air cooling unit UR O/A ... or **independent oil-water cooling unit UR O/W ...**, possibly integrated, when required by the application, with description: «**Forced lubrication ...**» and the statement of bearings and/or gear pairs to be lubricated. For dimensions, accessories and further technical details, see specific literature.

(30) Oil temperature probe (sizes 125 ... 360)

Remote oil temperature gauge; installation (at Buyer's responsibility) instead of an existing drain plug, or into a hole properly pre-arranged. The temperature gauge is realized with a thermo-resistor Pt100 having following features:


- platinum wire with 100 Ω at 32 °F (0 °C) according to EN 60751;
- precision class B according to EN 60751;
- operation temperature field -40 °F – +392 °F (-40 °C – +200 °C);
- max current 3 mA;
- 3 wires connection according to IEC 751 (see fig. below);
- stainless steel probe AISI 316; diameter 6 mm;
- cable 1 m long with free end.

For the connection of probe to relevant signalling device CT03 or CT10 (on request, consult us) use a protected section cable $\geq 1.5 \text{ mm}^2$ positioned separately from power cables.

Supplementary description when ordering by **designation: oil temperature probe.**

Red Red White
Pt100

Gear reducer size	B	Ch (key)	D
125, 140	8	22	G 1/2"
160 ... 225	10	32	G 3/4"
320 ... 360	15	36	G 1"

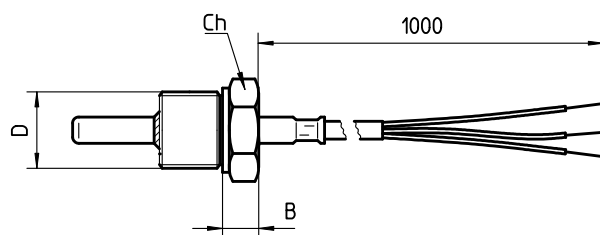

UTC 2103

(31) Oil temperature probe with terminal box and amperometric transducer 4 – 20 mA (sizes 125 ... 360)


Remote oil temperature gauge, with terminal box and amperometric transducer; installation (at Buyer's responsibility) instead of drain plug. The temperature gauge is realized with a thermo-resistor Pt100 having following features:

- platinum wire with 100 Ω at 32 °F (0 °C) according to EN 60751;
- precision class B according to EN 60751;
- temperature range -40 °F – +392 °F (-40 °C – +200 °C);
- 3 wires connection according to IEC 751 (see fig. below);
- stainless steel probe AISI 316; diameter 6 mm;
- amperometric transducer with output signal 4 – 20 mA;
- aluminium terminal block (supplied without cable gland);
- protection IP65;
- input cables G 1/2".


For the connection of probe to relevant signalling device use a protected section cable $\geq 1.5 \text{ mm}^2$ positioned separately from power cables.

ATTENTION. Accessory available only for technical feasibility evaluation by Rossi: consult us.

Supplementary description when ordering by **designation: oil temperature probe with terminal box and amperometric transducer.**



Gear reducer size	B	Ch (key)	b	D
125, 140	90	24	60	G 1/2"
160 ... 280	92	32	62	G 3/4"
320 ... 360	97	36	67	G 1"

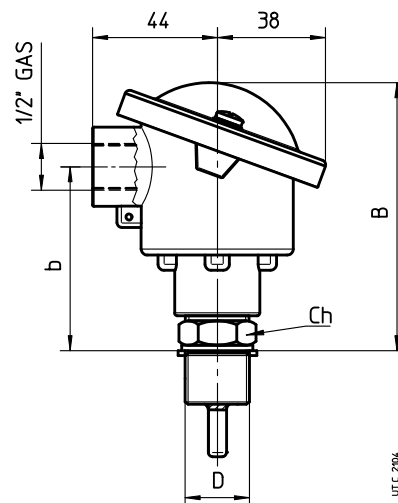

(32) Bearing temperature probe (sizes 125 ... 360)

Probe for the remote monitoring of bearing temperature; installation (at Buyer's responsibility) into a hole properly pre-arranged, next to a bearing to **be agreed during order phase** (for the most common cases, in order to facilitate the identification of bearing to be monitored, refer to following scheme).


The temperature gauge is realized with a thermo-resistor Pt100 having following features:

- platinum wire with 100 Ω at 32 °F (0 °C) according to EN 60751;
- precision class B according to EN 60751;
- temperature range -40 °F – +392 °F (-40 °C – +200 °C);
- max current 40 mA;
- 3 wire connection according to IEC 751 (see fig. below);
- stainless steel AISI 316 flat probe; diameter 6 mm;
- stainless steel **sliding** fillet.


For gearmotors, positions A1 and A2 not available.

For the connection of probe to relevant signalling device CT03 or CT10 (on request, consult us) use a protected section cable $\geq 1.5 \text{ mm}^2$ positioned separately from power cables.


Supplementary description when ordering by **designation: bearing temperature probe**.

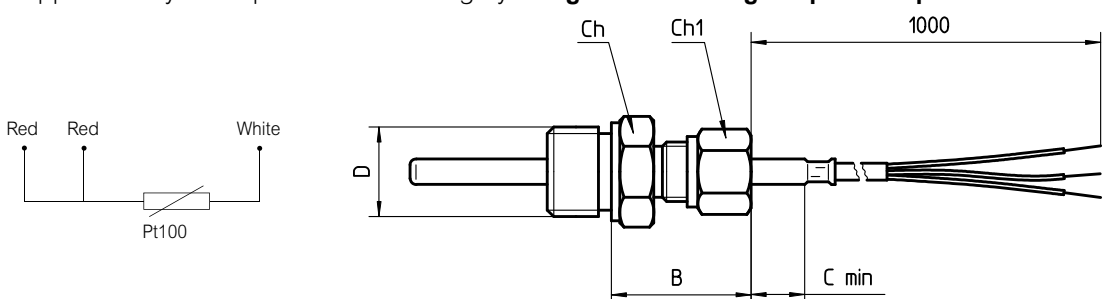


Gear reducer size	C _{min}	B	Ch (key)	Ch1 (key)	D
125 ... 360	5	32	24	17	G 1/2"




2I ... UP2A



3I ... UP2A



CI ... UO2A (UO2V)



C2I ... UO2A (UO2V)

(33) Bearing temperature probe with terminal box and amperometric transducer 4 – 20 mA (sizes 125 ... 360)

Probe for remote bearing temperature monitoring, with terminal box and amperometric transducer; installation (at Buyer's responsibility) in a threaded hole properly pre-arranged next to a bearing **to be agreed when ordering** (for the most common cases, in order to facilitate the identification of the bearing to be monitored, it is possible to refer to the scheme at (32)).


The temperature gauge is realized with a thermo-resistor Pt100 having following features:

- platinum wire with 100 Ω at 32 °F (0 °C) according to EN 60751;
- precision class B according to EN 60751;
- temperature range -40 °F – +392 °F (-40 °C – +200 °C);
- 3 wire connection according to IEC 751 (see fig. below);
- amperometric transducer with output signal 4 – 20 mA;
- alluminium terminal block (supplied without cable gland);
- protection IP65;
- input cables G 1/2";
- stainless steel AISI 316 flat probe; diameter 6 mm;
- stainless steel **sliding** fillet.


For the connection of probe to relevant signalling device use a protected section cable $\geq 1.5 \text{ mm}^2$ positioned separately from power cables.

For gearmotors, positions A1 and A2 not available.

Supplementary description when ordering by **designation**: bearing temperature probe with **amperometric transducer**.



Gear reducer size	B	b	Ch (key)	Ch1 (key)	D
125 ... 360	134	104	24	17	G 1/2"

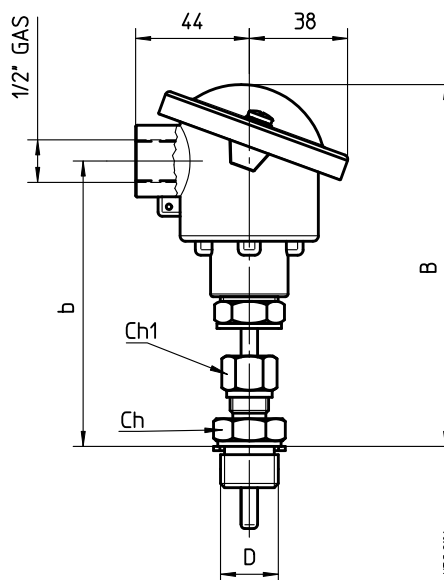

(34) Bi-metal type thermostat (sizes 125 ... 360)

Gearmotors sizes 125 ... 360 can be supplied with bimetal type thermostat for the control of the maximum admissible oil temperature.


Thermostat specifications:

- NC contact with maximum alternate current 10 A - 240 V d.c. (5 A - 24 V d.c.);
- G 1/2" thread connection;
- Pg 09 DIN 43650 cable gland;
- IP65 protection;
- Setting temperature $194 \pm 9^\circ\text{F}$ ($90 \pm 5^\circ\text{C}$)
(other setting temperatures are possible, on request);
- Differential temperature 27°F (15°C).

Mounting into a threaded hole (position to be defined according to mounting position and mounting arrangement: consult us) and oil bath lubrication is Buyer's responsibility.

ATTENTION. Accessory available only for technical feasibility evaluation by Rossi: consult us.

Supplementary description when ordering by **designation: bimetal type thermostat.**

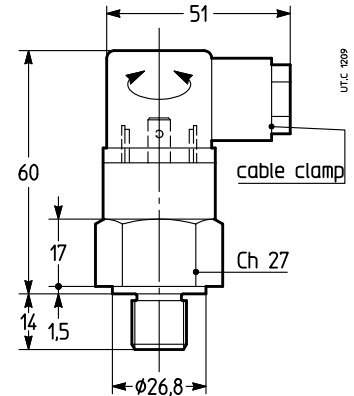

(35) Oil level switch with float (sizes 125 ... 360)

It is a level control device with reed contacts in a supporting stem moved by the magnetic field activated by the magnets included in the float.

The float and the supporting stem are included in a hollow column of non-magnetic material connected to the gear reducer housing through communicating vessels.

Connecting features:


- 2 wires connection;
- maximum voltage: 350 V
- maximum current: 1.5 A
- 1 cable input 1/2" ISO 7/1 – IP65
- G 1" brass joint.

The switch is supplied ready for use; when level goes down approx 5 mm, the switch goes on and contact opens.

When filling oil in the gear reducer it is necessary to verify that device is properly calibrated. If any problems occur during this operation contact Rossi.

ATTENTION. Accessory available only for technical feasibility evaluation by Rossi: consult us.

Supplementary description when ordering by **designation: oil level switch with float**





(36) Oil optical probe (sizes 125 ... 360)

Optical scanner, without moving parts, for the constant control of oil level, inside the gear reducer (at rest).

Features:

- stainless steel probe;
- operating temperature range -40°F – $+257^\circ\text{F}$ (-40°C – $+125^\circ\text{C}$);
- d.c. supply 12 – 28 V (other types on request, consult us);
- PNP output (other types on request, consult us), max 100 mA;
- male coupling G 3/8", G 1/2", G 3/4", G 1" according to gear reducer size.

Supplementary description when ordering by **designation: oil optical probe.**

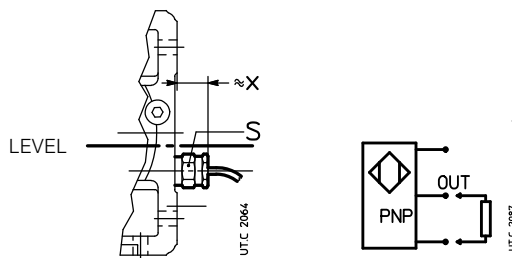

Gear reducer size	S	x
125... 140	27	40
160 ... 360	36	45


(39) Solid low speed shaft with inch diameter (sizes 125 ... 360)

Gearmotors sizes 125 ... 360 can be equipped with solid low speed shaft with inch diameter; shaft end can be on opposite to groove side, on groove side or on both (double extension).

For sizes 225, 280 and 360 radial loads (ch.3.10) are to be multiplied by 0.4.

For the bore of parts keyed onto shaft end the D tolerance $+0.0015 / -0.0000$ is suggested provided that the load is uniform or with moderate overloads and without reversals; otherwise an interference fit should be taken into account; consult us. Before mounting, clean carefully and lubricate mating surfaces against seizure and fretting corrosion.

Installing and removal operations should be carried out with **pullers** and **jacking screws** using the tapped hole at the shaft butt-end; for interference fits it is advisable that the part to be keyed is preheated to a temperature of 176 – 212 °F (80 – 100 °C).

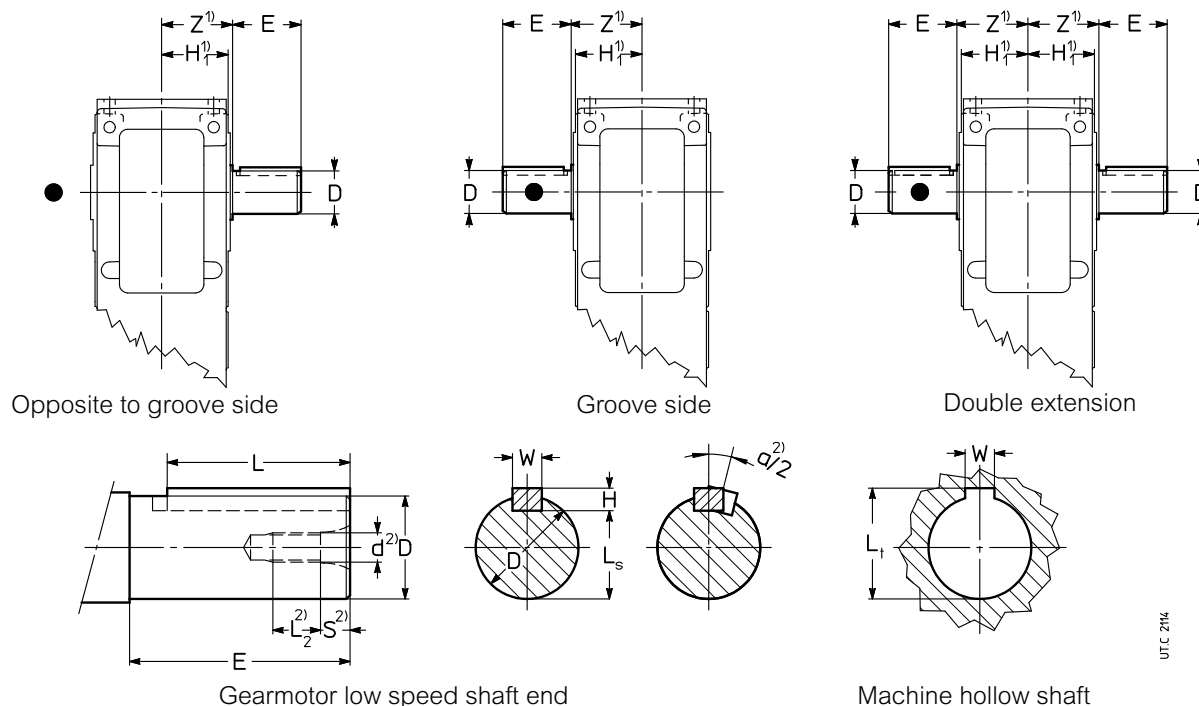

Gear reducer size	Shaft end		Key ³⁾			Keyway ³⁾		
	D ⁺ in	E mm	W in	H in	L in	W in	Ls in	Lt in
125	2.375 ^{2 3/8}	105	0.625 ^{+0.0000 -0.0020}	0.625 ^{+0.0000 -0.0020}	3.625	0.625 ^{+0.0030 -0.0000}	2.021	2.651
140	2.875 ^{2 7/8}	105	0.75 ^{+0.0000 -0.0020}	0.75 ^{+0.0000 -0.0020}	3.625	0.75 ^{+0.0030 -0.0000}	2.450	3.205
160	3.25 ^{3 1/4}	130	0.75 ^{+0.0000 -0.0020}	0.75 ^{+0.0000 -0.0020}	4.5	0.75 ^{+0.0030 -0.0000}	2.831	3.586
180	3.625 ^{3 5/8}	130	0.875 ^{+0.0000 -0.0030}	0.875 ^{+0.0000 -0.0030}	4.375	0.875 ^{+0.0030 -0.0000}	3.134	4.014
200	4.375 ^{4 3/8}	165	1 ^{+0.0000 -0.0030}	1 ^{+0.0000 -0.0030}	5.5	1 ^{+0.0030 -0.0000}	3.817	4.822
225	4.75 ^{4 3/4}	165	1.25 ^{+0.0000 -0.0030}	1.25 ^{+0.0000 -0.0030}	5.375	1.25 ^{+0.0040 -0.0000}	4.041	5.296
250	5 ⁵	200	1.25 ^{+0.0000 -0.0030}	1.25 ^{+0.0000 -0.0030}	6.75	1.25 ^{+0.0040 -0.0000}	4.296	5.551
280	6.25 ^{6 1/4}	200	1.5 ^{+0.0000 -0.0030}	1.5 ^{+0.0000 -0.0030}	6.75	1.5 ^{+0.0040 -0.0000}	5.409	6.914
320, 321	7.5 ^{7 1/2}	240	1.75 ^{+0.0000 -0.0050}	1.5 ^{+0.0000 -0.0050}	8	1.75 ^{+0.0040 -0.0000}	6.646	8.151
360	8 ⁸	240	2 ^{+0.0000 -0.0050}	1.5 ^{+0.0000 -0.0050}	8	2 ^{+0.0040 -0.0000}	7.123	8.628

• Position of the reference groove (see ch. 3.5).

1) For Z and H₁ dimension refer to ch. 3.7 and 3.9.

2) For threaded hole and max key angular misalignment refer to ch. 3.5 «High and low speed shaft end».

3) According to ANSI B17.1.

Supplementary description when ordering by designation: **solid low speed shaft with inch diameter** followed by **opposite to groove side** or **groove side** or **double extension**.


4.2 - Miscellaneous

Gearmotors

- Design with **2nd motorization** with identical speed (**same** or different direction of rotation) or **reduced** (same direction of rotation, free-wheel coupling) (see picture);



- Fitting with key, bronze bushing and shrink disc of CI, C2I trains of gears or motor size $\leq$ N320TC;
- Semi-flexible and hydrodynamic couplings;
- Pre-arranged for bearing and gear forced lubrication.

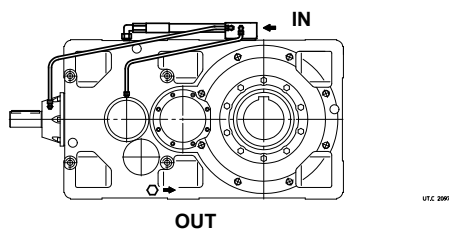


Driving group complete of base - motor, coupling, brake if any, second drive for shaft - mounting arrangements.



Installation and maintenance



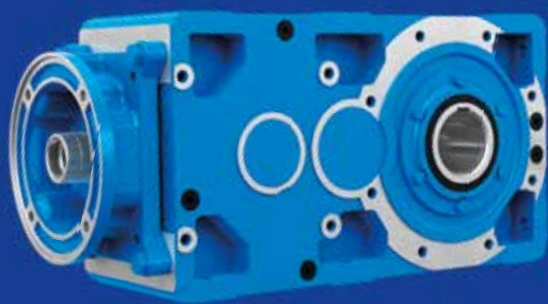

Section content

5.1	Safety	122
5.2	Generals	122
5.3	Shaft end of driven machine	123
5.4	Fitting of components to shaft end	123
5.5	Hollow low speed shaft	123
5.6	Lubrication	124
5.7	Motor assembly and disassembly	125
5.8	Shaft mounting arrangements	126
5.9	Fastening bolt dimensions for gear reducer feet	130
5.10	Tightening torque	130

5.1 - Safety

IMPORTANT: gear reducers and gearmotors supplied by Rossi are **components** to be incorporated into machinery and **should not be commissioned before the machinery in which the components have been incorporated conforms to:**

- Machinery directive 2006/42/EC and subsequent updatings; in particular, possible safety guards for shaft ends not being used for eventually accessible fan cover passages (or other) are the Buyer's responsibility;
- «Electromagnetic compatibility (EMC)» 2004/108/EC and subsequent updatings.

Attention! It is recommended to pay attention to all instructions of present catalog, all standards concerning correct installation and all existing safety laws. Whenever personal injury or property damage may occur, foresee adequate supplementary protection devices against:

- release or breakage of fastening screws;
- rotation or unthreading of the gear reducer from shaft end of driven machine following to accidental breakage of the reaction arrangement;
- accidental breakage of shaft end of driven machine.

If deviations from normal operation occur (temperature increase, unusual noise, etc.) immediately switch off the machine.

Installation

An incorrect installation, an improper use, the removing or disconnection of protection devices, the lack of inspections and maintenance, improper connections may cause severe personal injury or property damage. Therefore the component must be moved, installed, commissioned, handled, controlled, serviced and re-paired **exclusively by responsible qualified personnel specifically instructed** and have the experience necessary to **recognize** and prevent **dangers** connected to present products avoiding all possible emergencies.

Gear reducers and gearmotors of present handbook are normally suitable for installations in **industrial areas**; **additional protection** measures, if necessary, must be adopted and assured by the personnel responsible for the installation.

Attention! Components in non-standard design or with special executions or with constructive variations may differ in the details from the ones described here following and may require additional information.

Attention! For the installation, use and maintenance of the **electric motor** or of the eventual motor variator and/or electric supply device (frequency converter, soft-start etc.), and/or optional electric devices (e.g.: independent cooling unit, etc.), consult the attached specific documentation. If necessary, require it.

Maintenance


When operating on gear reducer or on components connected to it the **machine** must be **at rest**: disconnect motor (including auxiliary equipments) from power supply, gear reducer from load, be sure that safety systems are on against any accidental starting and, if necessary, pre-arrange mechanical locking devices (to be removed before commissioning).

Attention! During the running the gear reducers could have **hot surfaces**; always wait that the gear reducer or the gearmotor to cool before carrying out any operations.

Please download further technical documentation from our website www.rossi.com.

5.2 - Generals

Be sure that the structure on which gearmotor is fitted is plane, levelled and sufficiently dimensioned in order to assure fitting stability and vibration absence, keeping in mind all transmitted forces due to the masses, to the torque, to the radial and axial loads.



Position the gearmotor so as to allow a free passage of air for cooling both gearmotor (especially at gear reducer and motor fan sides).

If there is fan on the gearmotor verify that there is sufficient space allowing an adequate circulation of cooling air also after fitting coupling protection. If a coupling protection is fitted, smooth the coupling hub, if necessary.

Avoid: any obstruction to the air-flow; heat sources near the gearmotor that might affect the temperature of cooling-air and of gear reducer for radiation; insufficient air recycle or any other factor hindering the steady dissipation of heat.

Mount the gearmotor so as not to receive vibrations.

When external loads are present use pins or locking blocks, if necessary.

When fitting gearmotor and machine and/or gearmotor and eventual flange **B5** it is recommended to use **locking adhesives** such as LOCTITE on the fastening screws (also on flange mating surfaces).

For outdoor installation or in a hostile environment protect the gearmotor with anticorrosion paint. Added protection may be afforded by water-repellent grease (especially around the rotary seating of seal rings and the accessible zones of shaft end).

Gearmotors should be protected wherever possible, and by whatever appropriate means, from solar radiation and extremes of weather; weather protection **becomes essential** when high or low speed shafts are vertically disposed, or where the motor is installed vertical with fan uppermost.

For ambient temperatures greater than 104 °F (40 °C) or less than 32 °F (0 °C), consult us.

Before wiring-up the gearmotor, make sure that motor voltage corresponds to input voltage. If direction of rotation is not as desired, invert two phases at the terminals. Star-delta starting should be adopted for starting on no load (or with a very small load) and/or when the necessity is for smooth starts, low starting current and limited stresses.

If overloads are imposed for long periods or if shocks or danger of jamming are envisaged, then motor-protection, electronic torque limiters, fluid couplings, safety couplings, control units or other similar devices should be fitted.

Usually protect the motor with a thermal cut-out; however, where duty cycles involve a high number of on-load starts, it is necessary to utilise thermal probes for motor protection (fitted on the wiring); thermal cut-out is unsuitable since its threshold must be set higher than the motor nominal current of rating.

Connect thermal probes, if any, to auxiliary safety circuits.

Use varistors to limit voltage peaks due to contactors.

Attention! Bearing life, good shaft and coupling running depend on alignment precision between the shafts. Carefully align the gear reducer with the motor and the driven machine (with the aid of shims if need be), interposing flexible couplings whenever possible.

Whenever a leakage of lubricant could cause heavy damages, increase the frequency of inspections and/or envisage appropriate control devices (e.g.: remote oil level gauge, lubricant for food industry, etc.).

In polluting surroundings, take suitable precautions against lubricant contamination through seal rings or other.

Gearmotors should not be put into service before it has been incorporated on a machine which is conform to 2006/42/EC directive.

For brake or special motors, consult us for specific information.

5.3 - Shaft end of driven machine


Recommended dimensions at ch. 3.5 on page 32.

5.4 - Fitting of components to high speed second shaft end

Recommended dimensions at ch. 3.5 on page 32.

5.5 - Hollow low speed shaft

In order to remove the hollow low speed shaft (this is the first operation to perform when disassembling the gearmotor) turn the shaft until the keyway is facing the intermediate shaft, as shown in the drawing alongside, and push the shaft from the reference groove side (see ch. 3.5).



UT C 302

In order to have an easier **installing and removing** of gearmotors with retaining ring groove proceed as per the drawings a, b, respectively.

For the axial fastening it is possible to adopt the system as per fig. c. When shaft end of driven machine has no shoulder, a spacer may be located between the retaining ring and the shaft end itself (as in the lower half of the fig. c)



A **washer** for gearmotors installing, removing and gearmotor axial fastening and hollow low speed shaft **protection cap** can be supplied on request.

Parts in contact with retaining ring, if any, must have sharp edges.



Whenever personal injury or property damage may occur, **foresee adequate supplementary protection devices** against:

- rotation or unthreading of the gearmotor from shaft end of driven machine following to accidental breakage of the reaction arrangement;
- accidental breakage of shaft end of driven machine.

Size	125	140	160
s_{max}	9	9	11

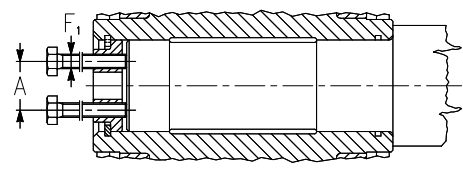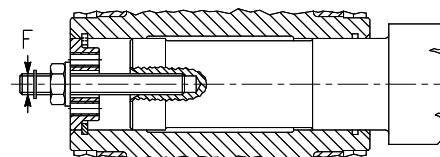

UT C 302

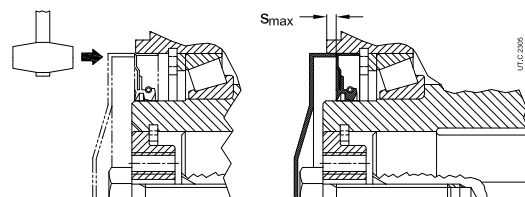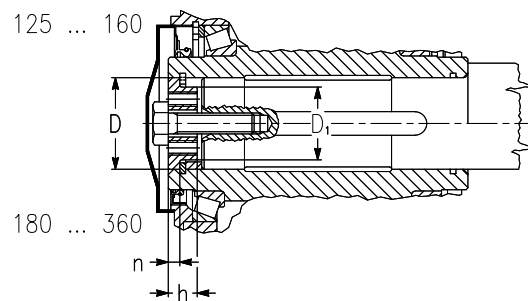

UT C 302

For sizes 125 ... 160, the hollow speed shaft protection cap must be keyed into seal ring seat that, for this reason, must be pushed towards gearmotors inside for the maximum depth stated in the table.

For this operation use the protection cap as a tool, hammering it carefully along the periphery (see fig. above).

Gear reducer size	A	D Ø in	D ₃ Ø	F	F ₁	h	n	Axial fastening bolt UNI 5737-8.8
125	30	2.375	45	M14	M10	16	7	M14x45
140	36	2.75	54	M16	M12	19	8	M16x50
160	45	3.25	65	M20	M12	19	8	M20x60
180	49	3.625	74	M20	M16	23	9	M20x60
200	56	4	83	M24	M16	23	10	M24x70
225	64	4.25	89	M24	M16	24	10	M24x70
250	72	5	104.5	M30	M20	28	11	M30x90
280	87	5.5	117	M30	M20	30	12	M30x90
320, 321	97	6.25	133.5	M36	M24	33	13	M36x110
360	117	7	153	M36	M24	36	14	M36x110

5.6 - Lubrication

Gear pairs are oil-bath lubricated «for life» with grease (SHELL Gadus S5). Bearings are either oil-bathed or splashed with the exception of the top bearings which are lubricated with a pump (see ch. 17(4)) or lubricated «for life» with grease (with or without NILOS ring according to speed).

Sizes 125 ... 360

The gearmotors are supplied **without oil**; before putting into service, fill to the specified level¹⁾, with **mineral oil** having the ISO viscosity grade given in the table.

When it is required to increase oil change interval («long life»), the ambient temperature range and/or reduce oil temperature, use **synthetic oil** with polyalphaolefines basis having ISO viscosity grade as indicated in the table.

1) Lubricant quantities stated on ch. 3.6, 3.8 are approximate for provisioning.

The exact oil quantity the gear reducer is to be filled with is definitely given by the level.

ISO viscosity grade

Mean kinematic viscosity [cSt] at 104 °F (40 °C).

Speed n_2 rpm	Ambient temperature ¹⁾		
	mineral oil	synthetic oil	
	32 – 68 °F (0 – 20 °C)	50 – 104 °F (10 – 40 °C)	32 – 104 °F (0 – 40 °C)
> 224	150	150	150
224 – 22.4	150	220	220
22.4 – 5.6	220	320	320
< 5.6	320	460	460

1) Peaks of 18 °F (10 °C); 36 °F (20 °C) for synthetic oil below and 18 °F (10 °C) above the ambient temperature range are acceptable.

Oil types

Manufacturer	PAO synthetic oil	mineral oil
	ISO VG 150 ... 460	ISO VG 150 ... 460
AGIP	Blasia SX	Blasia
ARAL	Degol PAS	Degol BG
BP	Energol EPX	Energol GR XP
CASTROL	Alphasyn EP	Alpha SP
FUCHS	Renolin Unisys CLP	Renolin CLP
KLÜBER	Klübersynth GEM4	Klüberoil GEM1
MOBIL	Mobil SHC Gear	Mobilgear 600 XP
SHELL	Omala S4 GX	Omala S2 G
TEXACO	Pinnacle	Meropa
TOTAL	Carter SH	Carter EP

For continuous duty, the use of synthetic oil is recommended for:

- gearmotors with size and mounting positions marked with  (see ch. 3.7 and 3.8).

An overall guide to oil-change interval is given in the table, and assumes pollution-free surroundings. When heavy overloads are present, halve the values.

Oil temperature		Oil change interval [h]	
°F	°C	mineral oil	synthetic oil
≤ 149	≤ 65	8 000	25 000
149 – 176	65 – 80	4 000	18 000
176 – 203	80 – 95	2 000	12 500
203 – 230 ¹⁾	95 – 110 ¹⁾	—	9 000

1) Values admissible for not continuous duty, only.

Apart from the running hours:

– replace the mineral oil at least each 3 years;
– replace or regenerate the synthetic oil at least each 5 - 8 years, according to gearmotor size, running and environmental conditions.

Never mix different makes of synthetic oil; if oil-change involves switching to a type different from that used previously, then give the gear reducer a thorough clean-out.

Seal rings

Duration depends on several factors such as dragging speed, temperature, ambient conditions, etc.; as a rough guide it can vary from 3 150 to 25 000 h.

Filler plug

For gearmotors, before unscrewing the filler plug with valve (symbol ) wait until the unit has cooled and then open with caution.

5.7 - Motor assembly and disassembly

Gearmotors with NEMA standard motor keyed onto hollow high speed shaft of gearmotor

- be sure that the mating surfaces are machined under accuracy rating (IEC 60072-1);
- clean surfaces to be fitted thoroughly;
- lubricate surfaces to be fitted against fretting corrosion;
- some combinations of gearmotors require a non-standard key: this key is supplied together with the gearmotor; in case, replace the motor key with the one supplied; if necessary, check the key so that between its top and the bottom of the hub keyway there is a backlash of 0.1 - 0.2 mm; in case of a slot keyway on the motor shaft, lock the key by pins;
- bevel helical gearmotors in combination with motor size $\geq$ N320TC are equipped with a bronze bushing to facilitate installation and removal and to avoid fretting corrosion; in these cases, remove the key from the motor shaft; mount the bush on the motor shaft by pushing it against the shaft shoulder (there must be a slight interference, if necessary arrange with fine grain sandpaper); grease the external part with MOLIKOTE BR 2 PLUS grease (or similar); apply LOCTITE 221 mastic (or similar) on the sides of the key; fit to the gearmotor input side.

Helical gearmotors for NEMA motors size $\geq$ N320 TC are equipped with **hub clamp**.

For the mounting:

- Turn the hub clamp until the fastening screw head is aligned with one of the access holes on gear reducers flange, after having removed the relevant closure plugs;
- do not modify the axial position of the hub clamp supplied from workshop, as this position is the excellent one in order to achieve the maximum tightening effect;
- push the motor up to shoulder;
- tighten the motor fastening screws or nuts to gear reducer motor flange;
- complete the tightening with dynamometric wrench up to the tightening torque stated in the table; during this operation pay attention not to modify the axial position of hub clamp;
- screw again the closure plugs of access holes to gear reducer flange;

For the disassembly, proceed as follows:

- acting on motor shaft rear end, whenever possible, or disconnecting the gear reducer from machine and acting on gear reducer low speed shaft, align the wrench hole with the tightening screw of hub clamp;
- loosen the tightening screw and consequently the hub clamp (taking care not to modify the axial position of hub clamp);
- unscrew the motor fastening screws or nuts to gear reducer flange;
- disassemble the motor.

Gear reducer size		Screw ANSI B18.3	M_s lb in
2I	3I		
160 ... 225	200, 225	1/2" - 13 x 1"3/4	1265
250 ... 360	250 ... 360	5/8" - 11 x 2"	2436


5.8 - Shaft mounting arrangements

The strength and shape of the housing offer advantageous possibilities for shaft mounting (for several reaction arrangements which can be supplied, see ch. 4 «Shaft mounting arrangements»).


A few shaft mounting arrangements are shown here with the relative details as to selection, and installation.

IMPORTANT: When shaft mounted, the gearmotor must be supported both axially and radially (even for mounting positions B3 ... B8) by the shaft end of driven machine, as well as anchored against rotation only, by means of a reaction having **freedom of axial movement** and sufficient clearance in its couplings to permit minor oscillations - always in evidence - without provoking dangerous overloads on the gearmotor. Lubricate with proper products the hinges and the parts subject to sliding; when tightening the screws it is recommended to apply locking adhesives type LOCTITE 601.


In case of shaft-mounting arrangement with elastic constraint, for trains of gears C 2l, 2l, 3l in B3 or B8 mounting position, ensure that the housing oscillation, during the running, not overtake - towards the top - the horizontal position.

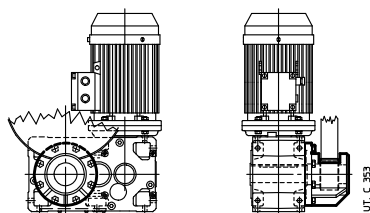

Semi-flexible and economic **reaction arrangement, using disc springs**. Safety devices may be installed to prevent accidental overloads.

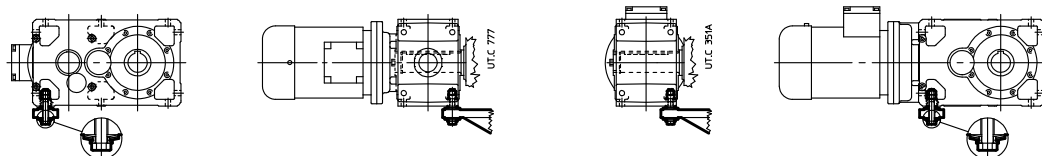


Semi-flexible reaction arrangement, **using disc springs and bracket**

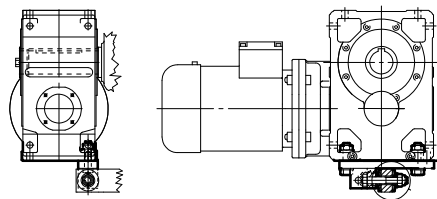


Rigid torque arm arrangement for variable distance anchorage (ch. 4).

If the direction of rotation is opposite to that given in the fig. rotate the torque arm by 180°.

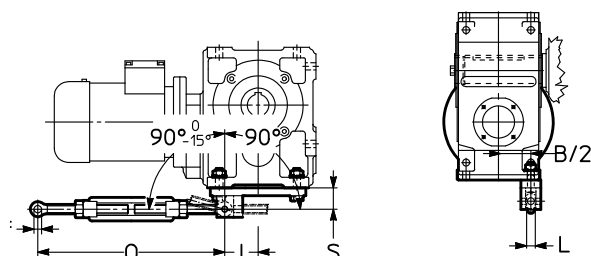

Reaction arrangement see above (ch. 4), but **flexible**; safety devices may be installed to prevent accidental overloads. The flexible torque arm may be turned through 180° regardless of direction of rotation.

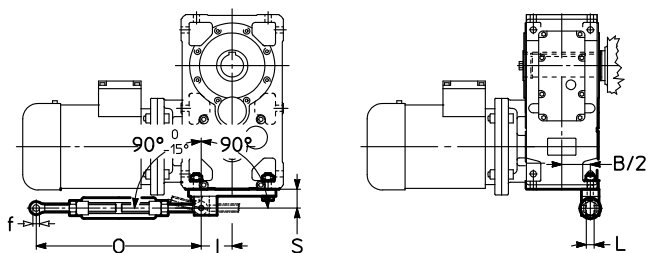


Flexible reaction arrangement using **rubber buffers** (drawings are approximate, but the buffers will be positioned abutting with gear reducer housing). It is possible to install safety devices against accidental overloads.




For the majority of normal cases, where weight force G is parallel or orthogonal to reaction R_R as illustrated in the drawings, reactions are calculated thus (verify the worst condition) valid for long model too, if applicable:

Helical gear units

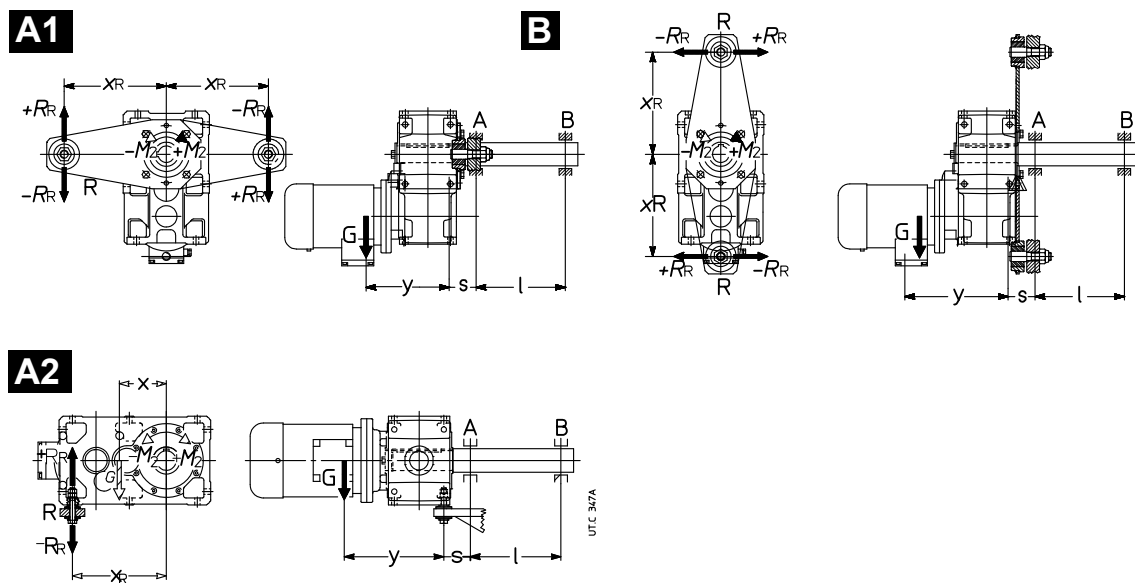

Bevel helical gear units

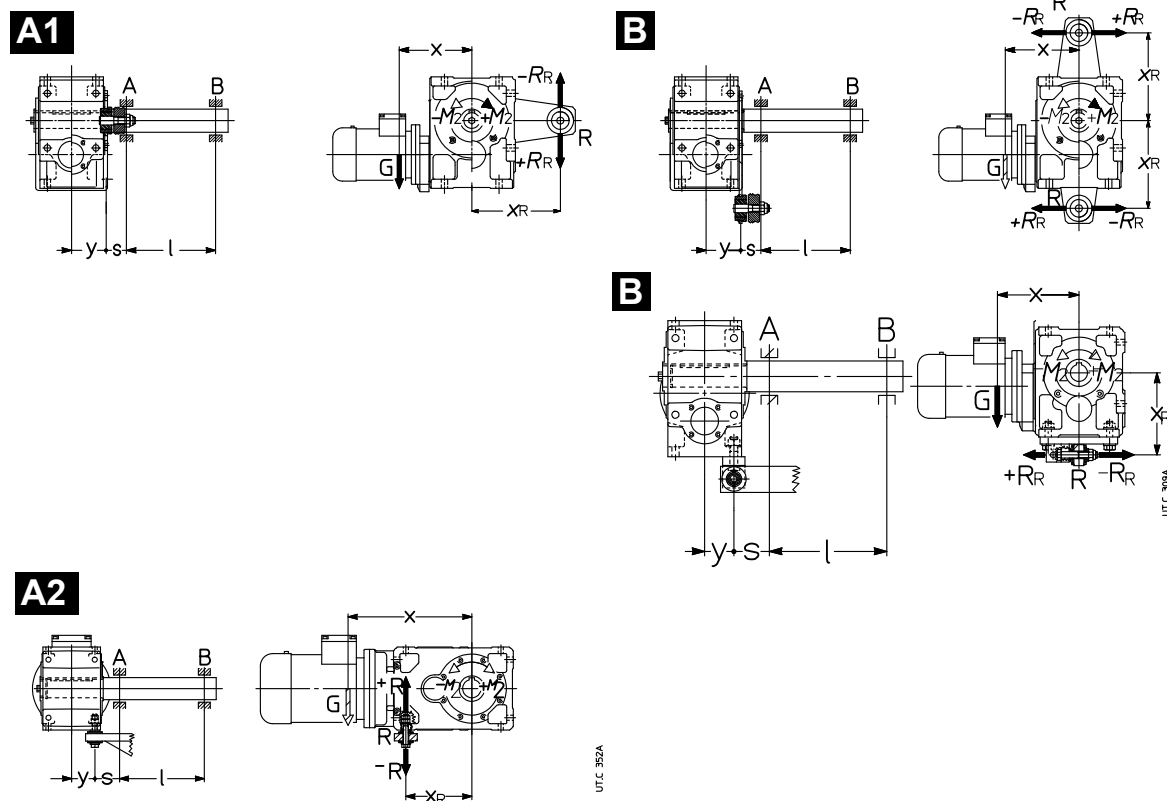

- G [lb]: weight of the gearmotor;
- T_2 [lb in]: output torque expressed by + or – according to the direction of rotation in the drawing;
- x [in]: for helical gearmotors dimension $x = 0$ (scheme A1 and B) or $x = 0.67 \cdot a$ (scheme A2) (ch. 12); for bevel helical gearmotors dimension $x = G + 0.2 \cdot Y$ (schemes A1 and B) or $x = a + G + 0.2 \cdot Y$ (scheme A2) (ch. 14);
- y [in]: for helical gearmotors dimension $y = 0.5 \cdot B + G + 0.2 \cdot Y$ (ch. 12); for bevel helical gearmotors dimension $y = 0.5 \cdot B$ (ch. 14);
- x_R [in]: see ch. 12, 14, 17;
- l, s [in]: dimension s must be as short as possible.

1) reaction R_R [lb] produced by support R :

$$R_R = (1 / x_R) \cdot [G \cdot x + (\pm M_2)]$$

2) bending moment M_{bA} through the cross-section of bearing A:

$$\text{A2} \quad M_{bA} = [G \cdot (y + s)] - [(\pm R_R) \cdot s] \quad [\text{lb in}]$$

$$\text{B} \quad M_{bA} = \sqrt{[G \cdot (y + s)]^2 + [R_R \cdot s]^2} \quad [\text{lb in}]$$

3) Radial reaction R_A produced by bearing A:


$$\text{A2} \quad R_A = \frac{1}{l} \{ [G \cdot (y + s + l)] - [(\pm R_R) \cdot (s + l)] \} \quad [\text{lb}]$$

$$\text{B} \quad R_A = \frac{1}{l} \sqrt{[G \cdot (y + s + l)]^2 + [R_R \cdot (s + l)]^2} \quad [\text{lb}]$$

4) radial reaction R_B [lb] produced by bearing B:

$$R_B = \frac{M_{bA}}{l}$$

5.9 - Fastening bolt dimensions for gear reducer feet

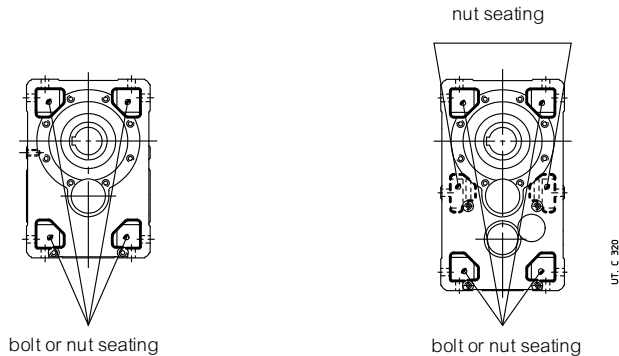

Gear reducer size	Bolt DIN 931 ANSI B18.2.1 (l max)
125, 140	M 16 × 55 5/8" - 11 x 2"
160, 180	M 20 × 70 3/4" - 10 x 2 3/4"
200, 225	M 24 × 90 1" - 8 x 3 1/2"
250, 280	M 30 × 110 1 1/4" - 7 x 4 1/4"
320 ... 360	M 36 × 130 1 1/2" - 6 x 5"

5.10 - Tightening torque

Unless otherwise stated, usually it is sufficient to use bolts in class 8.8;

- before tightening the bolt be sure that the eventual centering of flanges are inserted properly;
- the bolts are to be diagonally tightened with the maximum tightening torque.

Before tightening, carefully degrease the bolts: for strong vibrations, heavy duties, frequent motion reversals, apply a thread-braking seal Loxeal 23-18 or equivalent.

Table of tightening torque for fastening bolts (feet, flange)

Screw	Ts [lb in] DIN 931, DIN 912			Screw	Ts [lb in] ANSI B18.2.1, ANSI B18.3		
	cl. 8.8	cl. 10.9	cl. 12.9		Grade 5	Grade 8	FNL Grade 9
M4	26	35	-	-	-	-	-
M5	53	75	89	-	-	-	-
M6	97	135	175	1/4" - 20	76	107	126
M8	220	310	355	5/16" - 18	157	221	259
	[lb ft]				[lb ft]		
M10	37	51	63	3/8" - 16	23	33	38
M12	62	88	106	1/2" - 13	57	80	94
M14	99	140	170		57	80	94
M16	150	214	258	5/8" - 11	113	159	186
M18	206	295	354	3/4" - 10	200	282	331
M20	295	413	500		200	282	331
M22	405	568	685	7/8" - 9	322	455	533
M24	523	738	883	1" - 8	483	681	799
M27	738	1033	1254	1 1/8" - 7	596	966	1087
M30	1016	1437	1733	1 1/4" - 7	840	1363	1597
M33	1475	2066	2508	1 3/8" - 6	1102	1768	2094
M36	1845	2616	3096	1 1/2" - 6	1462	2371	2779

Table of tightening torque for plugs

Gear reducer size	Thread dimension	Ts [lb in]
125 ... 140	G 1/2"	125
160 ... 280	G 3/4"	125
320 ... 360	G 1"	220

Technical formulas

Main formulas concerning mechanical drives, according to the Technical System and International Unit System (SI).

Size	With Technical System units	With SI units
starting or stopping time as a function of an acceleration or deceleration, of a starting or braking torque	$t = \frac{Gd^2 \cdot n}{375 \cdot M} [s]$	$t = \frac{J \cdot \omega}{M} [s]$
velocity in rotary motion	$v = \frac{\pi \cdot d \cdot n}{60} = \frac{d \cdot n}{19,1} [m/s]$	$v = \omega \cdot r [m/s]$
speed	$n = \frac{60 \cdot v}{\pi \cdot d} = \frac{19,1 \cdot v}{d} [min^{-1}]$	$\omega = \frac{v}{r} [rad/s]$
acceleration or deceleration as a function of starting or stopping time	$a = \frac{v}{t} [m/s^2]$	
angular acceleration or deceleration as a function of a starting or stopping time, of a starting or braking torque	$\alpha = \frac{n}{9,55 \cdot t} [rad/s^2]$ $\alpha = \frac{39,2 \cdot M}{Gd^2} [rad/s^2]$	$\alpha = \frac{\omega}{t} [rad/s^2]$ $\alpha = \frac{M}{J} [rad/s^2]$
starting or stopping dis- tance as a function of a starting or stopping time, of a starting or braking velocity	$s = \frac{a \cdot t^2}{2} [m]$	$s = \frac{v \cdot t}{2} [m]$
starting or stopping angle as a function of an angular acceleration or deceleration, of a final or initial angular velocity	$\varphi = \frac{n \cdot t}{19,1} [rad]$	$\varphi = \frac{\omega \cdot t}{2} [rad]$
mass	$m = \frac{G}{g} \left[\frac{kgf \cdot s^2}{m} \right] \quad m \text{ is the unit of mass [kg]}$	
weight (weight force)	G is the unit of weight (weight force) [kgf]	$G = m \cdot g [N]$
force in vertical (lifting), horizontal, inclined motion of translation (μ = coefficient of friction; φ = angle of inclination)	$F = G [kgf]$ $F = \mu \cdot G [kgf]$ $F = G (\mu \cdot \cos \varphi + \sin \varphi) [kgf]$	$F = m \cdot g [N]$ $F = \mu \cdot m \cdot g [N]$ $F = m \cdot g (\mu \cdot \cos \varphi + \sin \varphi) [N]$
dynamic moment Gd^2 , moment of inertia J due to a motion of translation (numerically $J = \frac{Gd^2}{4}$)	$Gd^2 = \frac{365 \cdot G \cdot v^2}{n^2} [kgf \cdot m^2]$	$J = \frac{m \cdot v^2}{\omega^2} [kg \cdot m^2]$
torque as a function of a force, of a dynamic moment or of a moment of inertia, of a power	$M = \frac{F \cdot d}{2} [kgf \cdot m]$ $M = \frac{Gd^2 \cdot n}{375 \cdot t} [kgf \cdot m]$ $M = \frac{716 \cdot P}{n} [kgf \cdot m]$	$M = F \cdot r [N \cdot m]$ $M = \frac{J \cdot \omega}{t} [N \cdot m]$ $M = \frac{P}{\omega} [N \cdot m]$
work, energy in motion of translation, in rotary motion	$W = \frac{G \cdot v^2}{19,6} [kgf \cdot m]$ $W = \frac{Gd^2 \cdot n^2}{7160} [kgf \cdot m]$	$W = \frac{m \cdot v^2}{2} [J]$ $W = \frac{J \cdot \omega^2}{2} [J]$
power in motion of translation, in rotary motion	$P = \frac{F \cdot v}{75} [CV]$ $P = \frac{M \cdot n}{716} [CV]$	$P = F \cdot v [W]$ $P = M \cdot \omega [W]$
power available at the shaft of a single-phase motor (cos φ = power factor)	$P = \frac{U \cdot I \cdot \eta \cdot \cos \varphi}{736} [CV]$	$P = U \cdot I \cdot \eta \cdot \cos \varphi [W]$
power available at the shaft of a three-phase motor	$P = \frac{U \cdot I \cdot \eta \cdot \cos \varphi}{425} [CV]$	$P = 1,73 \cdot U \cdot I \cdot \eta \cdot \cos \varphi [W]$

Note. Acceleration or deceleration are understood constant; motion of translation and rotary motion are understood rectilinear and circular respectively.

HEADQUARTERS

Rossi S.p.A.

Via Emilia Ovest 915/A
41123 Modena - Italy

info@rossi.com
www.rossi.com

Rossi North America

3355 Martin Farm Road Suite #400
Suwanee, GA 30024 - United States

Phone +1 800 931 2044 - Fax 678-288-3658

info@rossi.com/northamerica
www.rossi.com/northamerica

2631.CAT.G NEMA.22.10-0-US EN

© Rossi S.p.A. Rossi reserves the right to make any modification whenever to this publication contents. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described.

The Customer is responsible for the correct selection and application of product in view of its industrial and/or commercial needs, unless the use has been recommended by technical qualified personnel of Rossi, who were duly informed about Customer's application purposes. In this case all the necessary data required for the selection shall be communicated exactly and in writing by the Customer, stated in the order and confirmed by Rossi. The Customer is always responsible for the safety of product applications. Every care has been taken in the drawing up of the catalog to ensure the accuracy of the information contained in this publication, however Rossi can accept no responsibility for any errors, omissions or outdated data. Due to the constant evolution of the state of the art, Rossi reserves the right to make any modification whenever to this publication contents. The responsibility for the product selection is of the Customer, excluding different agreements duly legalized in writing and undersigned by the Parties.